



2025

# **Guidanz<sup>®</sup> Diagnostic Toolkit – PC Application Training Material.**

VERSION 3.1



## CONTENTS

What's New .....	4
Version 3.1 .....	4
General Usage .....	4
Registration and Log In.....	4
Subscription Management .....	5
Subscription Levels .....	6
Subscription Expiration Notifications .....	6
Home/Start Page Overview .....	6
New Assessment.....	7
Pending Service Requests.....	7
Analyze Equipment .....	7
History and Templates.....	7
Offline Diagnostic Sessions .....	7
Scan Faults.....	8
Calibration Files .....	8
Guidanz service event management.....	8
Contact Cummins .....	8
Settings .....	8
Engine Driven Control Features .....	9
Service & RSGR Subscription.....	9
Adapter Connection .....	9
Multi – Level Security.....	10
Service Order Association .....	11
Intake .....	13
ECM Image Creation .....	15
Equipment Summary .....	15
Equipment Dataplate .....	15
Device Dashboard.....	15
Engine Dataplate.....	16
ECM Faults.....	16
Diagnostic Sessions.....	19
Data Monitor.....	24



Engine Settings .....	27
Calibrate Engine .....	28
Diagnostic Tests .....	34
Advanced Features .....	36
Trip Information .....	37
Images & Templates .....	38
Templates .....	42
Audit Trail .....	43
Immediate Assessment Subscription .....	44
Subscription functionality .....	44
New Assessment .....	44
Intake .....	44
Severity Codes .....	46
Prioritized Faults .....	46
Estimated Service Times .....	47
Creating a Service Request from Immediate Assesment .....	47
Create Guidanz service event management's Service Request .....	47
Pending Service Requests .....	48
Schedule Page .....	48
Performing Immediate Assessment from a Pending Service Request .....	49
Guest/ Registered User .....	49
Adapter Connection .....	49
INTAKE .....	49
Equipment Dataplate .....	51
ECM Faults .....	52
History and Templates .....	52
Scan Faults .....	52
Power System Features .....	52
PowerGen Plus Subscription .....	52
Analyze Equipment .....	52
Connecting to Controller .....	52
Intake .....	53
Equipment Summary .....	54
Equipment Dataplate .....	54



Device Dashboard.....	55
Commissioning .....	79
Scan Faults .....	80
Calibration Files.....	81
Simulator Mode .....	84
Guest/Registered Users .....	86
Analyze Equipment.....	86
Questions or Issues .....	91
Prerequisites .....	91
Supported Engine programs.....	91
Contact Cummins.....	92





## WHAT'S NEW

### VERSION 3.1

New Engine Features:

- Special Features
- Intapp Support
- Road Speed Governor Restriction license functionality

New Powergen Features:

- Commissioning
- Initial Calibration with .cap and .fdl files

## GENERAL USAGE

### REGISTRATION AND LOG IN

Guidanz Diagnostic Toolkit PC Application requires users to register before connecting to any Engine or Power Gen controller. New users can register for a free account by selecting the “register now” link or online at: [https://mylogin.cummins.com/web/IAM\\_NewRegistration?appid=a1a4N0000F2oKa](https://mylogin.cummins.com/web/IAM_NewRegistration?appid=a1a4N0000F2oKa)

If a user registered in China wants to log into the GuidanzPC Application, the user needs to change the region by clicking on the “Change region” link before login for authentication.

Please select the correct login for your scenario:

- External users: Email
- Internal (Cummins users): Corporate
- Legacy Email: Users with a non-email username

After successful Login users will need to set a PIN code and accept the EULA Terms and Conditions to land on home page.

PIN codes must match the following:

- PIN must be at least 6 numbers and can be up to 16 numbers long.
- The PIN cannot be an entire sequence of numbers such as 123456 or 654321
- The entire PIN cannot be a sequence that simply repeats two digits like 121212
- You cannot repeat any single number 4 or more times, such as 000012

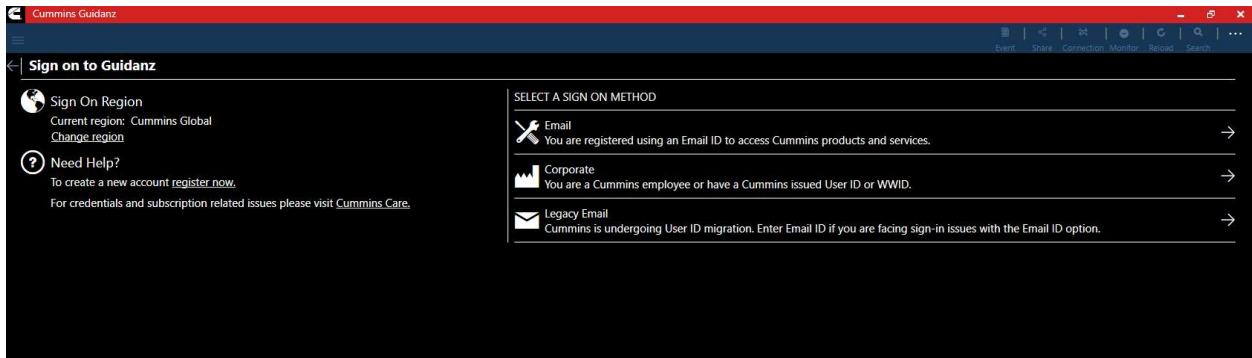


Figure 0-1 Sign on Page.

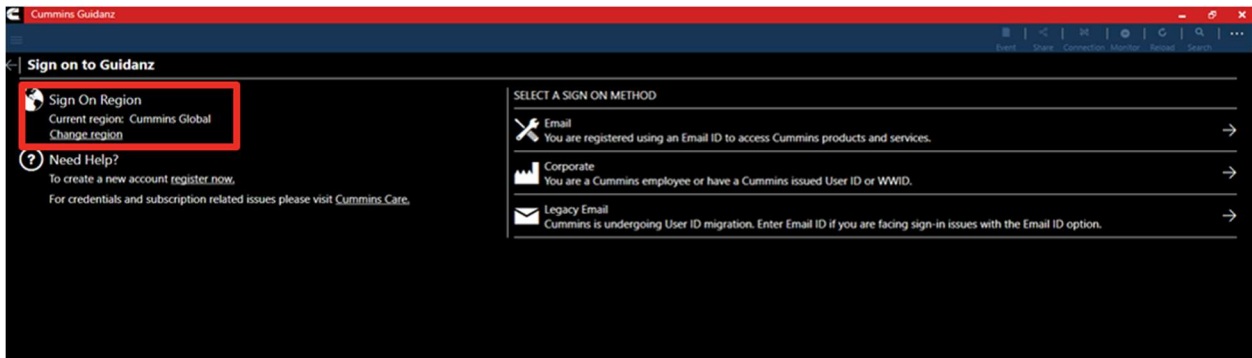


Figure 0-2 Region change icon.

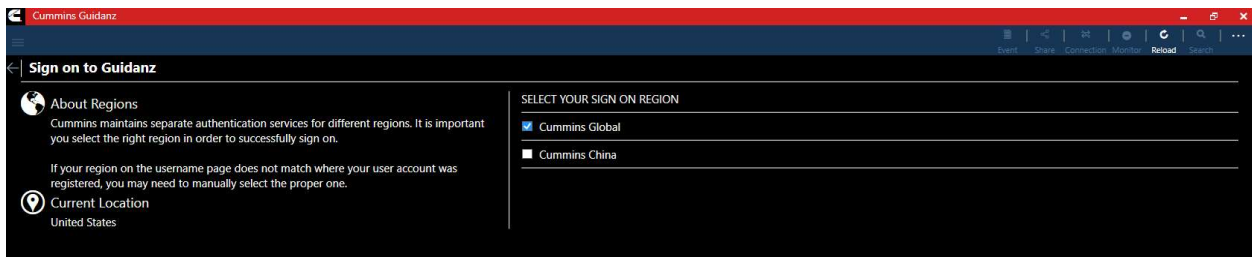


Figure 0-3 Region Selection Options.

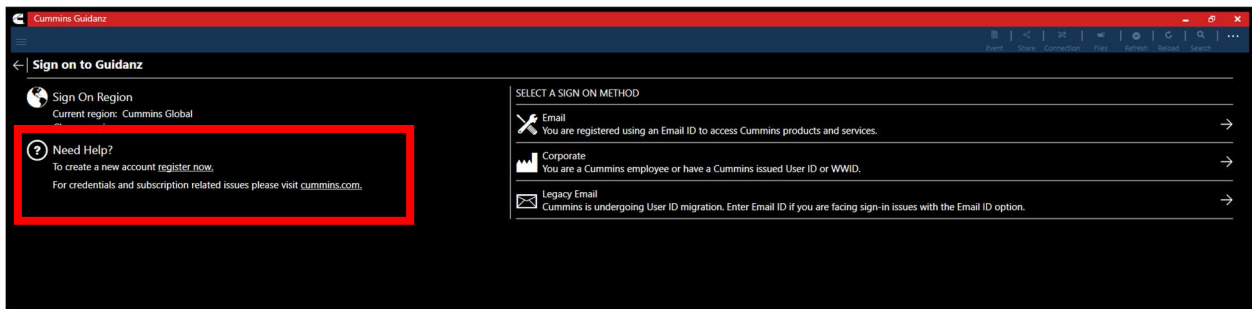


Figure 0-4 Register now link.

## SUBSCRIPTION MANAGEMENT

To view your current active subscriptions, users can navigate to: Settings → Account Management → Select the user under Profiles and Accounts → Subscription Management

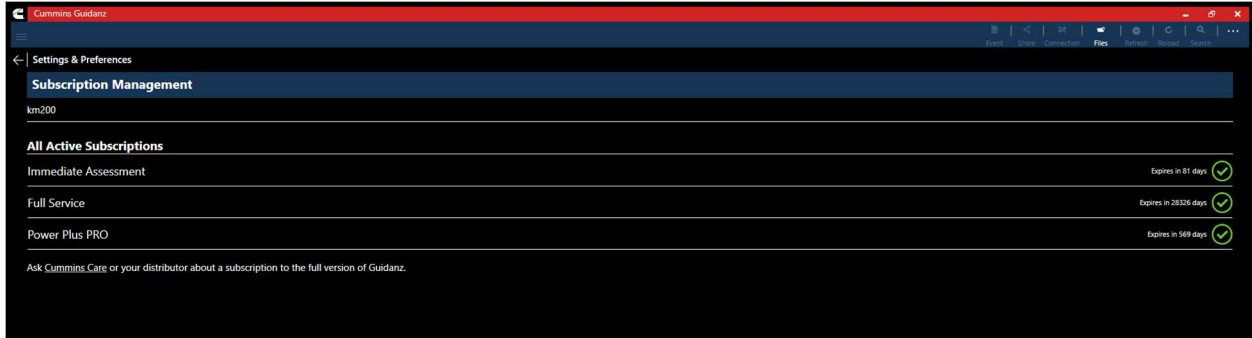


Figure 0-5 Subscription Management page.

## SUBSCRIPTION LEVELS

Guidanz Diagnostic Toolkit PC Application supports the following subscriptions. Please navigate to the specific document section to view features available for a specific subscription.

- Guest User
- Immediate Assessment (IA)
- Road Speed Governor Restrictions (RSGR)
- Service Diagnostics
- PPR (Power Plus Pro)

## SUBSCRIPTION EXPIRATION NOTIFICATIONS

When a user's subscription will expire in fourteen days or less, Guidanz Diagnostic Toolkit – PC Application will display a colored icon on the Subscription Management page.

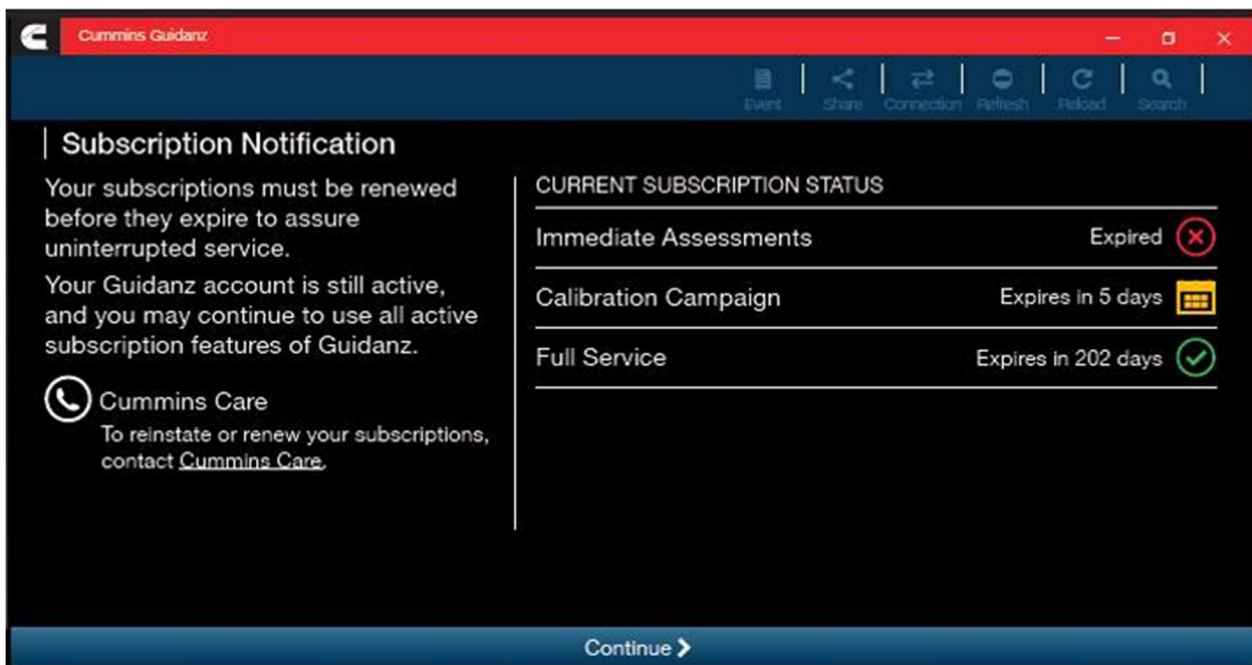


Figure 0-6 Subscription Expiration Notification.

## HOME/START PAGE OVERVIEW



After logging in, user will see the Home page.

Note: When the user is on the Home Page/Start Page, Guidanz is disconnected from the controller.

Note: Features displayed on the Home page are dependent upon the user's subscription level.



Figure 0-1 Home Page with all subscription options enabled.

## NEW ASSESSMENT

New Assessment allows IA users to Read and prioritize faults in the connected Engine. It also allows them to create a Service Request.

## PENDING SERVICE REQUESTS

Pending Service Requests allows users to view scheduled Service request on their calendar and connect to the vehicle to perform an Immediate Assessment.

## ANALYZE EQUIPMENT

Analyze Equipment allows users to connect to the Engine or Controller to read/reset faults, view Device Settings, run Diagnostic tests, and monitor parameter values.

## HISTORY AND TEMPLATES

History and Templates allows users to view and connect to ECM images, Controller Capture files, view Templates, and view or continue Diagnostic Sessions.

## OFFLINE DIAGNOSTIC SESSIONS

Diagnostic Sessions can be started or continued while offline by selecting the History and Templates icon from the Home screen, and then clicking the Diagnostic Sessions row.

Technicians can search Diagnostic Sessions created at their location by selecting "Search Online." The search options allow users to specify a Diagnostic Session or Engine Serial Number.

Not entering any Diagnostic Session number, or Engine Serial Number, allows the users to view all Diagnostic Sessions at their location based on the status and duration selected in the drop down menu.



Figure 0-2 Diagnostic Session Search page.

## SCAN FAULTS

Scan Faults is a quick connection that takes the user directly to the Faults page.

## CALIBRATION FILES

Calibration files allow the user to view the currently downloaded calibration files, PowerGen customer, the ability to download packages and view downloaded Feature files while not connected to a controller.

## GUIDANZ SERVICE EVENT MANAGEMENT

Link that takes users directly to the Guidanz Web login screen.

## CONTACT CUMMINS

Contact Cummins allows users to call, email, or navigate to the Cummins Support Team.

## SETTINGS

Settings allows the user to manage their account, and change displays settings like Units of measure & and work order creation on connection.

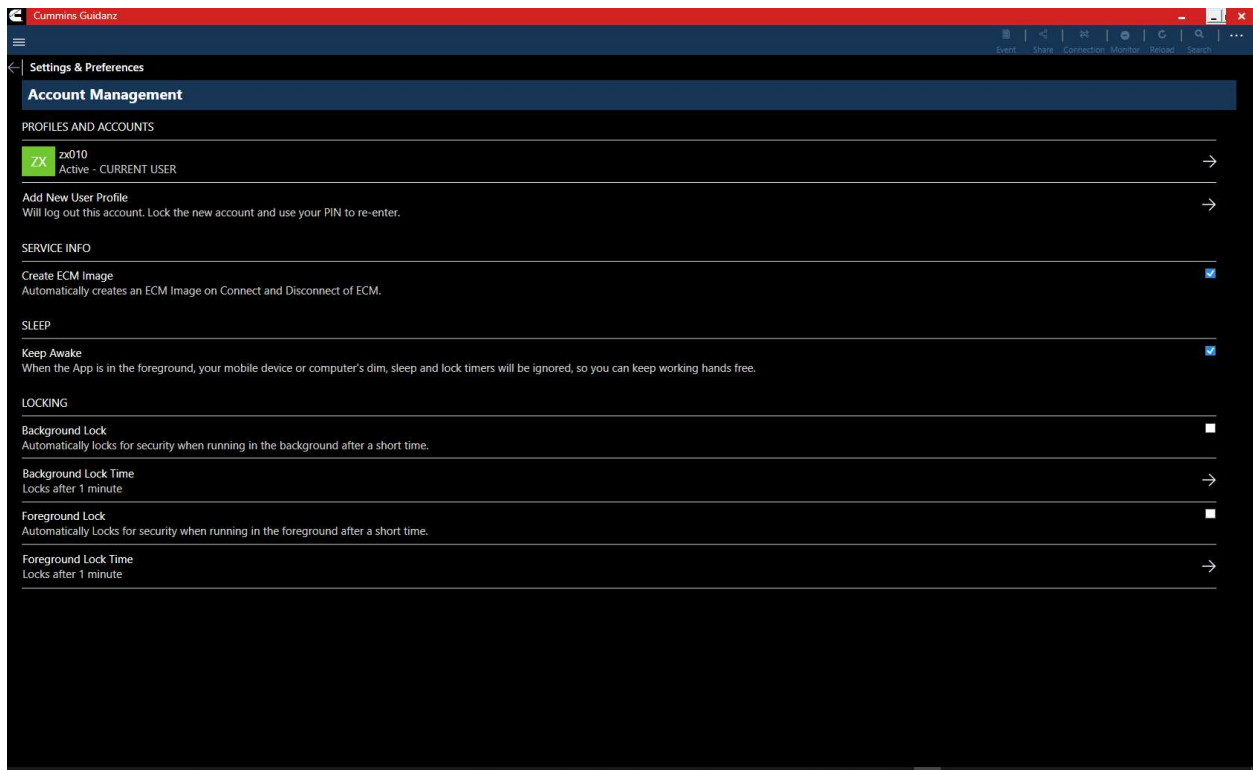


Figure 0-3 Settings Page

## ENGINE DRIVEN CONTROL FEATURES

### SERVICE & RSGR SUBSCRIPTION

#### ADAPTER CONNECTION

When New Assessment, Analyze Equipment, or Scan Faults is selected, the tool will offer a list of supported adapters to connect to the ECM

The page is broken into two sections USB adapters & Paired Bluetooth adapters. If a previously paired Bluetooth adapter is nearby, it will show as available.

Users can Select the adapter they are currently using to continue the connection.

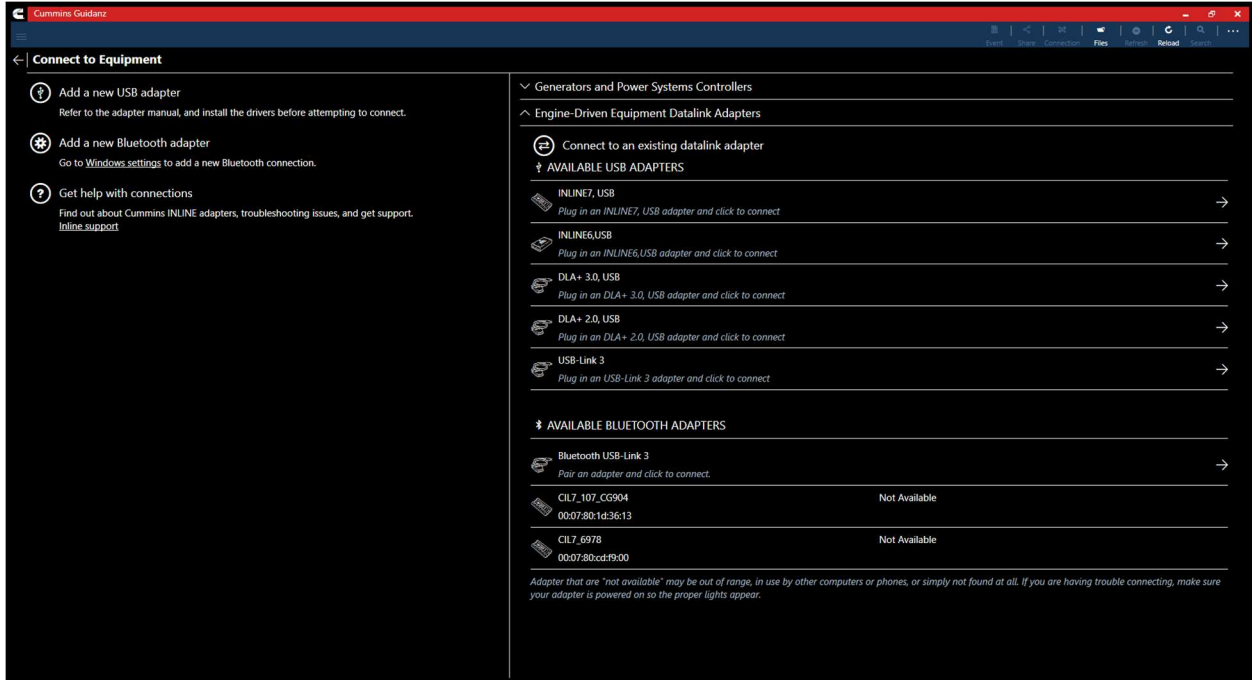


Figure 0-1 Adapter Connection Screen

## MULTI – LEVEL SECURITY

During connection, if the ECM has a password set, users will be prompted to enter the password to complete the connection.

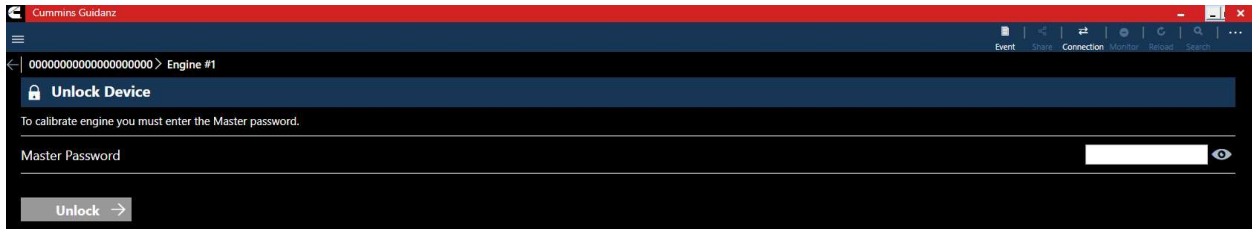


Figure 0-2 MLS Unlock screen during connection.

The MLS screen can also be accessed through the Toolbar 3 dot menu. Technicians can set, lock, unlock, and remove ECM passwords through the Manage Passwords screen.

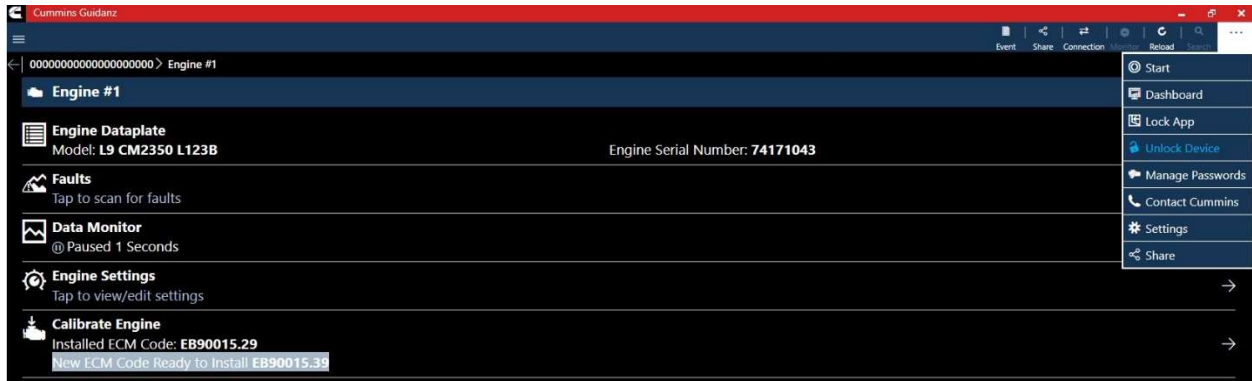


Figure 0-3 Unlock device option from Toolbar.

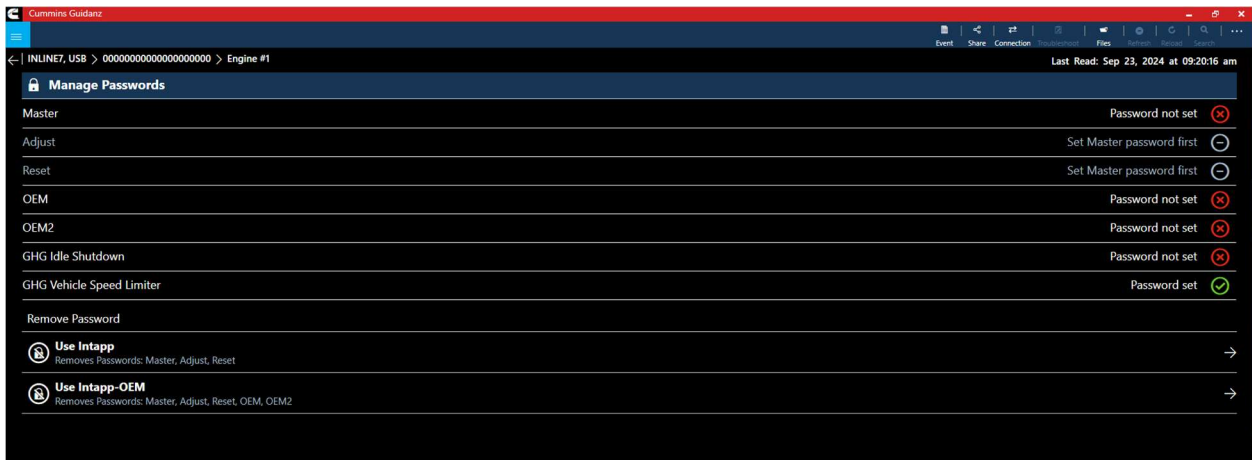


Figure 0-4 Manage Passwords screen


---

## SERVICE ORDER ASSOCIATION


After connection to the vehicle is established, the application will pull all service assigned to technicians from the Guidanz Web servers. By default, only service orders that match the ESN pulled from the vehicle will be shown. Technicians can display all service orders assigned to them by unchecking the “Show Service Orders compatible with the connected equipment” checkbox. If your site does not subscribe to Guidanz Web, or you do not have a Service Order assigned, you can skip the association by selecting the “Continue without Service Order” link.

\*Using this link will not send any information from the Guidanz Diagnostic Tool Kit to Guidanz SEM



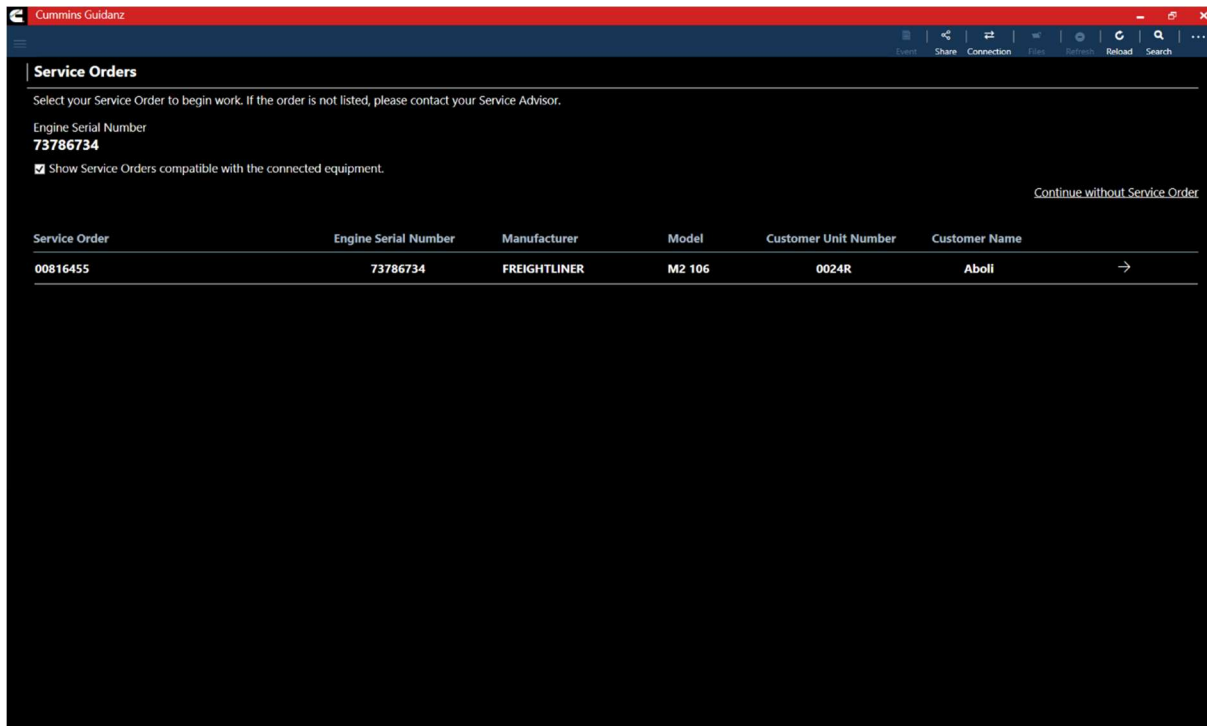

After Intake is completed with an associated Service Order, Guidanz Diagnostic Tool Kit – Windows will automatically send the vehicle and Fault data to Guidanz Service Event Management.

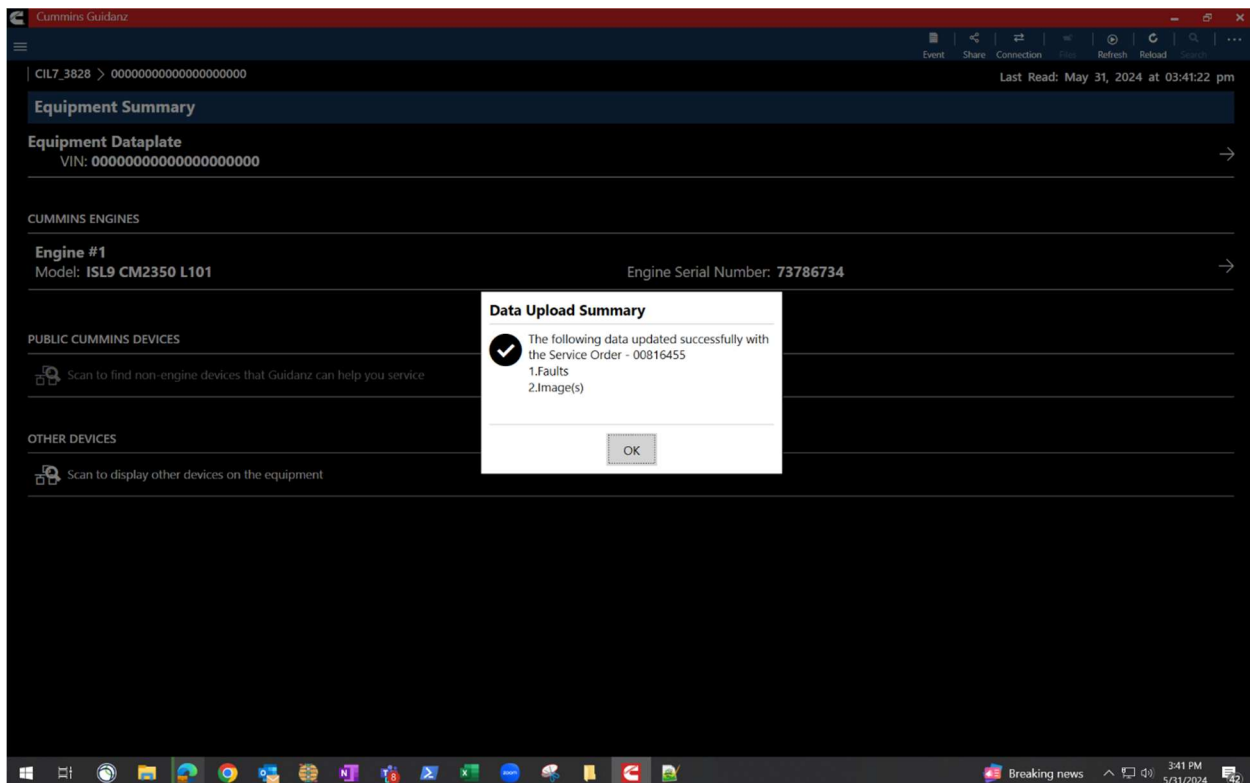



## INTAKE

During the Intake process, the application will connect to the selected Datalink adapter and pull the vehicle, engine serial number and Customer Name. Users can edit and change this information if they are incorrect.

The intake page also offers the ability to automatically create an ECM image during intake if desired. The default behavior of the “Create ECM Image” checkbox is controlled on the [Settings](#) Page.

The screenshot shows a web browser window with the title 'Cummins Guidanz'. The page content is as follows:

- Section: **Engine and Customer Information**
- Text: To give you accurate diagnostics data, first we need some information.
- Field: Customer Name: Cummins
- Field: Engine Serial Number: 74171043
- Field: Complaint or Other Notes: Optional
- Checkbox: Create ECM Image
- Button: Continue →

**Figure 0-5 Engine serial number pulled from ECM. Users can edit.**

Based on the confirmed ESN, the equipment make and model list is retrieved from the server. The application pre-selects the data received from warranty data on the server and from the ECM if available. The user will still need to confirm these selections.

If there is no manufacturer list, it can be caused by:

- No data based on the ESN provided
- No Internet
- Server maintenance or downtime

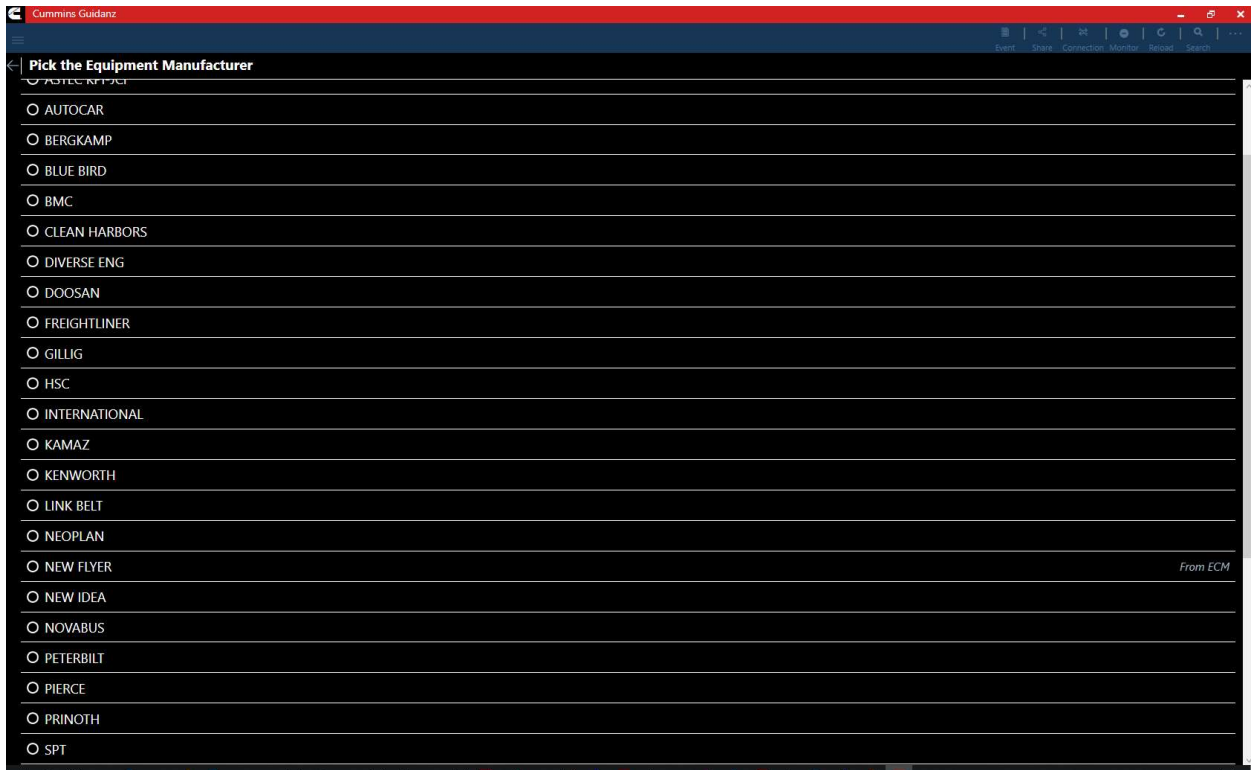


Figure 0-6 Make screen

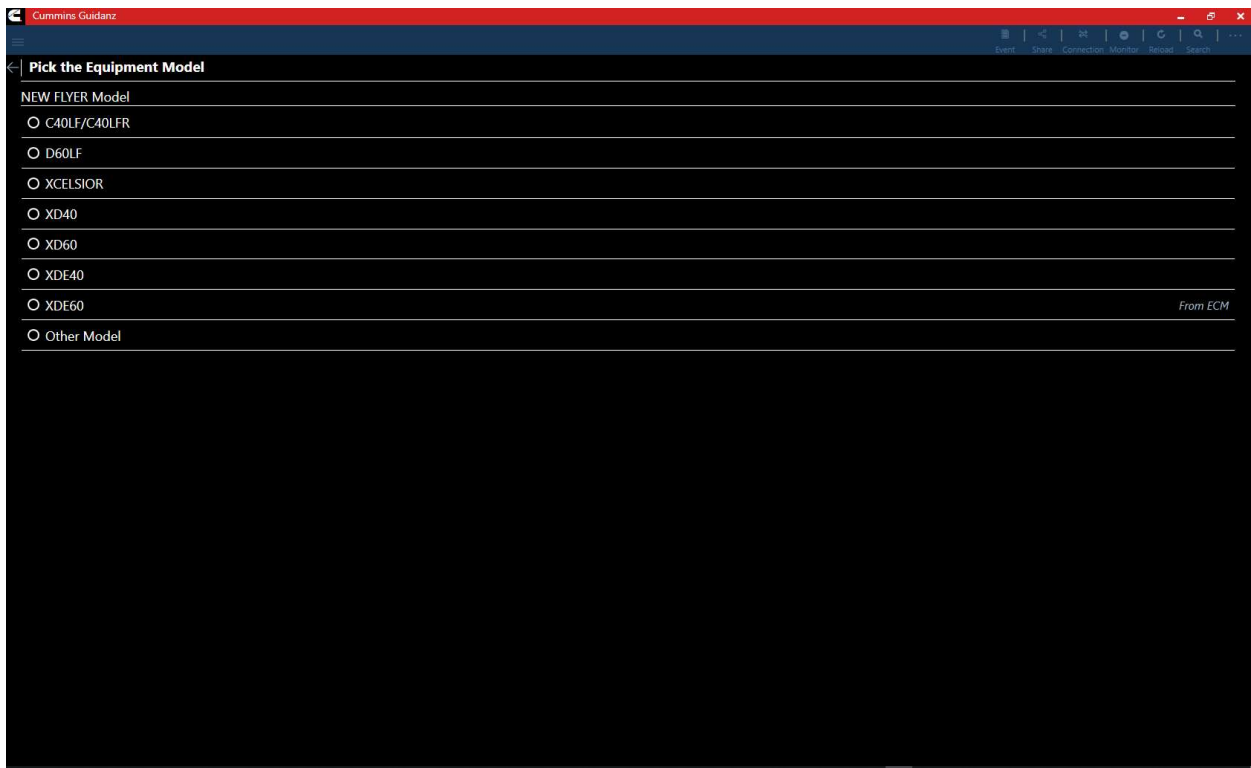


Figure 0-7 Model Screen



---

## ECM IMAGE CREATION

An ECM image is a snapshot of the state of the controller at the time the image is created. ECM Images include Faults, Device Settings, and Audit Trail information that can be exported and mail to other users of both Guidanz Diagnostic Toolkit PC Application and INSITE.

---

## EQUIPMENT SUMMARY

The Equipment Summary screen will show (if available):

- Equipment Dataplate
- Cummins Engines or control modules
- Public Cummins devices
- Other devices

---

## EQUIPMENT DATAPLATE

The Equipment Dataplate can be accessed via the Equipment Summary Screen and Engine Dataplate. It contains the information the user enters such as customer name, manufacturer, model, and well as other information.

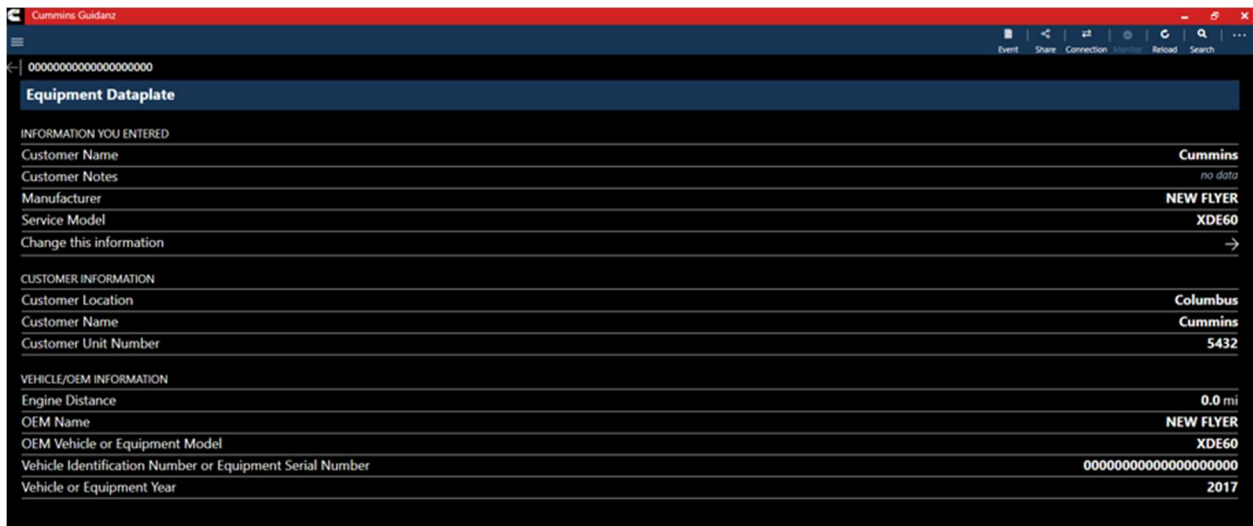


Figure 0-8 Equipment Dataplate screen

---

## DEVICE DASHBOARD

The device dashboard can be accessed by clicking on a Cummins engine/control module, Public Cummins device or other device from the Equipment Summary screen. The device dashboard shows all functionality available for the specific device.



Figure 0-9 Device Dashboard for a Cummins ECM

## ENGINE DATAPLATE

The Engine Dataplate can be accessed via the device dashboard. The Dataplate contains information read from the ECM such as calibration information, ESN stored in the ECM, and system information.



## ECM FAULTS



Selecting Faults on the Device dashboard displays the Faults and Analysis screen (internet connectivity required) with Primary, Related, & Unprioritized faults.

---

## PRIORITIZED, SECONDARY, & UNPRIORITIZED FAULTS

Primary Faults are critical faults that should be repaired first. Resolving the primary faults will many times also resolve secondary faults.

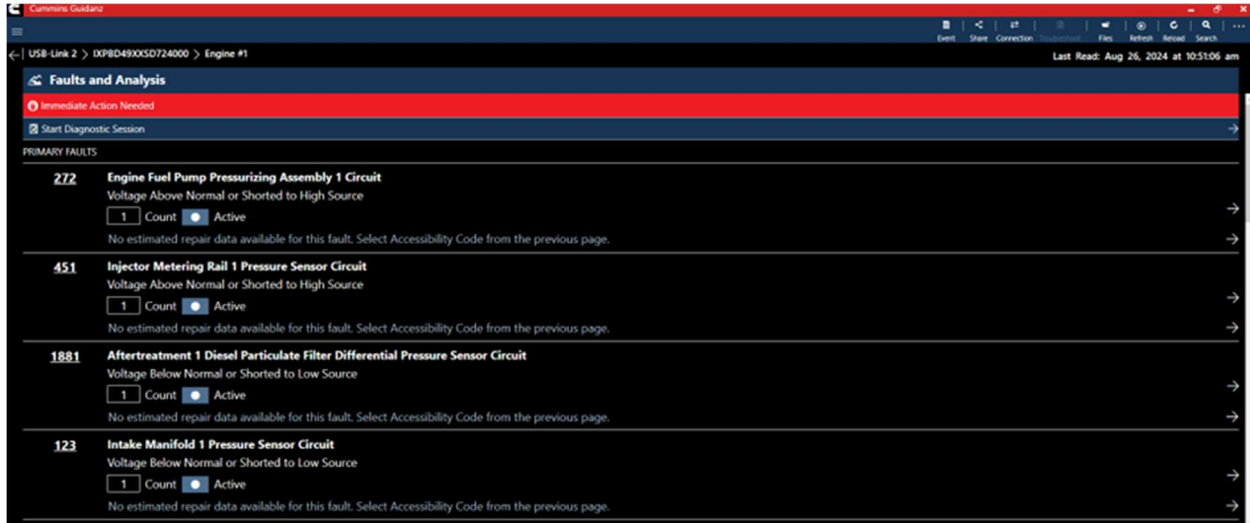


Figure 0-10 Faults screen from Cummins ECM

---

## FAULT SNAPSHOT

Clicking on an individual Cummins Fault Code displays the Fault Details and snapshot (if supported.)



**451 Injector Metering Rail 1 Pressure Sensor Circuit**  
Voltage Above Normal or Shorted to High Source

FAULT INFORMATION

1	Count
<input checked="" type="checkbox"/>	Active
157	SPN
3	FMI

003011:41:47 ECM Time (Key On Time) (h:m:s)

000121:02:38 Engine Hours (h:m:s)

0	Keyoffs
---	---------

Parameter	First	Last
Aftertreatment Diesel Exhaust Fluid Dosing Unit State	Initializing	Initializing
Aftertreatment Diesel Exhaust Fluid Dosing Valve Commanded Position	Closed	Closed
Aftertreatment Diesel Exhaust Fluid Pressure(psi)	-14.5	-14.5
Aftertreatment Diesel Exhaust Fluid Tank Heating Valve Position Commanded	Closed	Closed
Aftertreatment Diesel Exhaust Fluid Tank Level(Percent)	0	0
Aftertreatment Diesel Exhaust Fluid Tank Temperature(°F)	-58	-58
Aftertreatment Diesel Oxidation Catalyst Intake Temperature(°F)	32.0	32.0
Aftertreatment Diesel Particulate Filter Differential Pressure(InHg)	-0.32	-0.32
Aftertreatment Diesel Particulate Filter Intake Temperature(°F)	32.0	32.0
Aftertreatment Diesel Particulate Filter Operating State	Inactive	Inactive
Aftertreatment Diesel Particulate Filter Outlet Pressure(InHg)	-1.84	-1.84
Aftertreatment Diesel Particulate Filter Outlet Temperature(°F)	32.0	32.0

Figure 0-11 Cummins Fault Details and Snapshot

## FIS (FAULT INFORMATION SYSTEM)

Clicking on a fault code number will open the respective Fault Information System (FIS) file in a web browser (Internet required.)



https://quickserve.cummins.com/integrations/pubby12/ml/en/procedures/505/505-fc451.html

Injector Metering Rail 1 Pressure Sensor Circuit - Voltage Above Normal or Shorted to High Source

Overview

Codes	Reason	Effect
Fault Code: 451 PID(P): P157 SPN: 157 FMI: 3/3 Lamp: Amber SRT:	High signal voltage detected at the fuel rail pressure sensor circuit.	Progressive power and/or speed derate increasing in severity from time of alert. If the Engine Protection Shutdown feature is enabled, the engine will shut down 30 seconds after the red STOP lamp starts flashing.

LARGE  
Injector Metering Rail 1 Pressure Sensor Circuit

Circuit Description

The engine control module (ECM) provides a 5 volt supply to the fuel rail pressure sensor using a dedicated sensor supply circuit. The ECM also provides a ground on the sensor return circuit. The fuel rail pressure sensor

Figure 0-12 QSOL Fault Code FIS file.

## CLEARING FAULT CODES

- To clear fault codes, click on the right-hand top Menu option and select Clear All Faults.
- After user confirms to Clear All Faults Codes, app continues to Key Off/Key On process.
- At the end of the process, app confirms Faults cleared successfully.
- If user Cancels, no faults will be cleared.

Figure 0-13 Fault Screen with Clear all Faults menu selected

## DIAGNOSTIC SESSIONS

## CREATING





Diagnostic Sessions can be created or continued from the Faults screen by click “Start Diagnostic Session.” After selecting to start a new Diagnostic Session, or continue one already started, the app will display the equipment information screen. Please confirm or change the information as needed, and click Continue to begin/resume the Diagnostic Session.

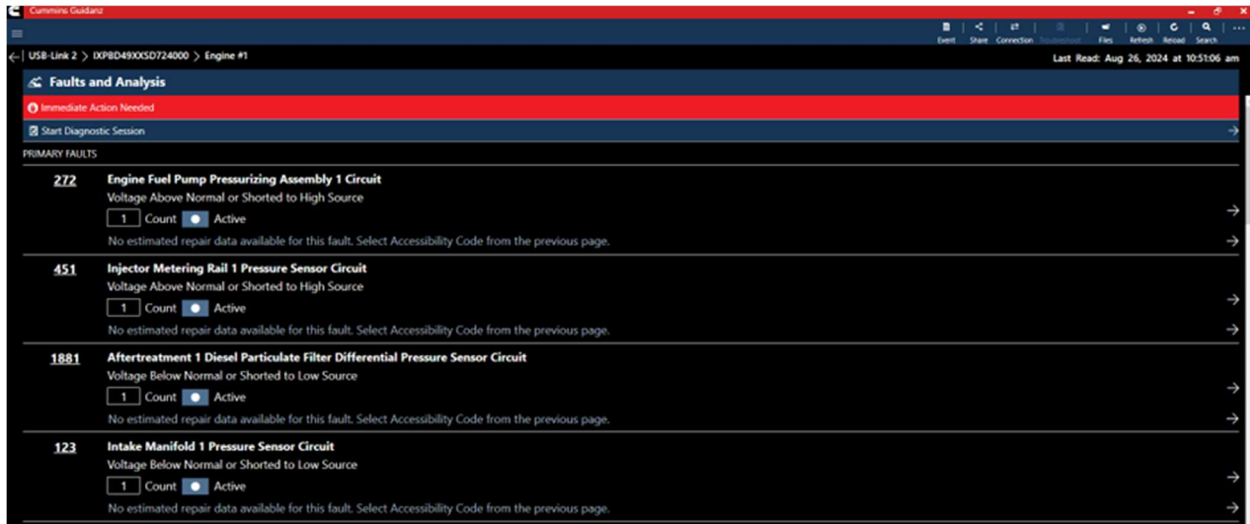


Figure 0-14 Access to Diagnostic Session

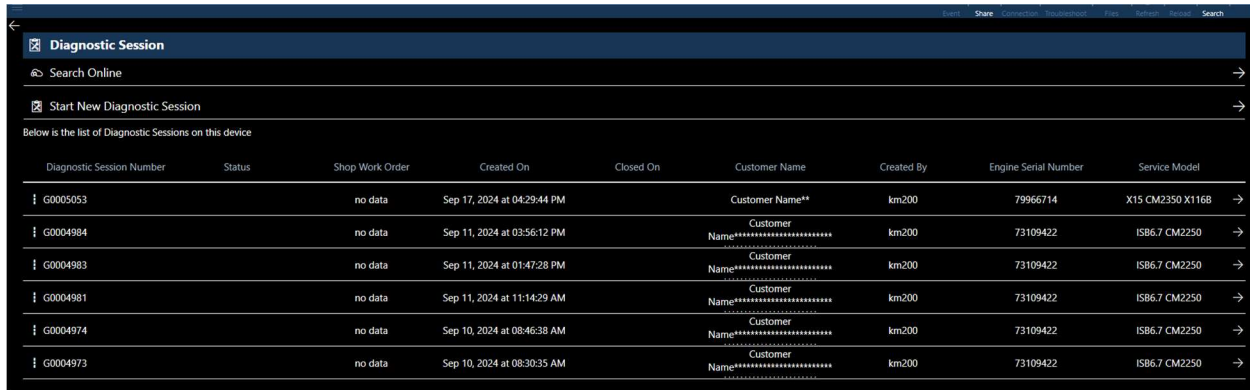


Figure 0-15 Diagnostic Session New/Continue selection screen

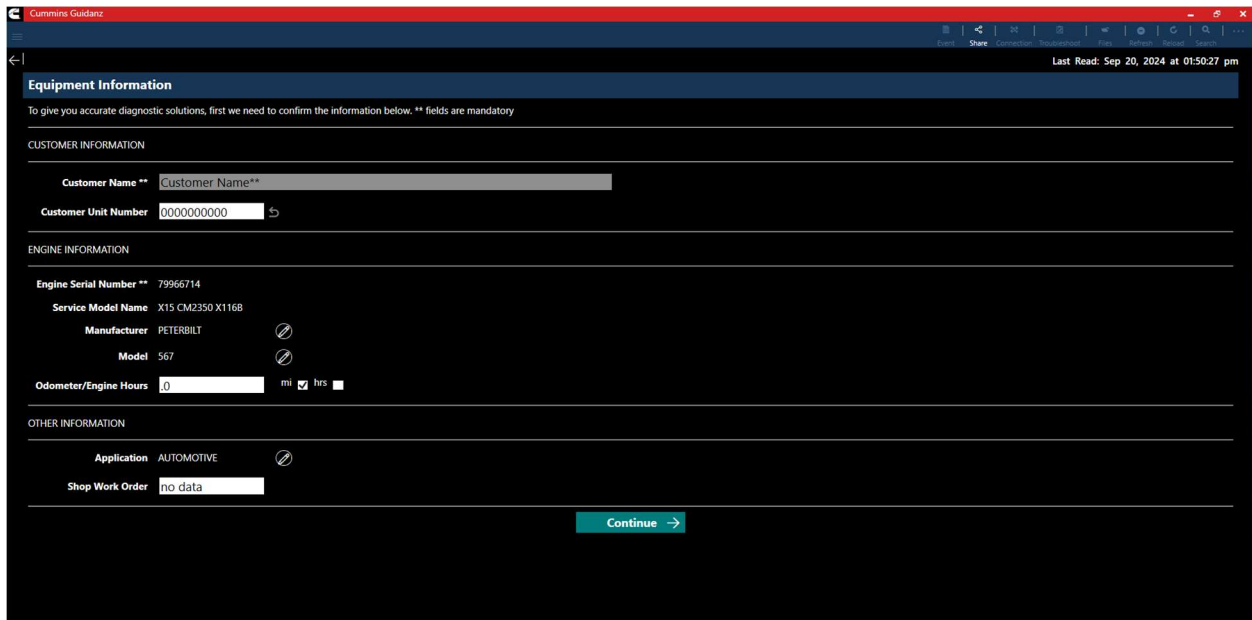


Figure 0-16 Diagnostic Session Equipment Information Screen

## SOLUTIONS

The Diagnostic Session is displayed in its own window, allowing technicians to navigate to other areas of the tool, while still having access to the troubleshooting trees.

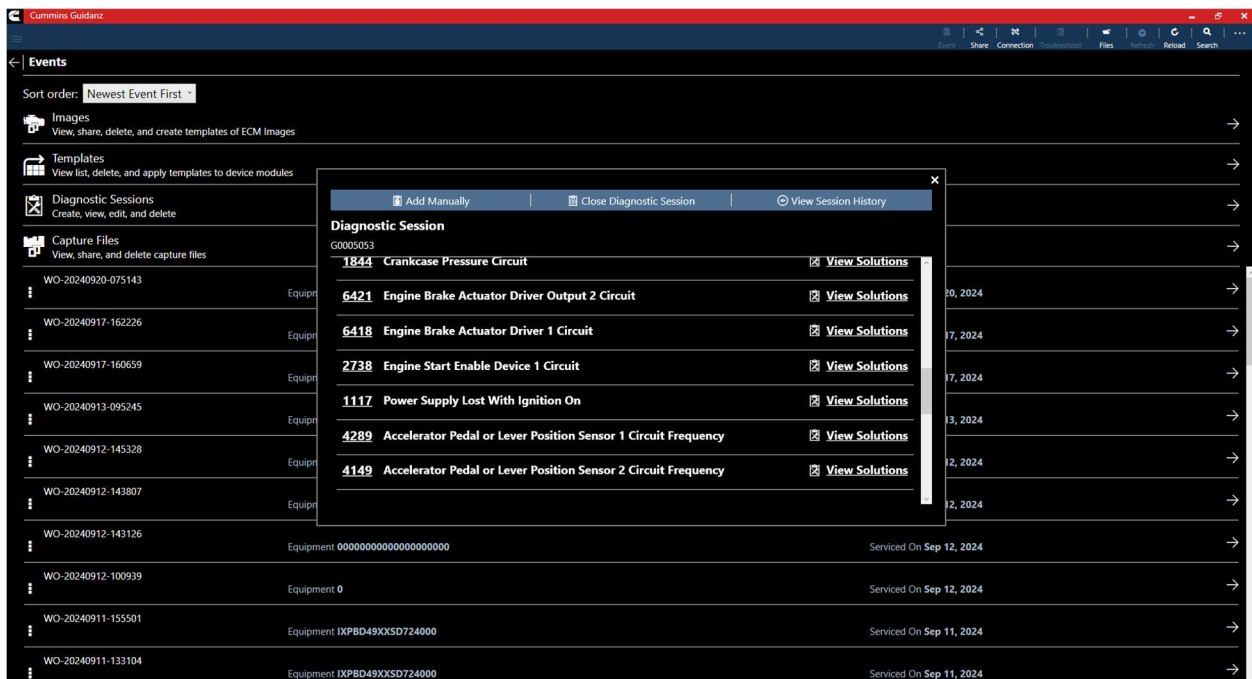


Figure 0-17 Open Diagnostic Session Window

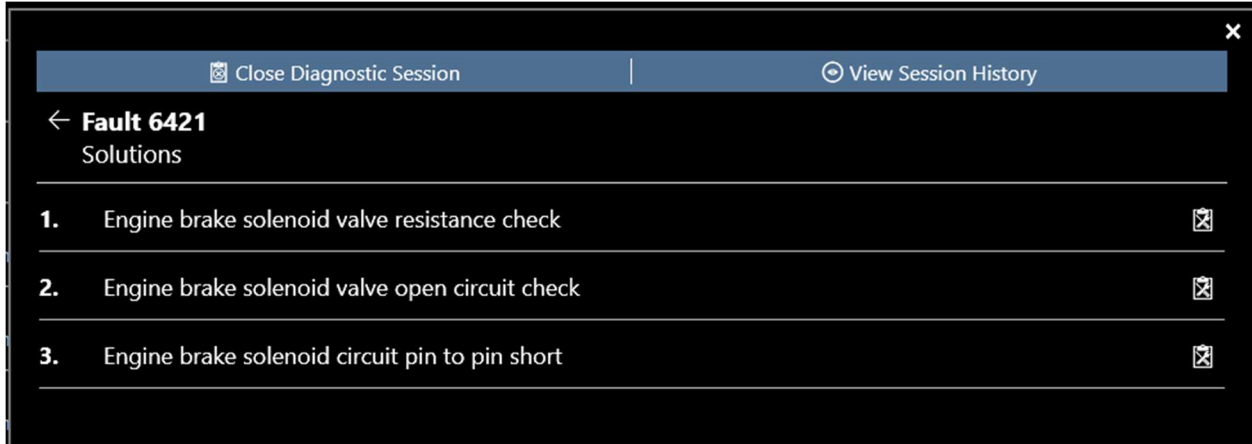


Figure 0-18 Solutions

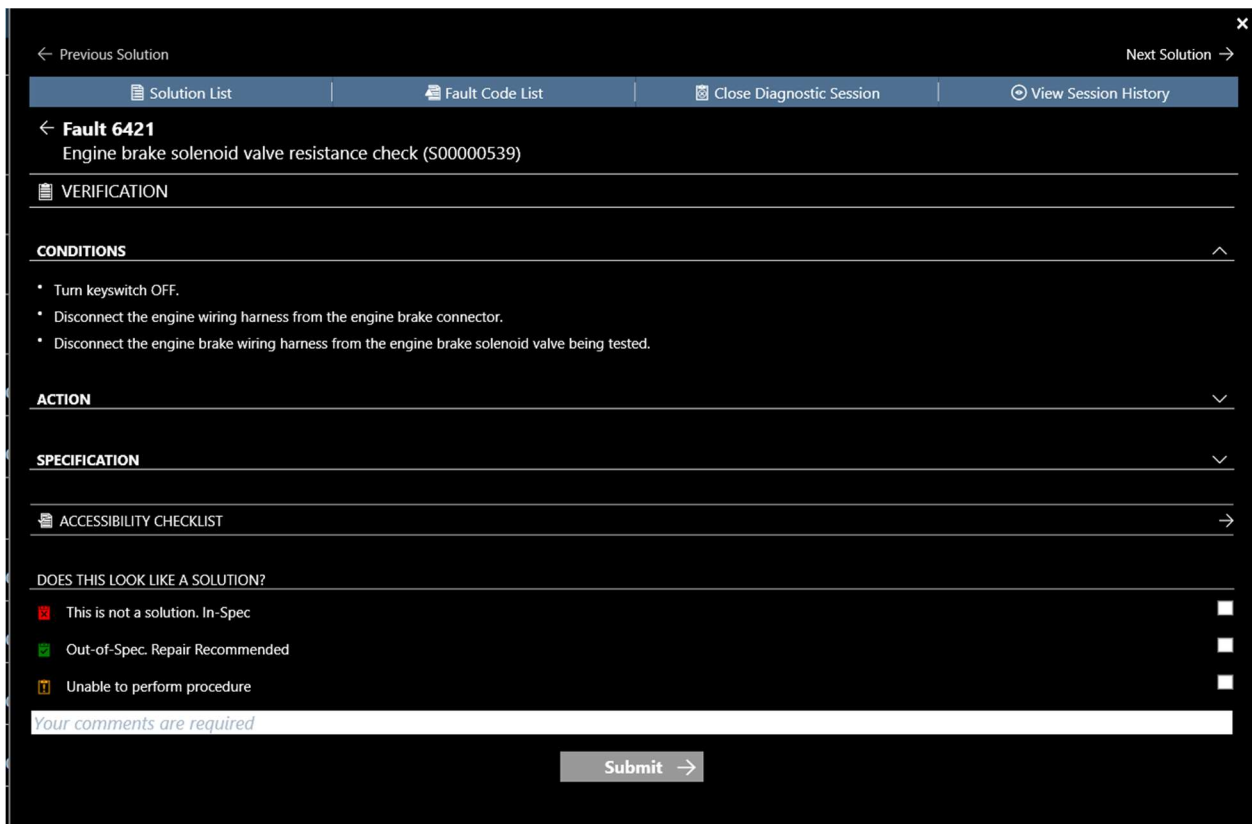


Figure 0-19 Accessibility Checklist and troubleshooting solution

## ACCESSIBILITY CHECKLIST

The Accessibility Checklist for a fault is accessible by click the “ACCESSIBILITY CHECKLIST” row in the Diagnostic Session container. After selecting the required items, scroll down and click the Submit button to add the checklist items to the Diagnostic Session.

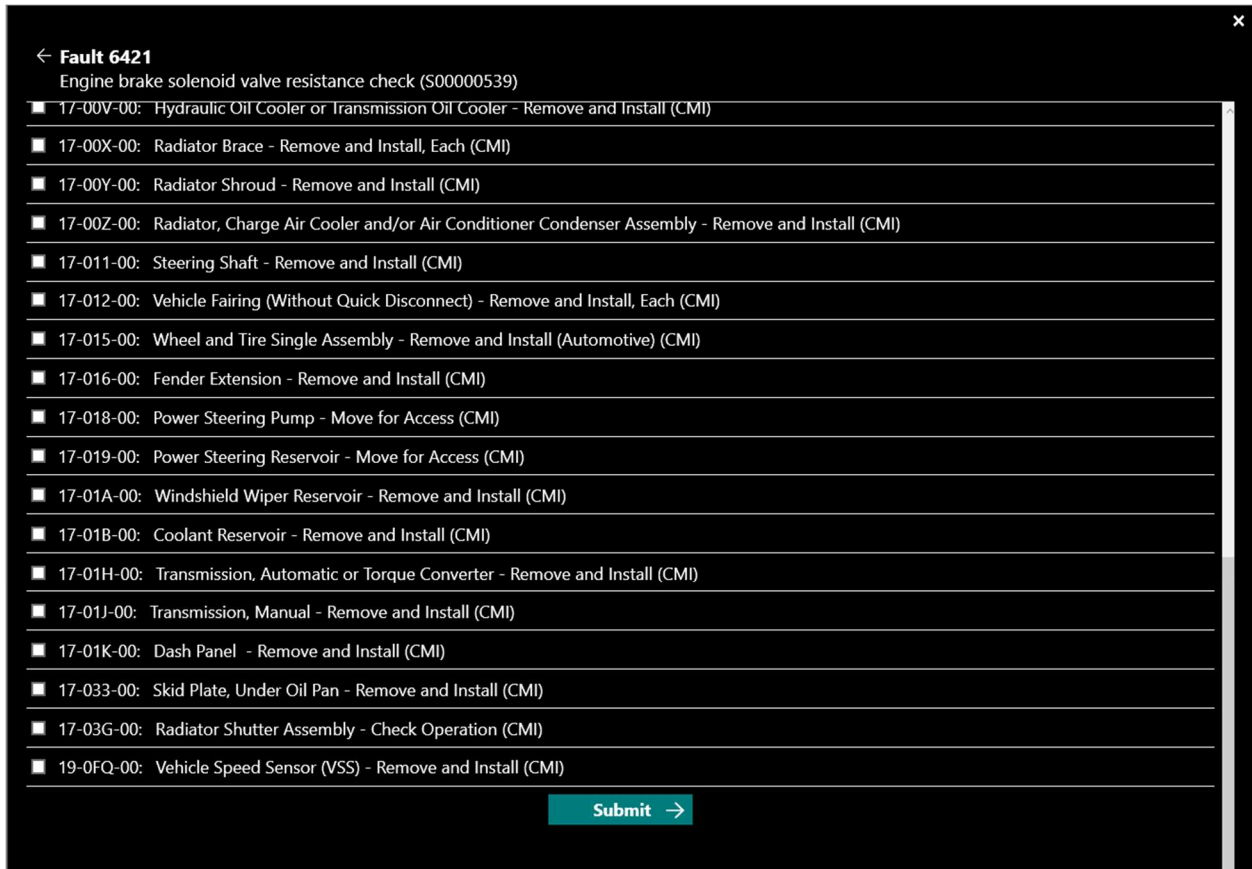


Figure 0-20 Accessibility Checklist screen

## SOLUTIONS

After verifying the Solution specification, select the appropriate outcome and comments. After completion, the “Submit” button will become enabled to allow the Diagnostic Session to be updated with the resolution.

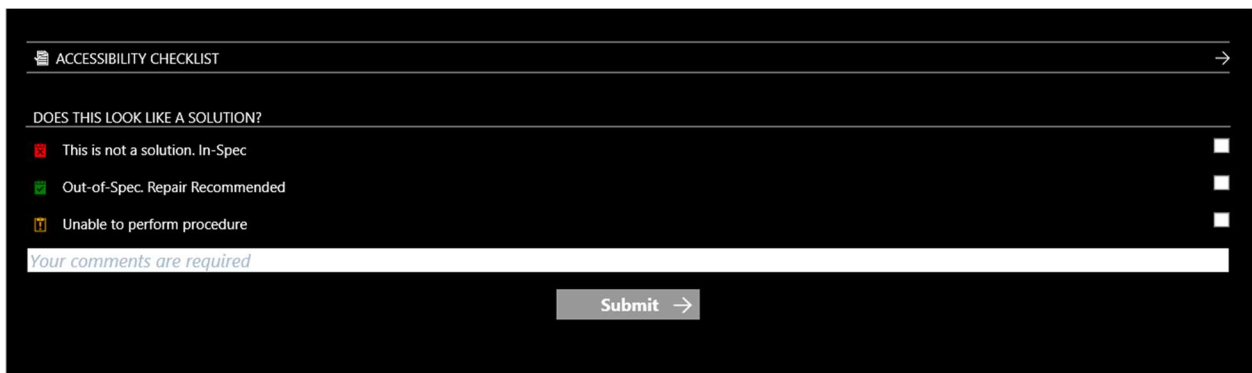


Figure 0-21 Troubleshooting Solution

## VIEWING AND SHARING DS HISTORY



The Diagnostic Session can be shared over email by selecting “View Session History” from the top Window bar, and then selecting “Share”.

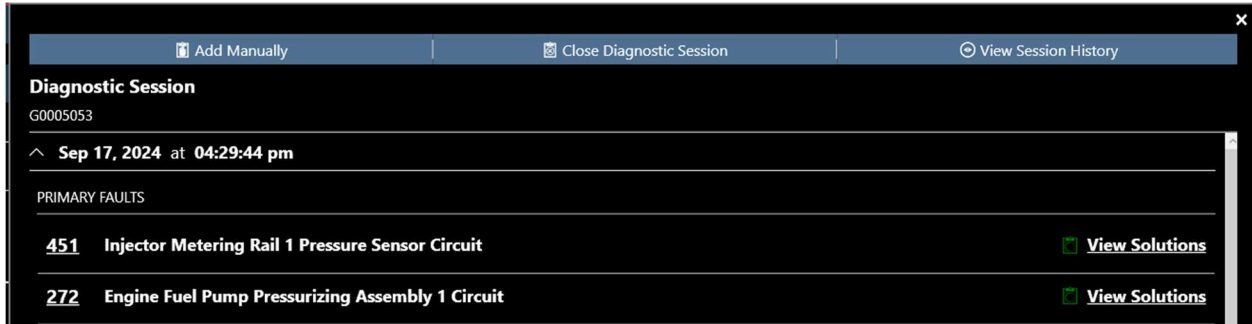


Figure 0-22 Diagnostic Session screen

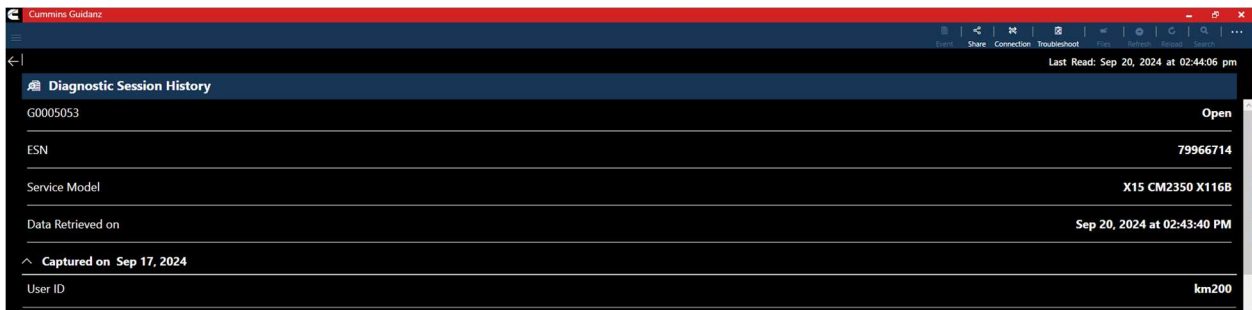


Figure 0-23 Diagnostic Session History

---

## DATA MONITOR

Clicking on Data Monitor on the ECM Device Dashboard takes the user to the Data Monitoring screen which allows the user to monitor and record parameters. Parameters are divided into pre-defined groups that can be selected based on the vehicle behavior being experienced. When clicking on Monitor the user can monitor all parameters while ECM is running.

---

## MONITORING

From the monitoring screen users can perform the below actions:

- Open the Data Monitoring control screen by selecting the Monitoring, Recording, or Stop button.
- Modify the Sampling rate by clicking the sampling rate and end time button on the bottom right of the screen.
  - Note Setting the sampling rate too low can cause connection issues.
- Start the recording process by clicking on the Record button.
- Start Graphical monitoring by clicking the Visual Data button.

---

## RECORDING



Using the recording function will allow users to save a csv file of the data. While recording, each time the user clicks the Pause button or leaves the DML screen a record file is created and stored in:  
C:\Users\Public\Documents\Cummins\Guidanz\Exports

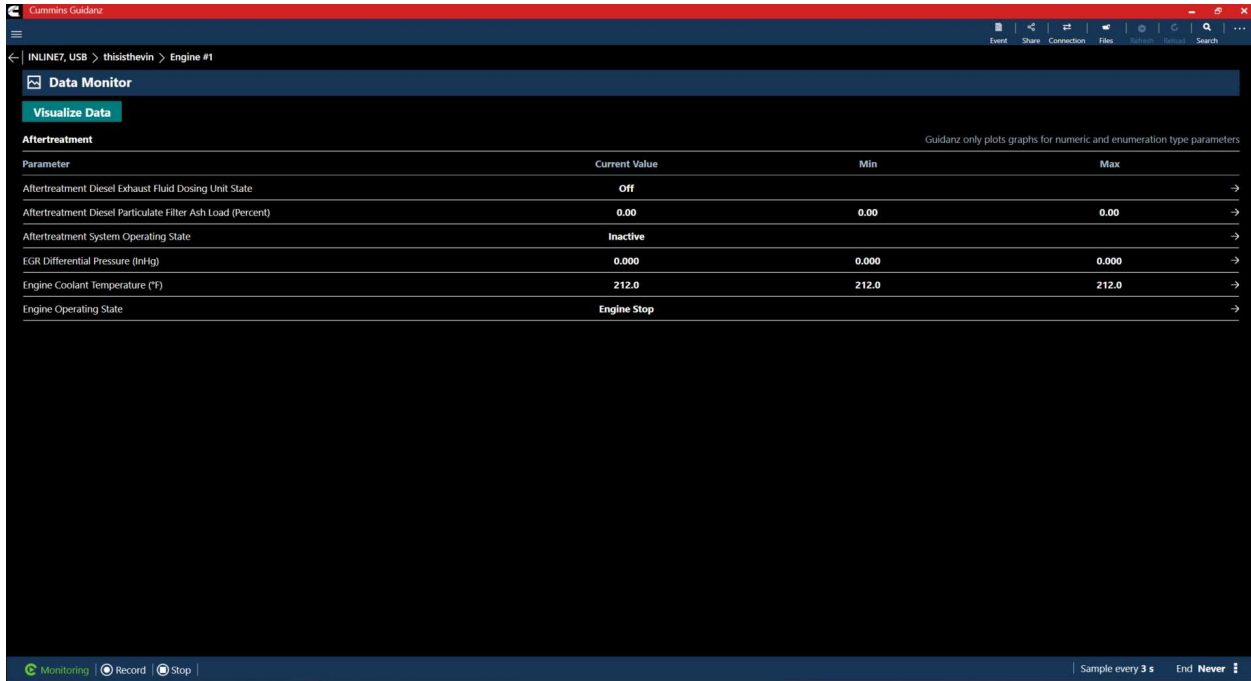


Figure 0-24 DML while recording

## GRAPHICAL MONITORING

Selecting the “Visualize Data” button, allows users to create a graphical representation of numerical and enumeration type parameters.

After selecting parameters to graph, users can use the following actions to control the graph:

1. Left click in graph to stop auto-scrolling.
2. Double click when stopped, to resume auto-scrolling.
3. Annotate any point on the graph by right- clicking.
4. Group or separate graphs with the same units by selecting the “Grouped” or “Separate” buttons.

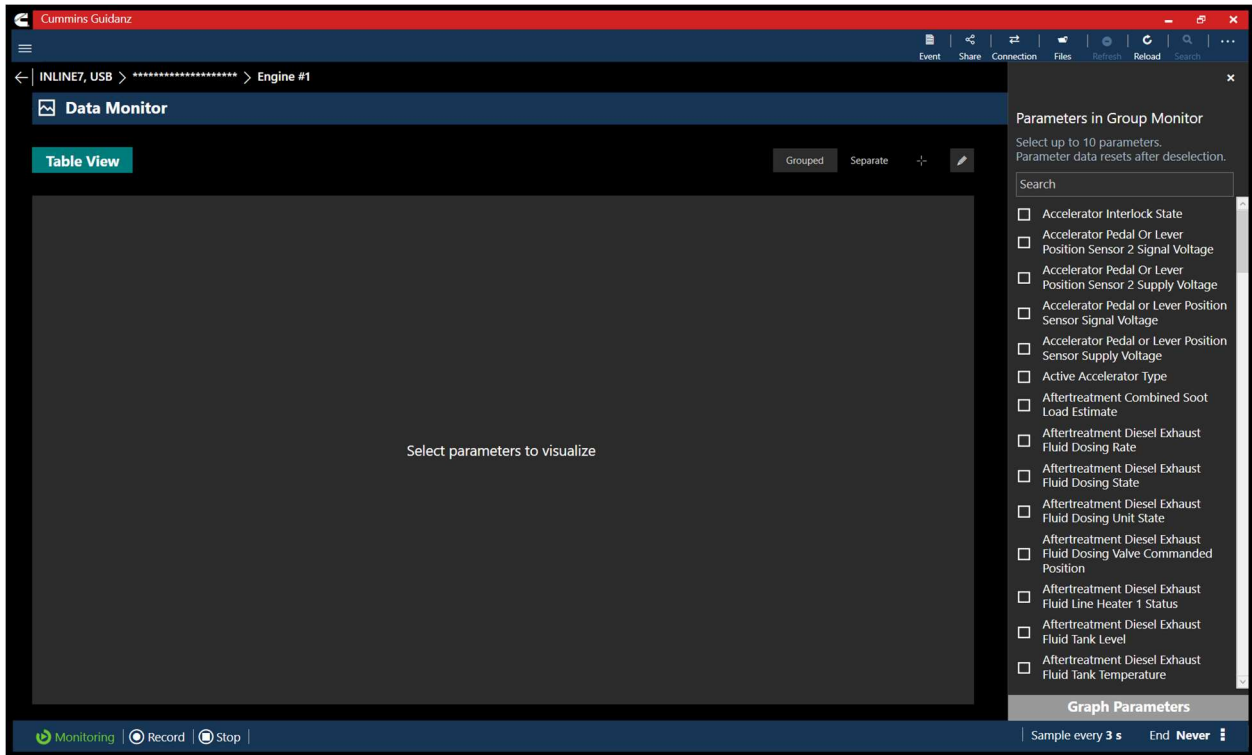


Figure 0-25 Graphical Monitoring parameter selection screen.

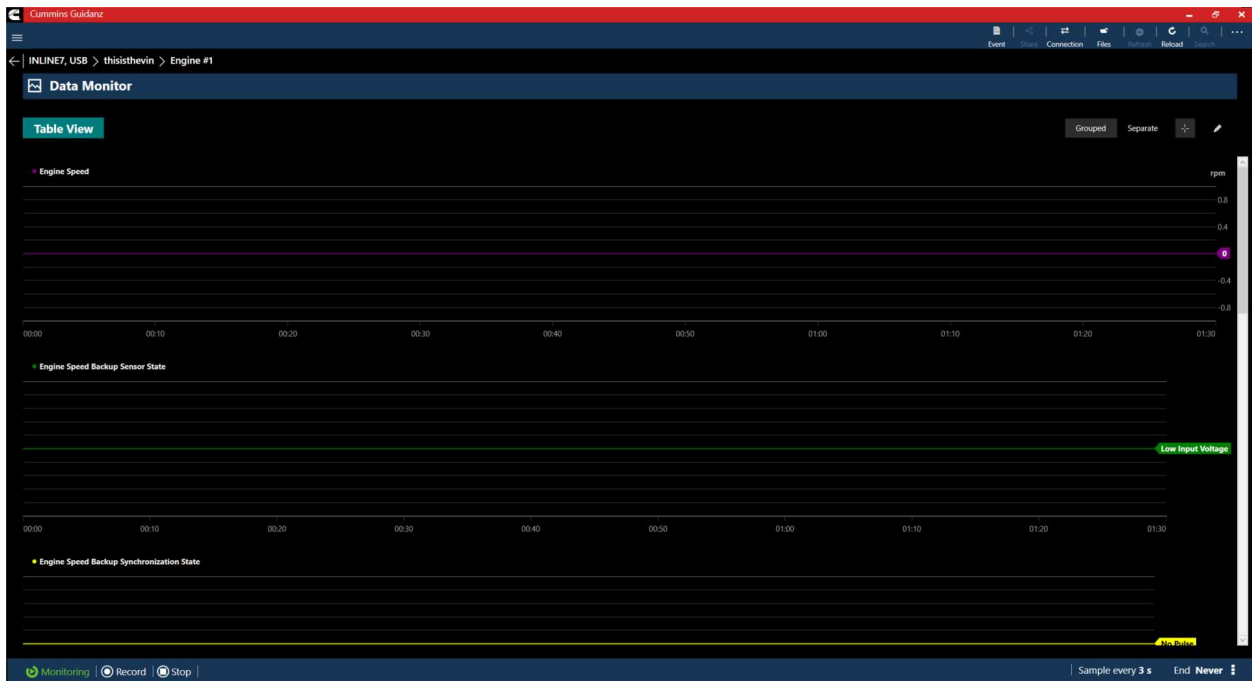


Figure 0-26 Graphical Monitoring Screen



## ENGINE SETTINGS

Clicking on Engine Settings on the ECM Device Dashboard the user is taken to the Engine Settings screen where the user can see the values of each parameter. User can view and edit System ID and Dataplate settings by clicking on System ID and Dataplate in the Engine Settings screen.

## ADJUSTING SETTINGS

User can search the Engine Settings parameter list. User can change parameter and sub-parameter values that are not locked by changing the value within the specified min and max values.

After user confirms the changes, user can save changes. Changes are written to ECM by going through Key Off/Key On process. At the end of the process, saved changes are confirmed. If you move away from the screen without saving, the changes will be discarded.

RSGR subscription users will see that Road Speed Governor Restricted parameters in Engine settings are locked and not adjustable.

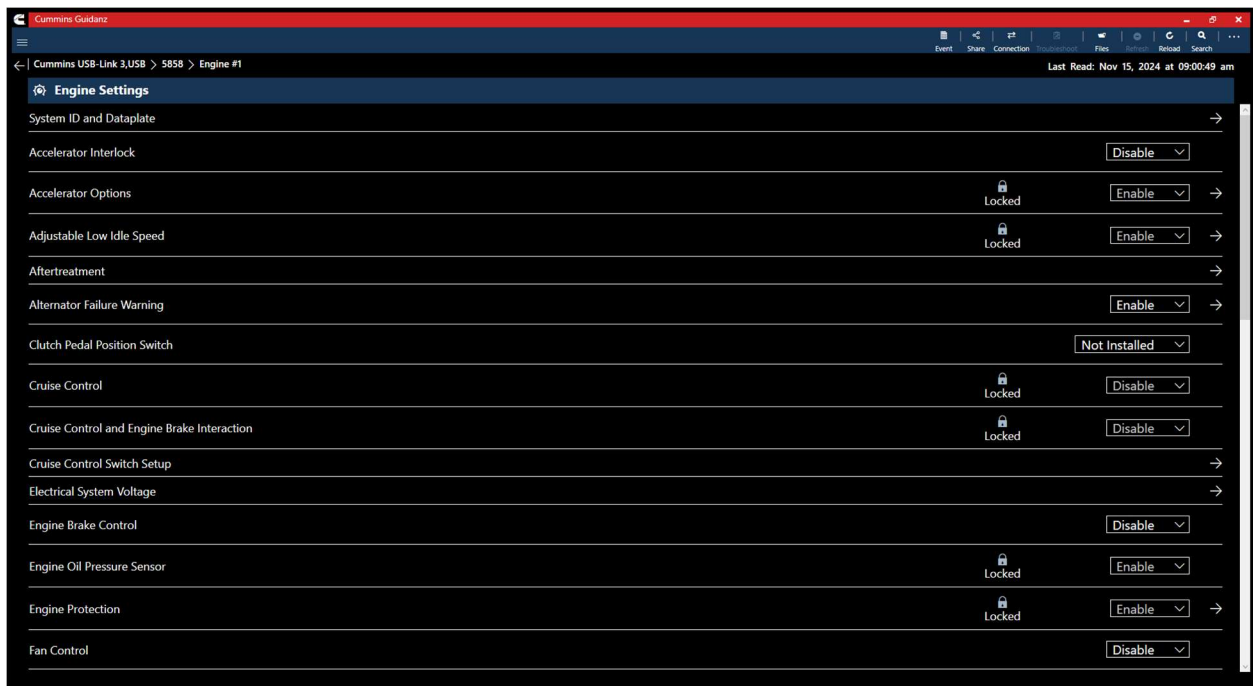


Figure 0-27 Engine Settings



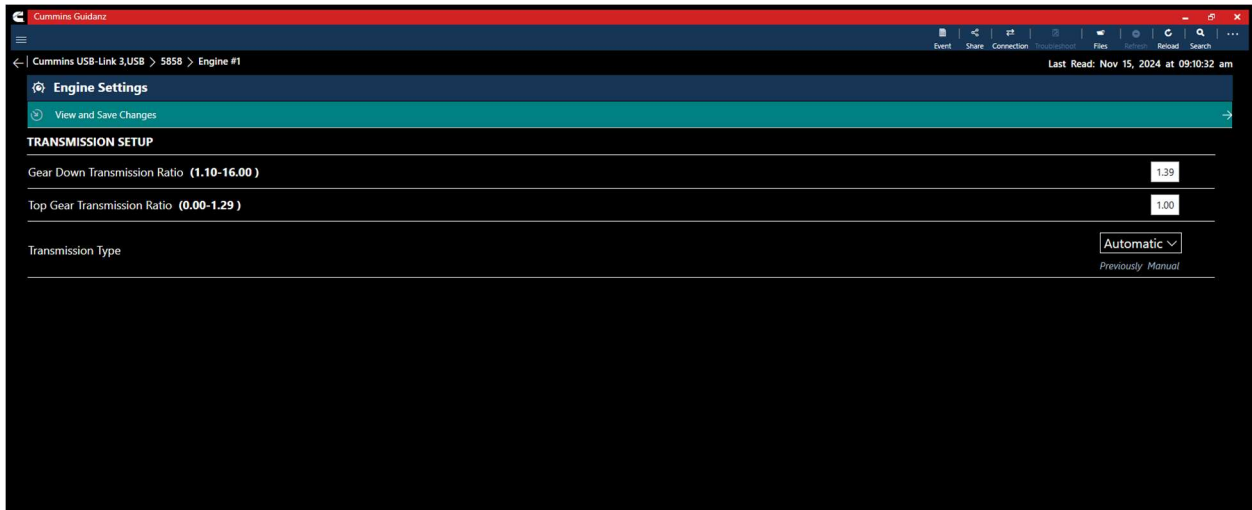


Figure 0-28 Engine Settings with Parameters changed

## CALIBRATE ENGINE

Clicking on Calibrate Engine will allow the user to update the Engine to the latest calibration revision if a newer revision is available.

## DOWNLOADING NEW REVISION

When Guidanz detects a new revision of the ECM calibration is available, users will be prompted to download the ECM Code.

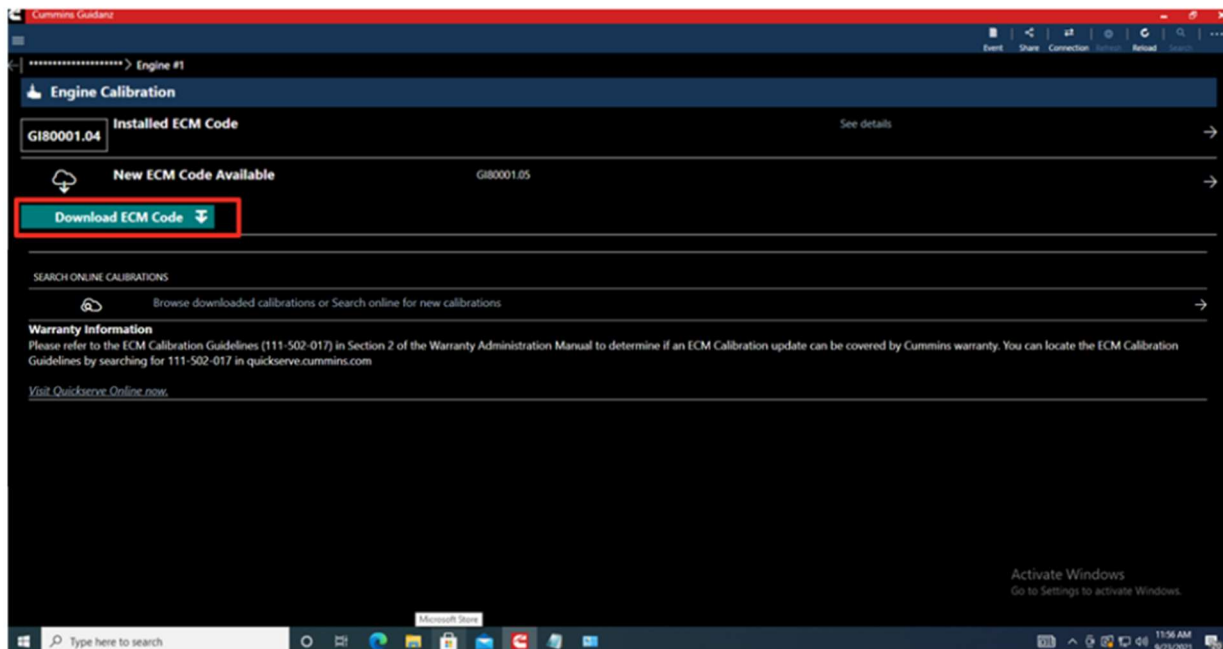


Figure 1-0-29 Engine calibration with new revision detected



## SEARCHING AND DOWNLOADING CALIBRATIONS

From the Engine calibration page (Figure 1-29) users can select the reveal arrow on the right side of the screen to browse previously downloaded calibrations, or to use the “Find Online” functionality to download calibrations to the user’s device.

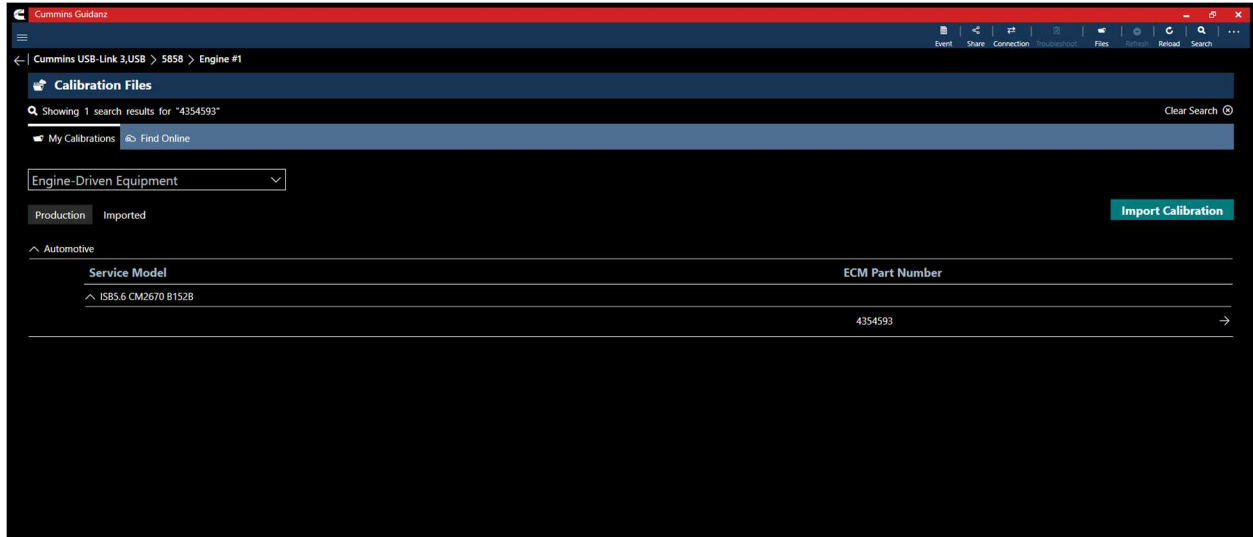


Figure 0-30 Calibration Workspace page

Expanding the drop down and selecting the reveal arrow on an ECM Part Number will allow the user to see all or downloaded production calibrations.

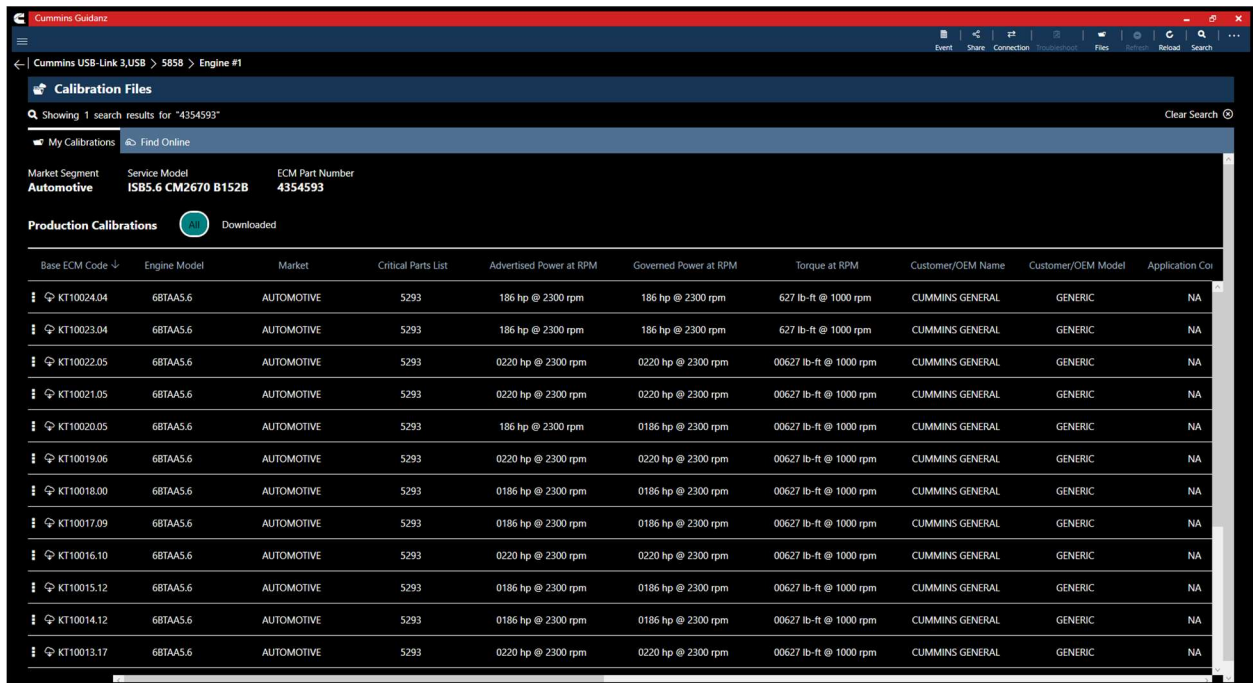


Figure 0-31 Calibration Revision Page 2



Selecting the “Find Online” from the previous screen allows users to search for a specific calibration. Please enter the calibration ID w/o the revision number and click the search.


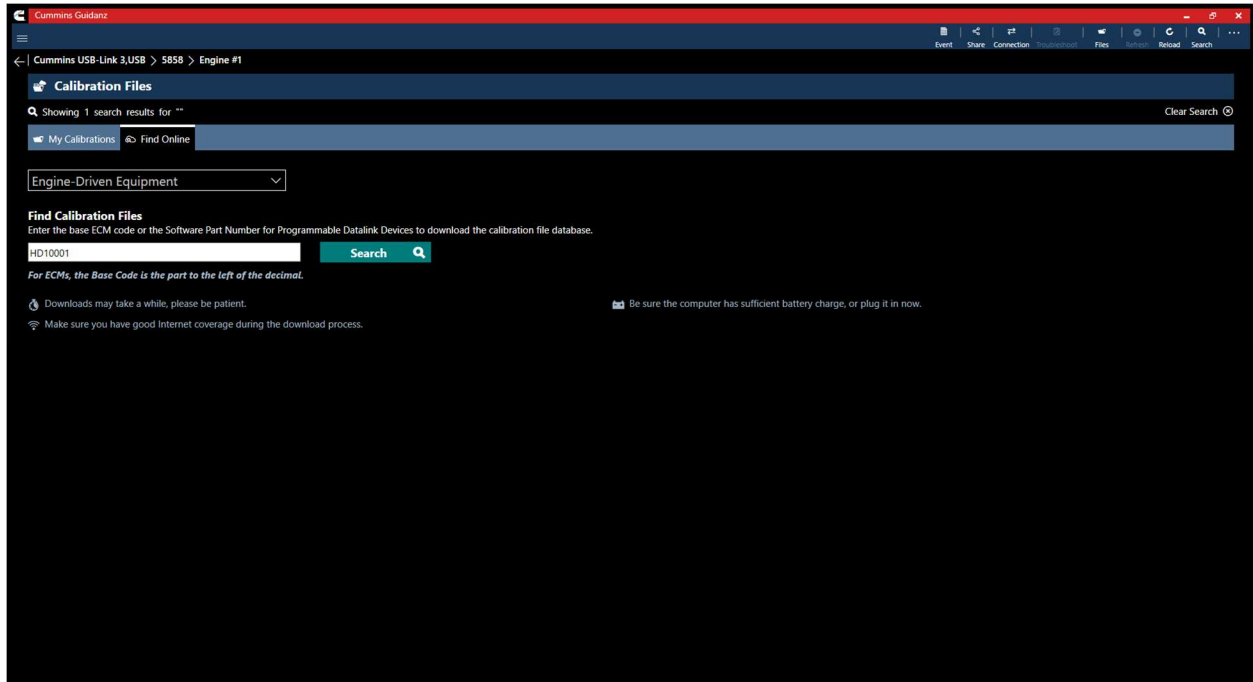


Figure 0-32 Calibration Download Page

If a calibration is found, users can download the calibration to their device and view the Revision History.


## IMPORTING CALIBRATIONS

Properly configured calibration packages can be imported into GTK by selection the Calibration Files option from the Home screen. On the Calibration Files page, selecting the Import Calibration button will open Windows file explorer, and allow the user to select the appropriate “zipped” esdn folder.

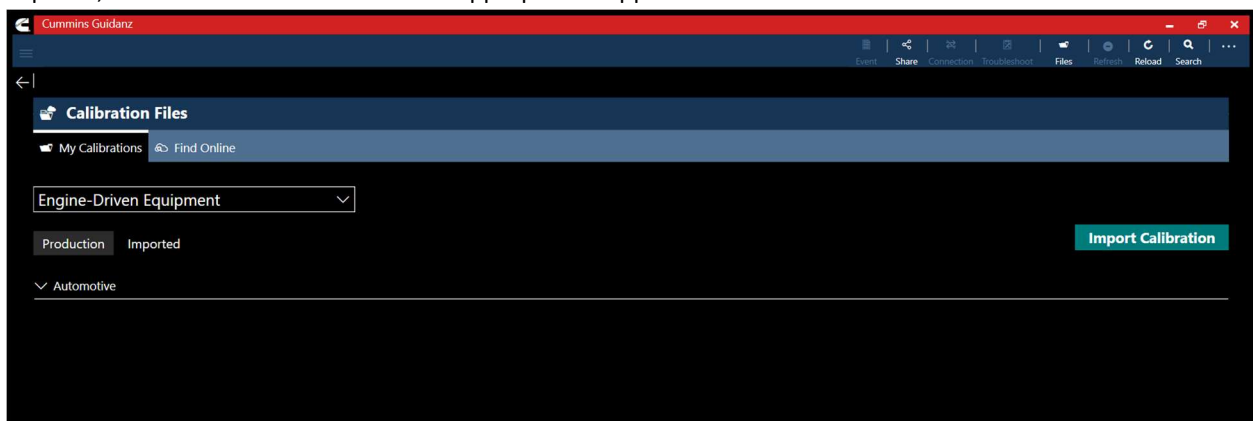



After selecting the esdn folder, users have the option to add notes to the package.

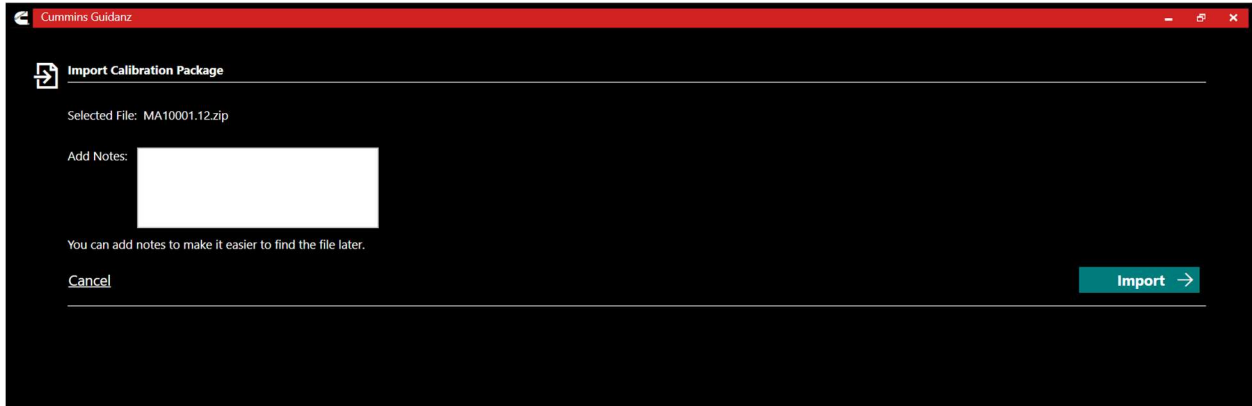

## CALIBRATION PROCESS

The calibration process is broken into 3 sections:

- Downloading the new calibration to the computer
- Transferring the new calibration to the ECM
- Restoring and closing the ECM after the transfer process

The process of transferring the new calibration to the ECM can take up to an hour and should only be performed when the vehicle has sufficient battery capacity. Failure to meet the standards can result in the vehicle becoming inoperable. At the beginning of the transfer process, users have the option to save and restore adjustable parameters to the ECM after the calibration process. It is highly recommended that users select this option when performing a calibration update.

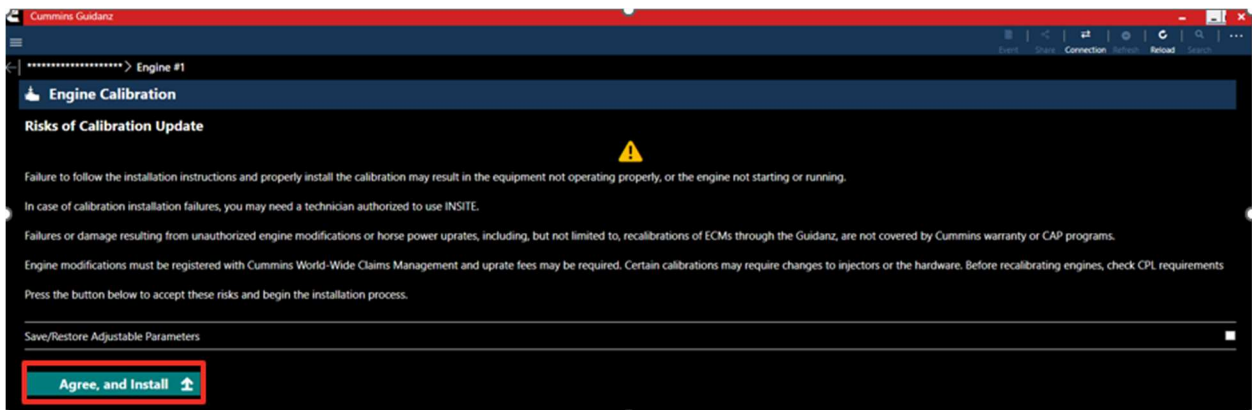


Figure 0-33 Transfer calibration to ECM step 1 with Save and Restore adjustable parameter checkbox unchecked

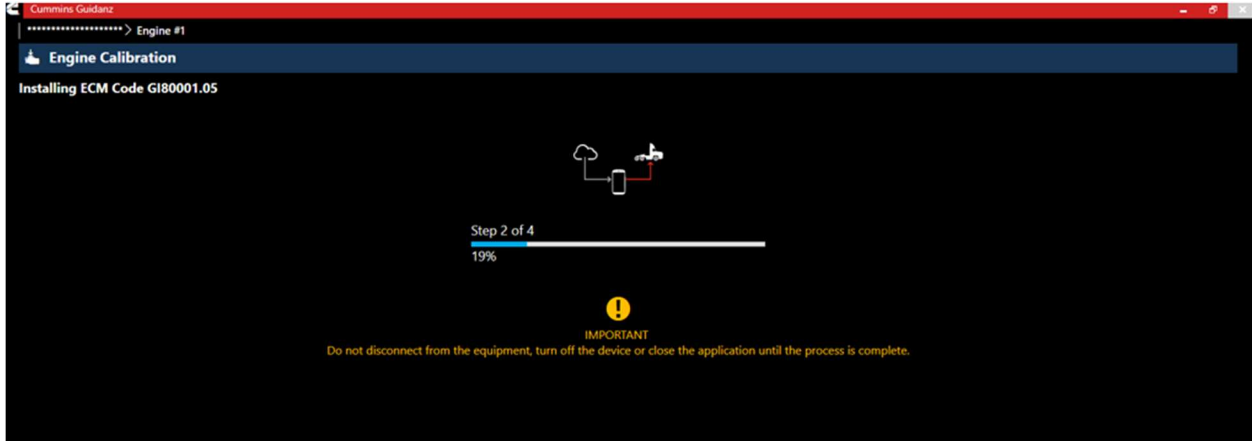


Figure 0-34 Transfer calibration to ECM step 2

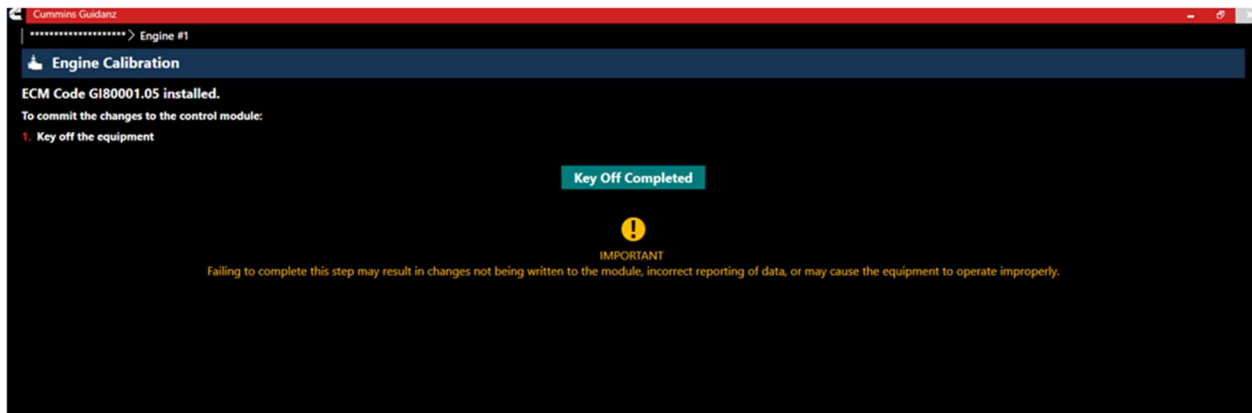


Figure 0-35 Restoring and completing the ECM calibration process

---

## CALIBRATION FAILURE (ROM-BOOT RECOVERY)

In the event of a calibration failure, Guidanz will allow the user to attempt to recover the calibration, on the next connection.

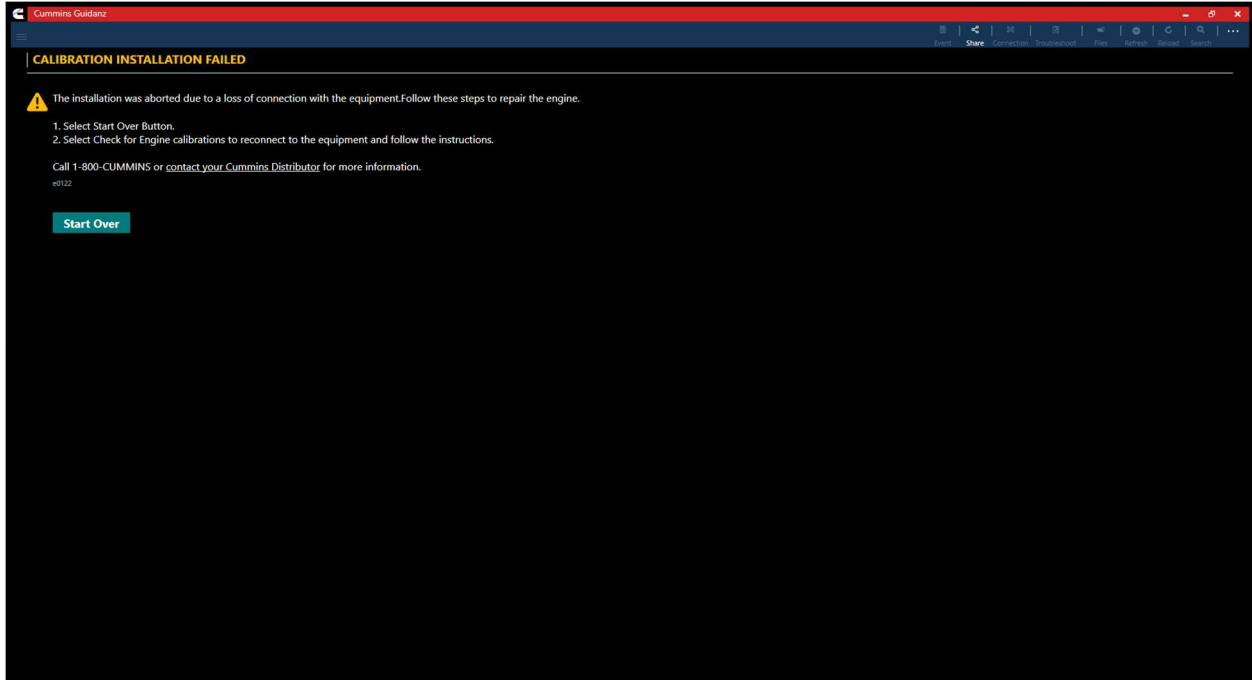


Figure 0-36 Calibration Failure Page

After clicking “Start Over” users are taken to the Home page. Initiating a new connection through the Analyze Equipment button will prompt the user to attempt to recover and calibrate the ECM. Selecting “Try Again” will begin the process.

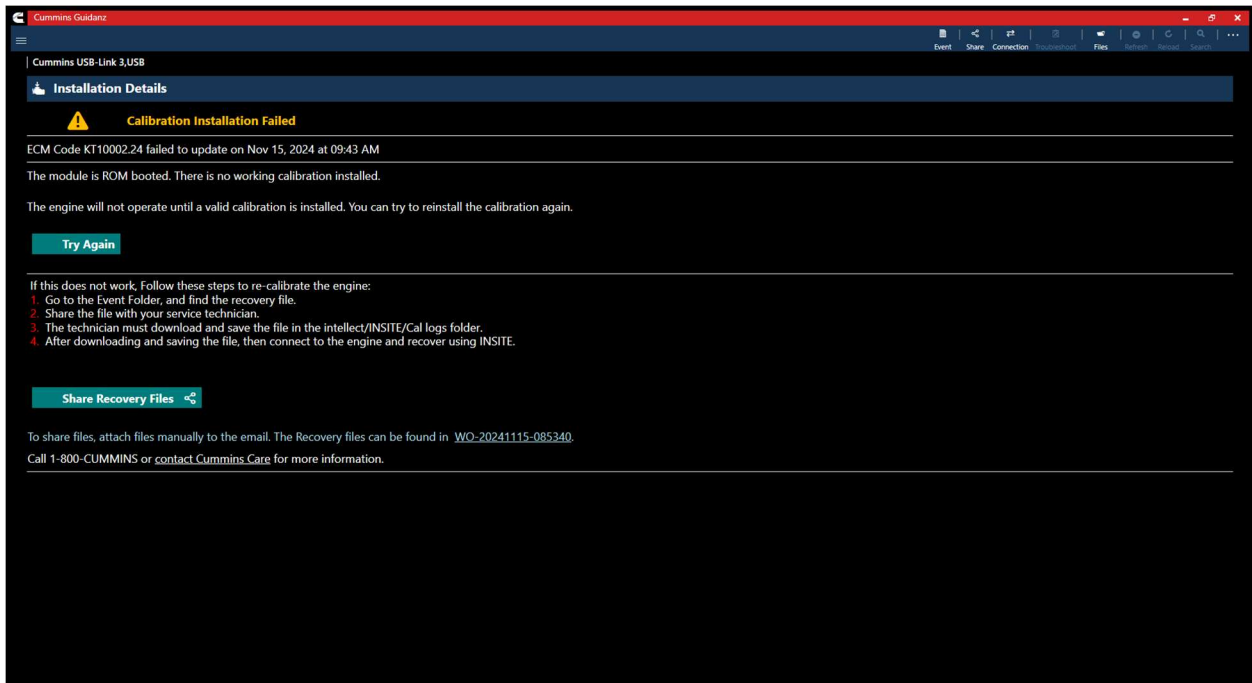


Figure 0-37 Calibration Recovery page



## DIAGNOSTIC TESTS

Clicking on Diagnostic Tests on the ECM Device Dashboard the user is taken to the Diagnostic Tests screen where the user can see all the diagnostic tests implemented in the Guidanz PC Application and supported by the calibration.



Figure 0-38 Diagnostic Test container page

## INSTRUCTIONS

Each individual Diagnostic Test includes its own set of instructions. Some tests require the engine to be running, others require just a Key-on. Please follow the instructions for the specific Diagnostic Test to ensure the test performs as expected.

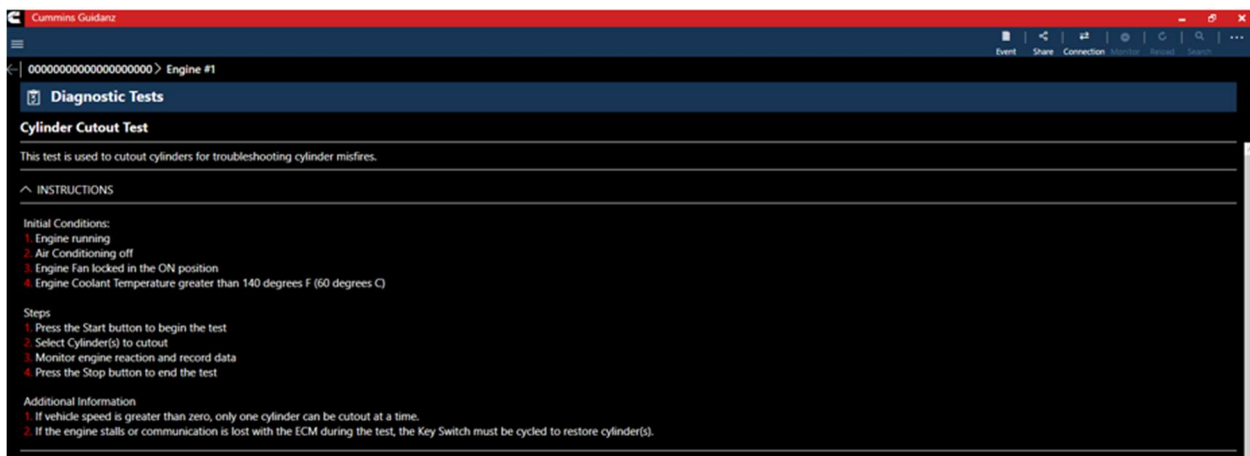


Figure 0-39 Diagnostic Test instructions



## STARTING/STOPPING

When all pre-conditions are met, the user can Start and Stop the test using the buttons located at the bottom left of the test.

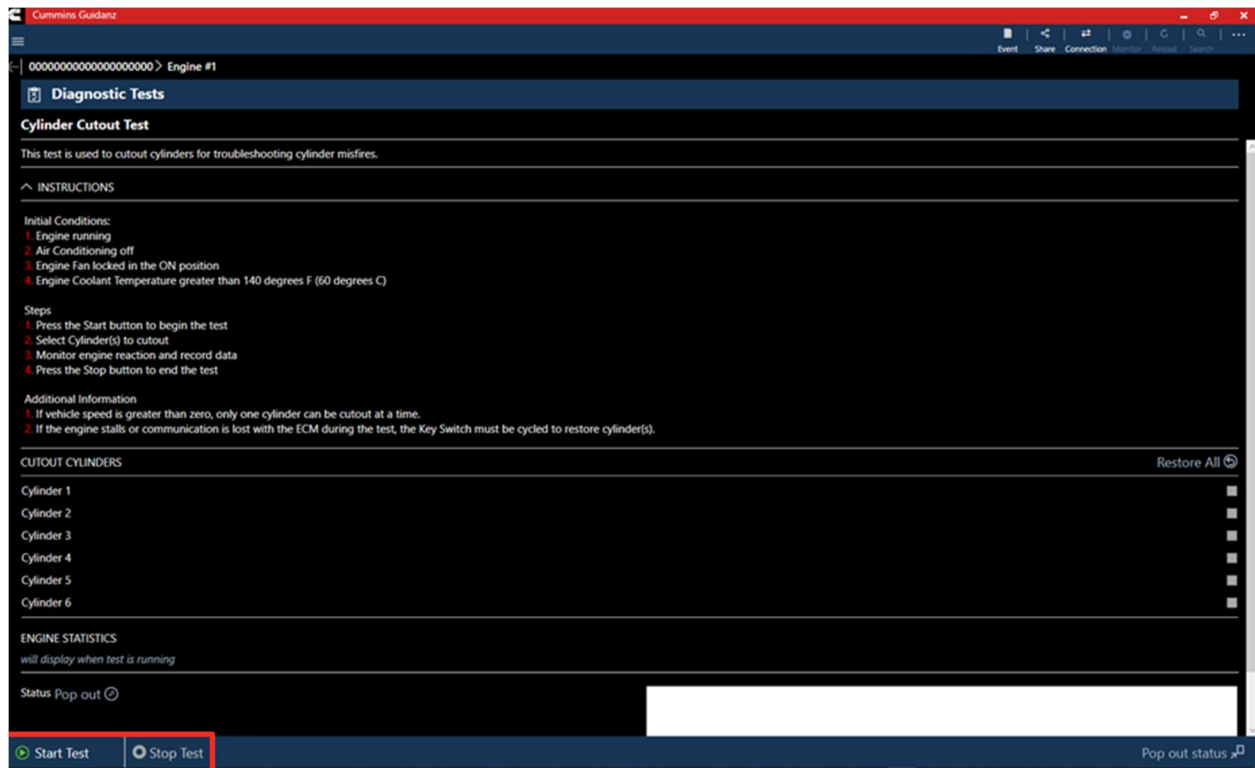


Figure 0-40 Diagnostic Test Start/Stop button

## RESULTS

Most Diagnostic Tests include a status box to display the status of the test being performed. For the user to better monitor the test progress during the diagnostic session, a user can pop out the Status box either by clicking on the pop out icon next to Status or on the Pop out status icon on the right-hand bottom of the screen.



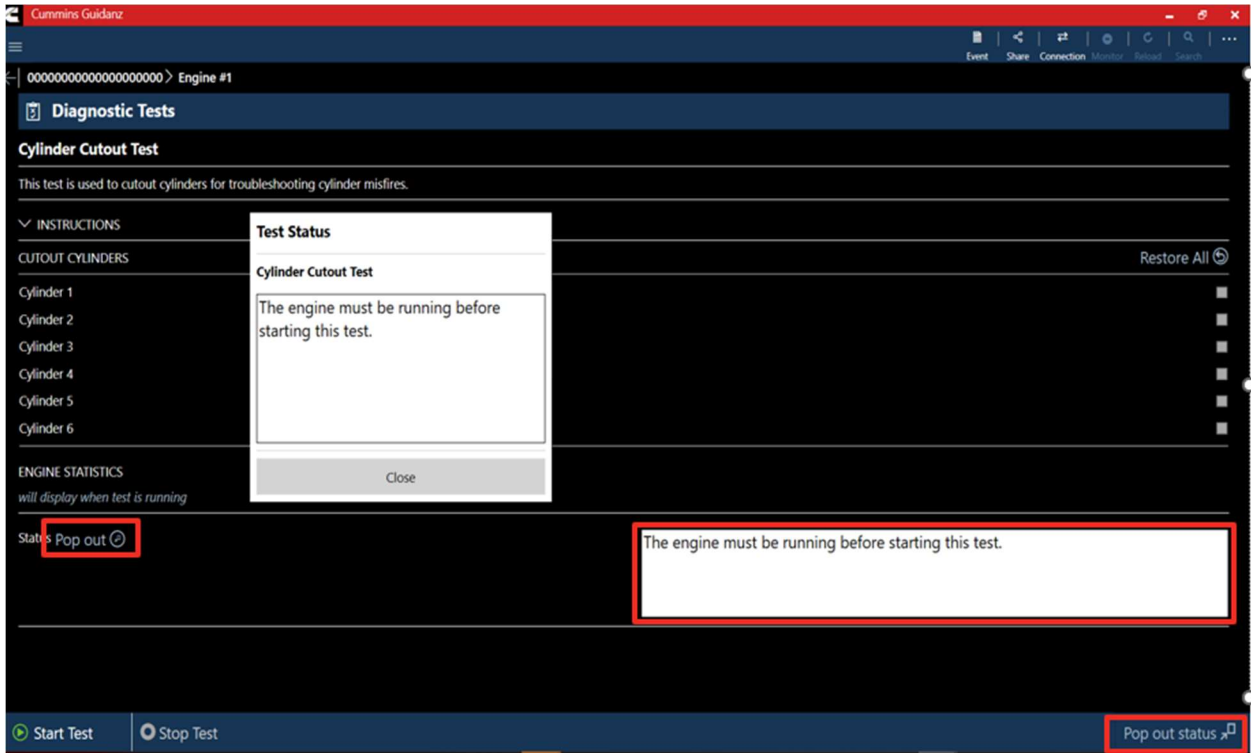


Figure 0-41 Diagnostic Test status messages

## ADVANCED FEATURES

Clicking on Advanced Features on the ECM Device Dashboard the user is taken to the Advanced Features screen where the user can see all the Advanced Features implemented in the Guidanz PC Application and supported by the calibration.





## INSTRUCTIONS

Each individual Advanced Feature includes its own set of instructions. The majority require the engine to be stopped. Please follow the instructions for the specific Feature to ensure expected functionality

The screenshot shows the 'Advanced Features' section in the Cummins Guidanz software. The 'Aftertreatment History' section is expanded, displaying a table with the following data:

Parameter	Value	Units
ECM Time(Key On Time)	000000:00:00	HH:MM:SS
ECM Real Time	000000:00:00	HH:MM:SS
Diesel Oxidation Catalyst Inlet Temperature	32.0	deg F
Diesel Oxidation Catalyst Outlet Temperature	32.0	deg F
Diesel Particulate Filter Outlet Temperature	32.0	deg F
Diesel Particulate Filter Differential Pressure	0.0	InHg
Diesel Particulate Filter Soot Load	Normal	

Below the table, there is a dropdown menu for 'Maximum Soot Load Condition' set to 'Normal'. The 'Regeneration History Log' section is collapsed.

## TRIP INFORMATION

Clicking Trip Information on the ECM Device Dashboard the user is taken to the Trip Information screen. The trip information screen gives details such as Fuel used, Distance travelled, and engine running hours.

The screenshot shows the 'Trip Information' screen in the Cummins Guidanz software. The screen displays a dropdown menu for 'All Trips (Cumulative)' and a 'Reset' button. Below the dropdown, there are several expandable sections for trip details:

- Aftertreatment
- Distance
- Fuel Used
- Multiple PTO
- Other
- Time

## TRIP INFORMATION RESET


When required or requested, the Trip Information can be reset to default by selecting the "Reset" button.



Figure 0-42 Trip Information Reset

## IMAGES & TEMPLATES

Clicking on Images & Templates on the ECM Device Dashboard the user is taken to the Images and Templates screen where the user can manage available Images or Templates. Clicking on Images shows all captured images for the connected ESN. User can also search the Images or change the Sort order.

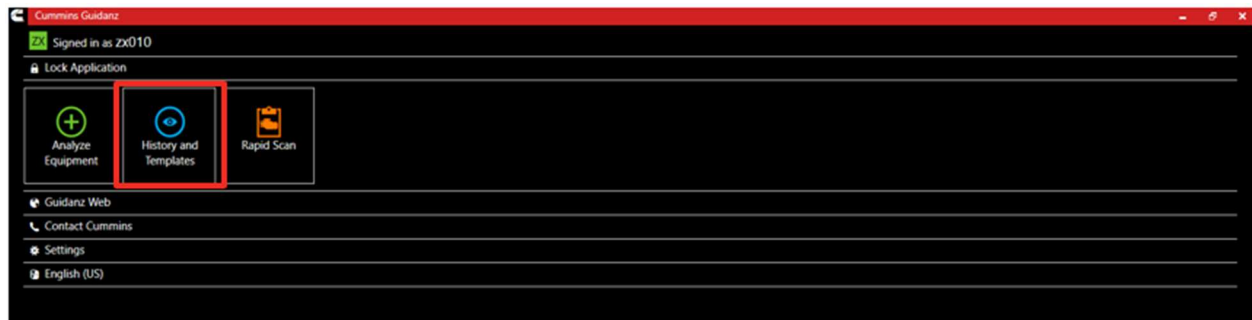

## IMAGES

Clicking on the three dots on the left-hand side of the ECM image allows the user to Convert to Template, Share EIF File, and Delete File. Clicking on an image row allows the user to connect to the ECM image. If the user is currently connected to an Engine, they will be disconnected to connect to the ECM Image.


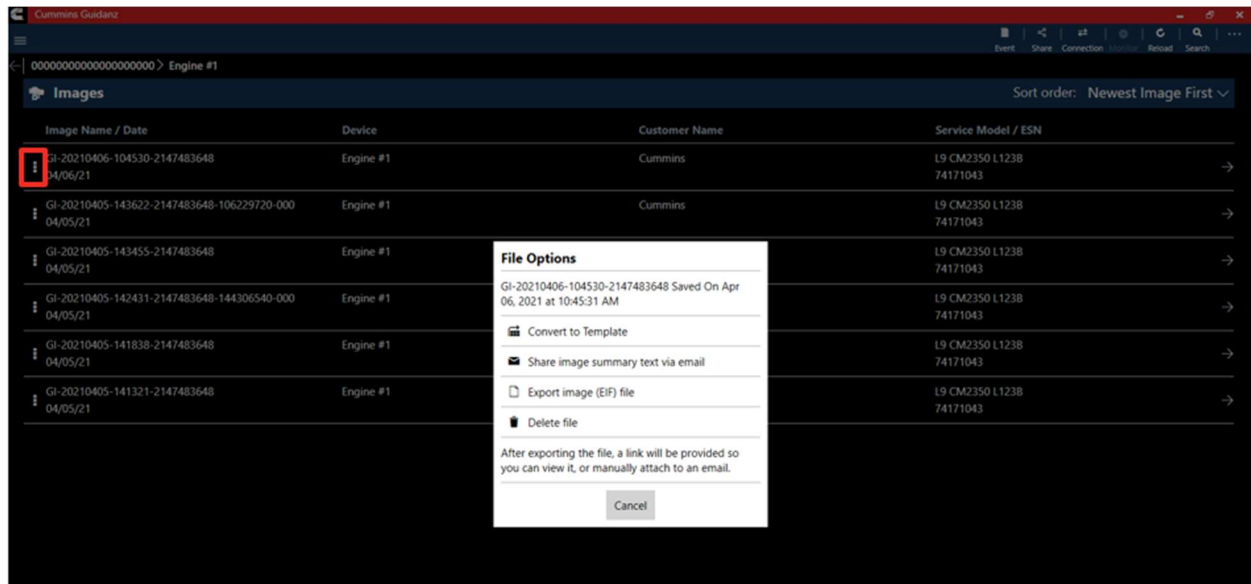


Figure 0-43 ECM Image screen

## SEARCHING

Users can also search for specific ECM images from the toolbar.

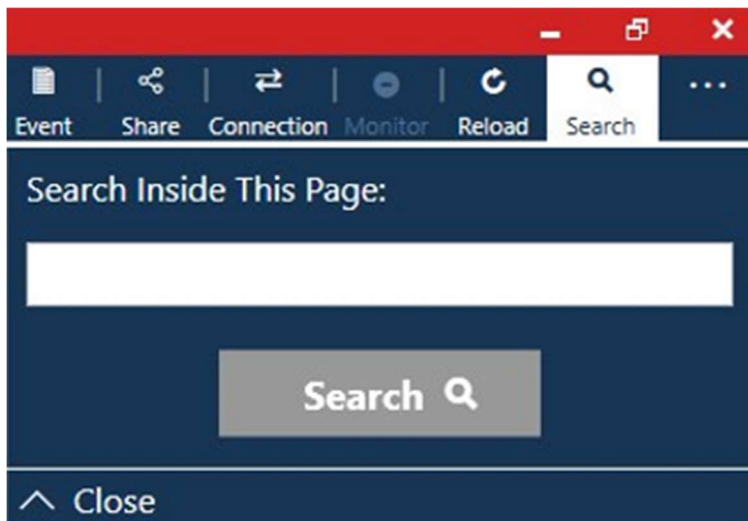

## SHARING

### CONVERTING TO TEMPLATE

When user selects to convert image to template, user can change template name and enter template notes

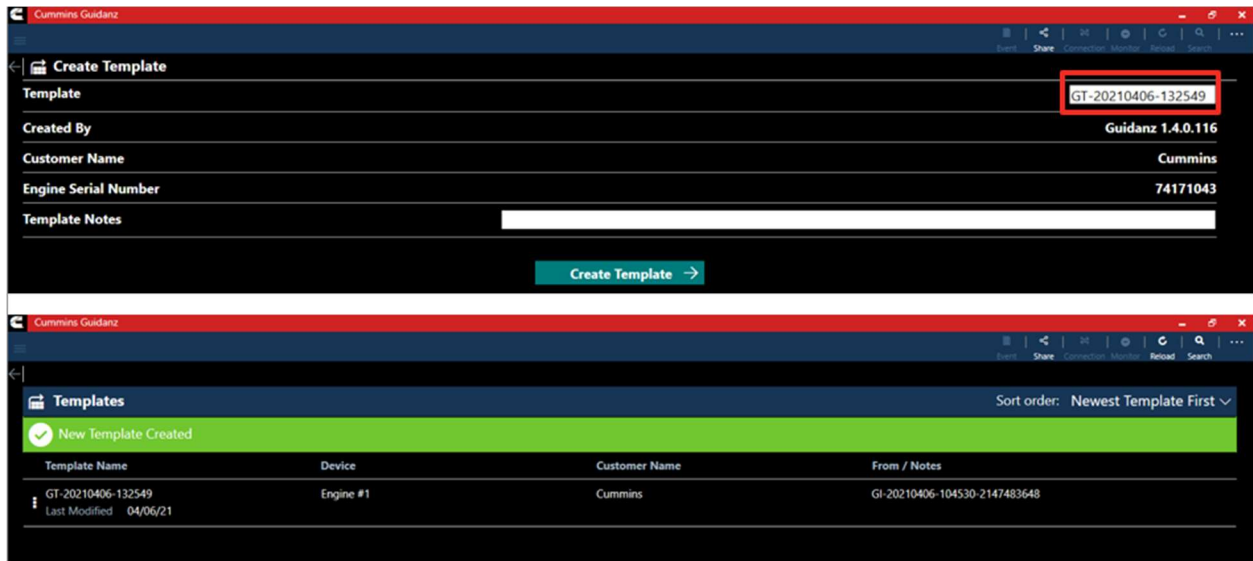


Figure 0-44 ECM Image Conversion to Template

## EXPORTING

Users can export Image files in EIF format to share with other Guidanz Diagnostic Toolkit (PC or Mobile Application) or Insite users. After successfully exporting the image, users will be given a link to the location to quickly find and share through email.



## IMPORTING

Importing EIF files can be done through your PC's Windows Explorer. Users that have Insite already installed will need to associate the .EIF file type with Guidanz for simple double click import. Guidanz will give you the opportunity to change the ECM image name and add technician notes before completing the import.

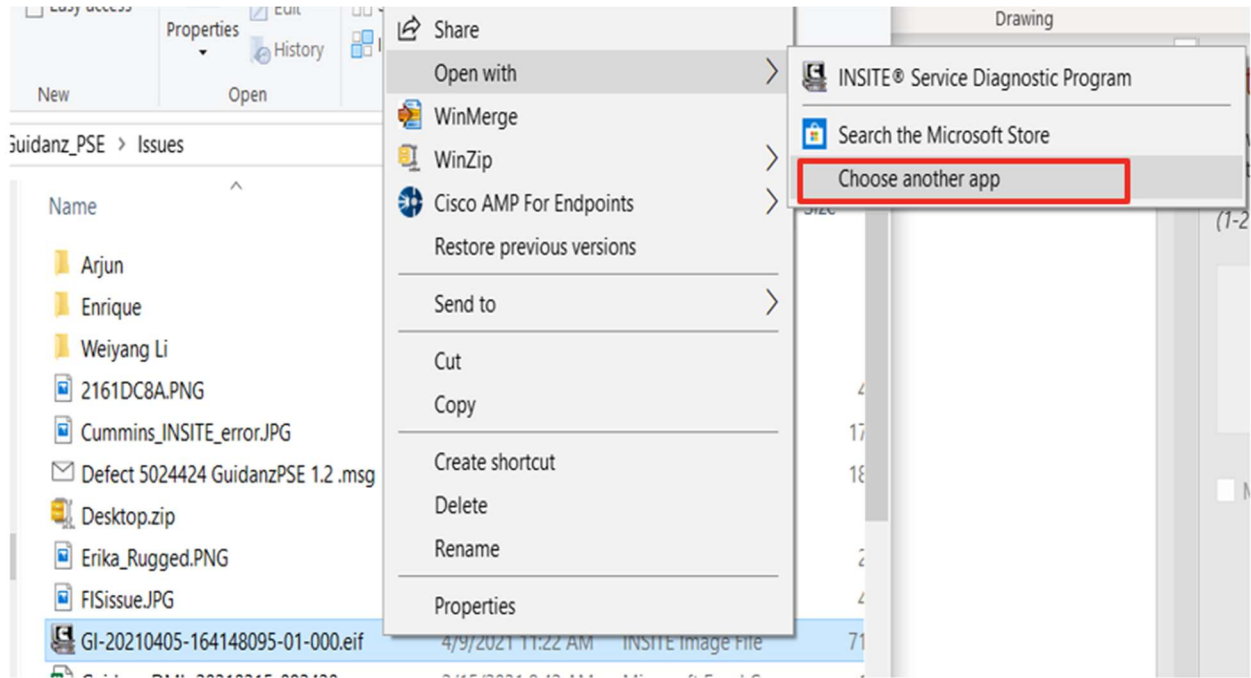


Figure 0-45 Selecting and Right clicking the .EIF file

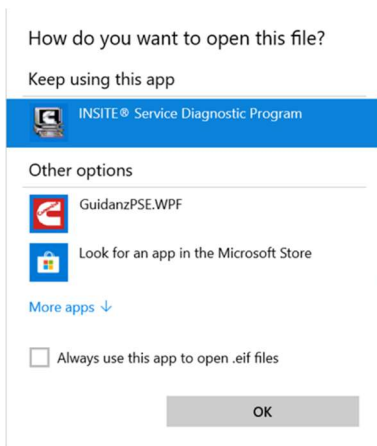


Figure 0-46 Selecting Guidanz for users that have INSITE installed

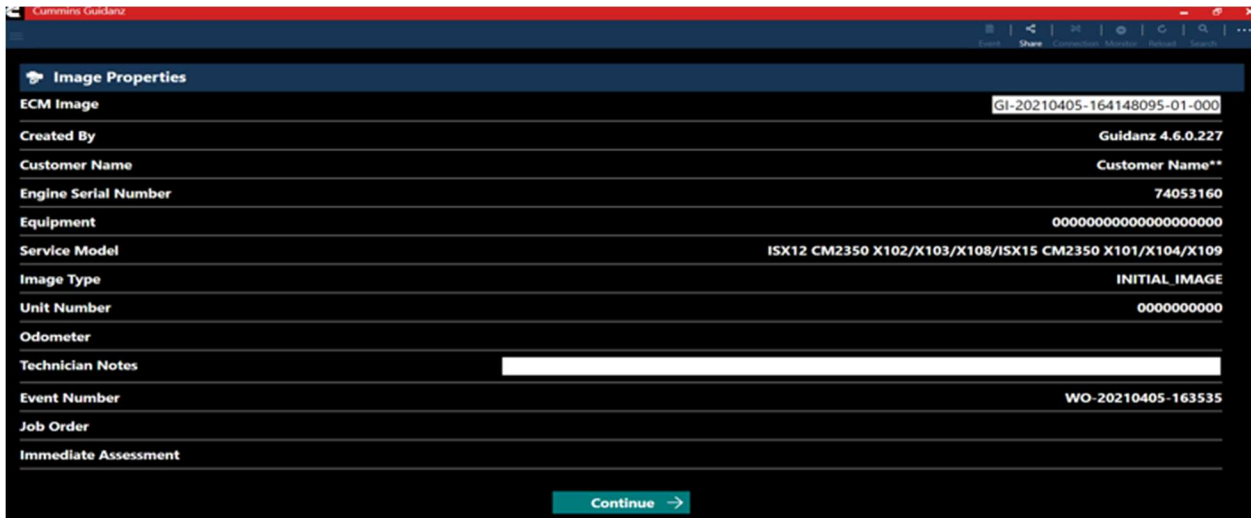


Figure 0-47 ECM Image import

## TEMPLATES

When user selects to convert image to template, user can change template name and enter template notes.

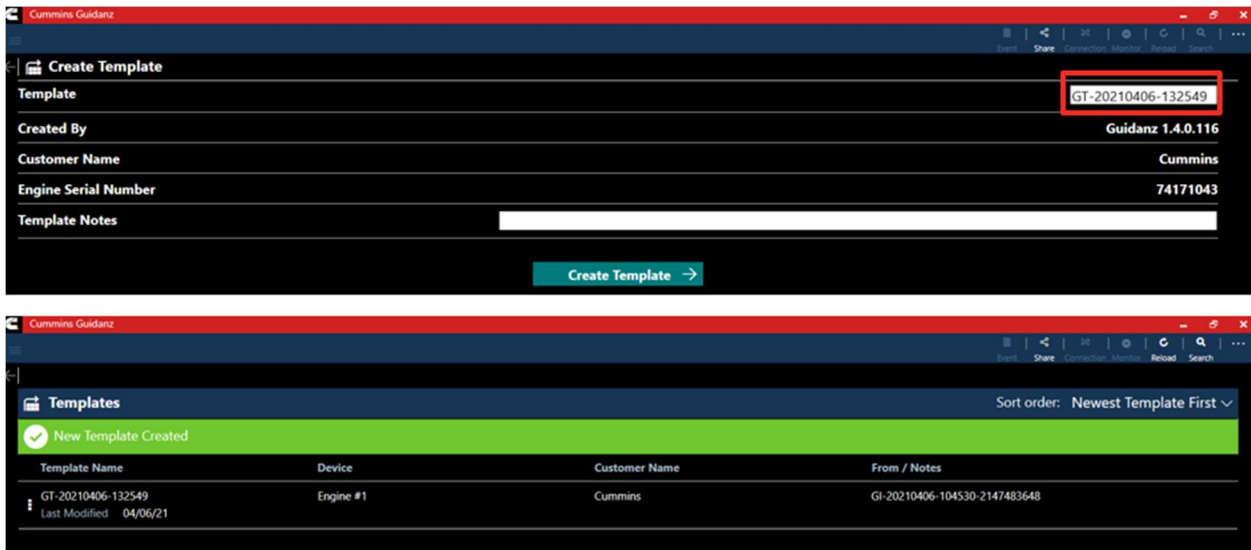


Figure 0-48 Template creation

## WRITING TEMPLATE TO ECM

Templates can be written to an ECM to quickly change multiple device settings to a predetermined value. Selecting the Write to ECM icon from the Template page will begin the process.



Figure 0-49 Write to ECM icon on right side of screen

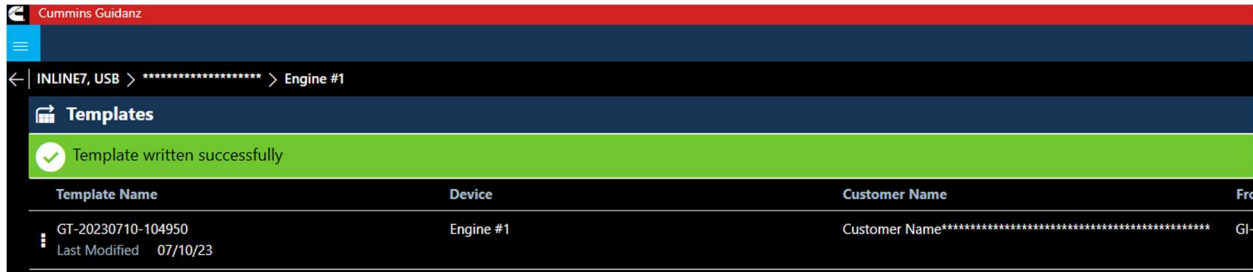


Figure 0-50 Successful Template Write

## AUDIT TRAIL

Clicking on Audit Trail on the ECM Device Dashboard the user is taken to the Audit Trail screen where the user can see the audit trail of the connected ECM. Clicking on one of the Audit Trail records will give detailed information on the tool used and the changes made to the connected ECM.

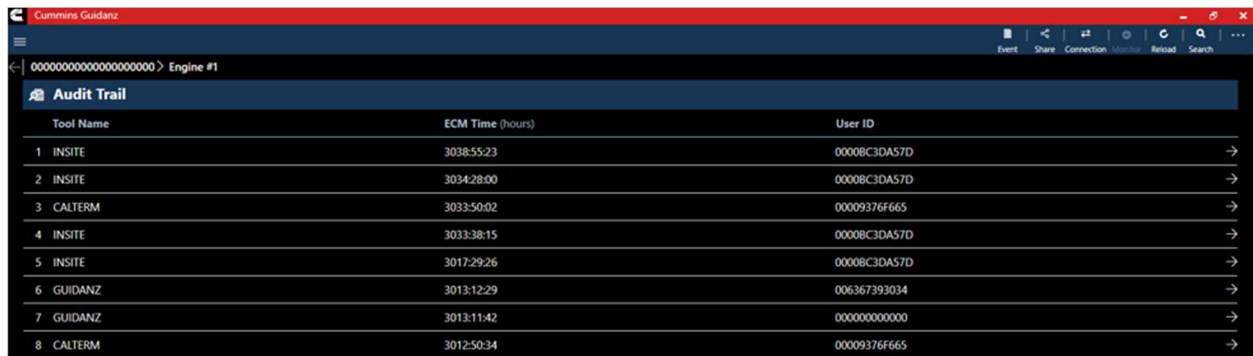


Figure 0-51 Audit Trail Screen





Audit Trail: Record #1	
Tool Name	INSITE
Tool Version	8.7.1.93
User ID	0000BC3DA57D
ECM Time (Key On Time)	3038:55:23
ECM Real Time	Not Set
CHANGES PERFORMED	
22	Multi-Level ECM Security
31	Vehicle Anti-Theft Protection
53	ECM Password Removal Tool Used

Figure 0-52 Individual Audit Trail record

## IMMEDIATE ASSESSMENT SUBSCRIPTION

### SUBSCRIPTION FUNCTIONALITY

Immediate Assessment subscriptions allow users the below functionality.

- Prioritized Cummins fault codes, descriptions, and the top three most likely root causes
- Estimated service times
- Ability to update Guidanz Service Event Management Appointments
- Enter ESN and customer information
- Select manufacturer and model
- Equipment and device data plate information
- Create, View, Resume, Delete Events
- Create a Guidanz Service Event Management Job
- J1939 Device Fault
- Campaign Calibration installation capability
- "Scan Fault" which is a focused function that can be used to just read the faults from the engine without any fault prioritization.
- The ability to share any information in the app via email

### NEW ASSESSMENT

When clicking on New Assessment, user connects to the truck via the Data link Adapter. The Guidanz pulls up Engine Serial Number, and Customer Name from ECM, and the user can edit them if they are incorrect. Based on the confirmed ESN, the equipment make and model list is retrieved from the server. Guidanz pre-selects the data received from warranty data on the server and from the ECM if available, but the user must confirm the selection. If there is no manufacturer list, it can be caused by:

- No data based on the ESN provided
- No Internet
- Server issue

### INTAKE



During the Intake process, the application will connect to the selected Datalink adapter and pull the vehicle, engine serial number and Customer Name. Users can edit and change this information if they are incorrect. If the user selects other, they will be prompted to select an accessibility code. Note that the results of FC estimated repair times are more accurate with the correct make/model than with the accessibility code.

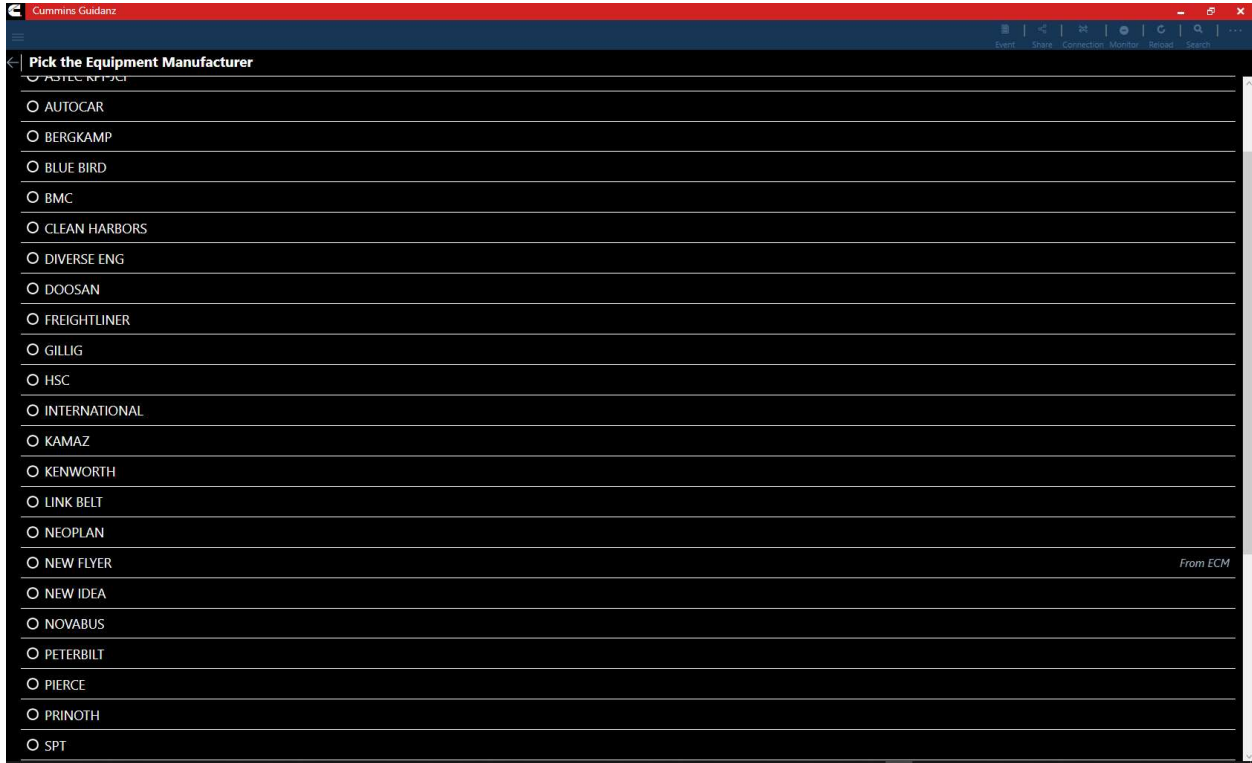


Figure 0-53 Make Screen

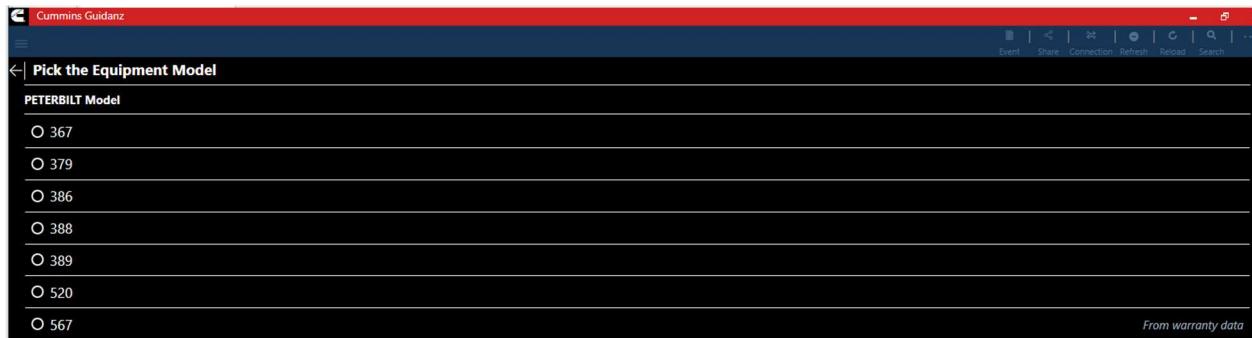


Figure 0-54 Model Screen

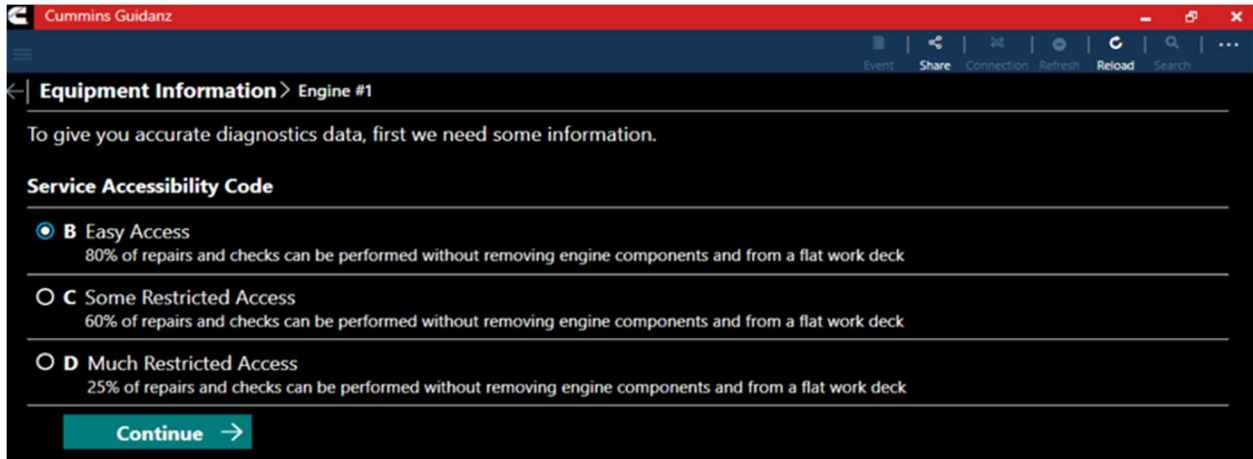


Figure 0-55 Accessibility code selection

## SEVERITY CODES

On the faults and Analysis screen the app will displays the overall severity code of the engine.

Each severity is displayed with a specific strip color and icon.

Severity	Icon	Strip color	Message
Stop Now	Stop Now	Red	Stop Now
Service Now	Service Now	Amber	Service Now
Service Soon	Service Soon	Yellow	Service Soon
Information	Information	Bright Blue	Information

## PRIORITIZED FAULTS

Primary Faults are critical faults that should be repaired first. Resolving the primary faults will many times also resolve secondary faults.

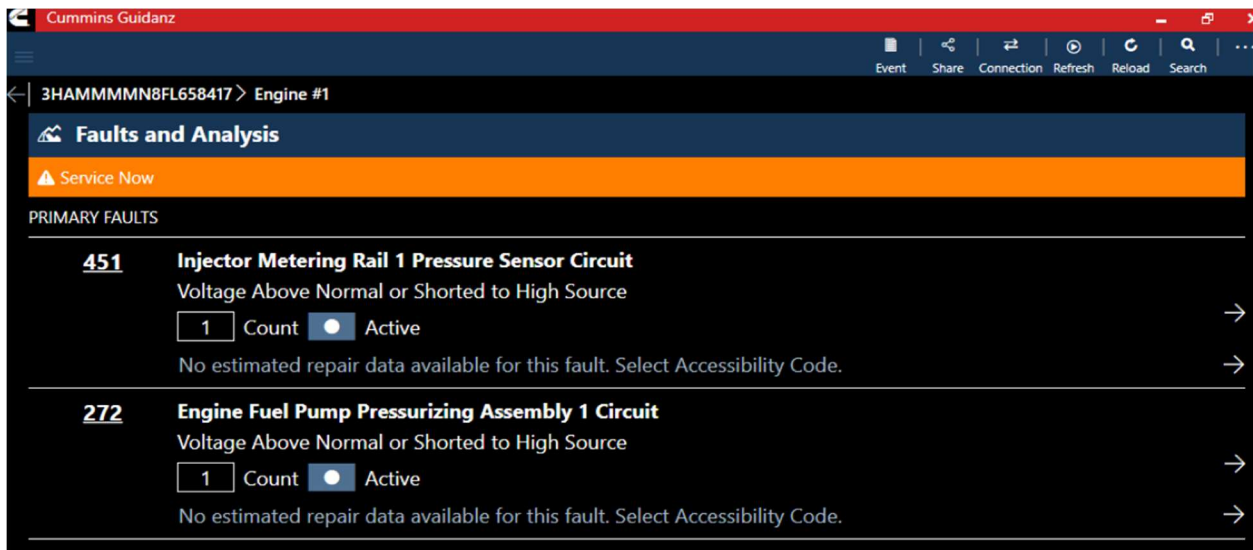


Figure 0-56 Primary prioritized faults and overall engine severity code



## ESTIMATED SERVICE TIMES

After the assessment is completed, users will be given estimated service times based on historical data. Note that this information will only be shown if the fault code supports the estimated service time.

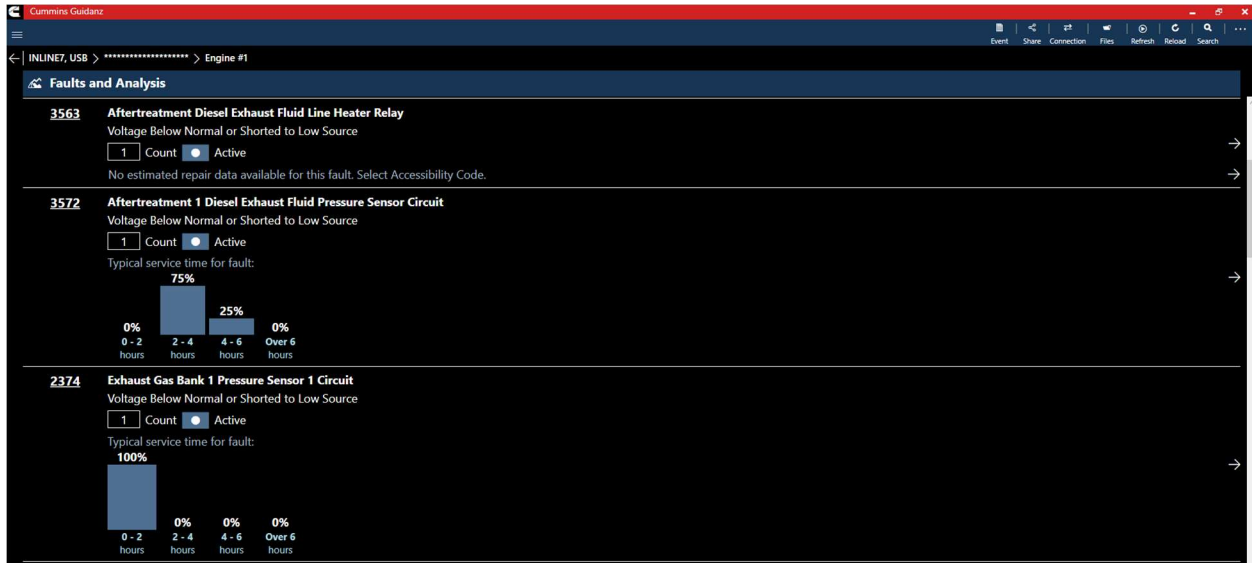


Figure 0-57 Estimated service times

## CREATING A SERVICE REQUEST FROM IMMEDIATE ASSESSMENT

After performing the Immediate Assessment on a new engine, users can create a Guidanz Service Event Management's Service request directly from the application.



Figure 0-58 Create Service Request from Immediate Assessment

## CREATE GUIDANZ SERVICE EVENT MANAGEMENT'S SERVICE REQUEST



## PENDING SERVICE REQUESTS

Users can create an Immediate Assessment from a pending service request. Pending service requests are created in Guidanz Service Event Management.


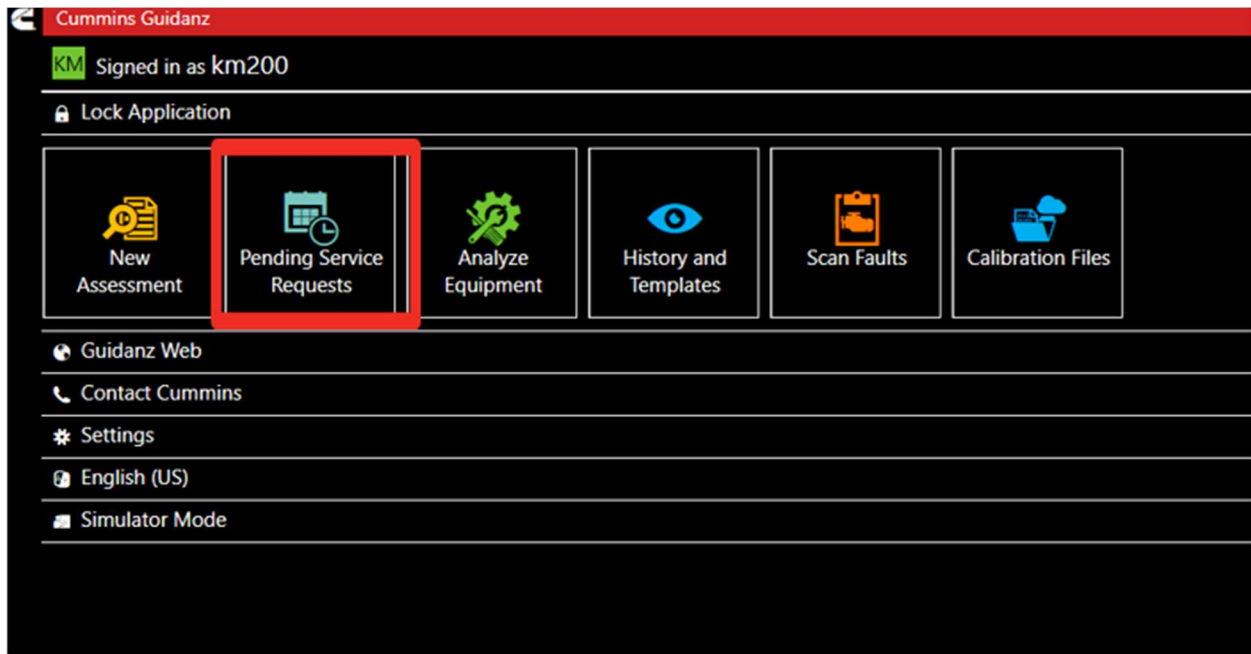


Figure 0-59 Pending Service Request Icon

## SCHEDULE PAGE

Users enabled in Guidanz Service Event Management will be able to see appointment from “yesterday, today, and tomorrow” in the app.



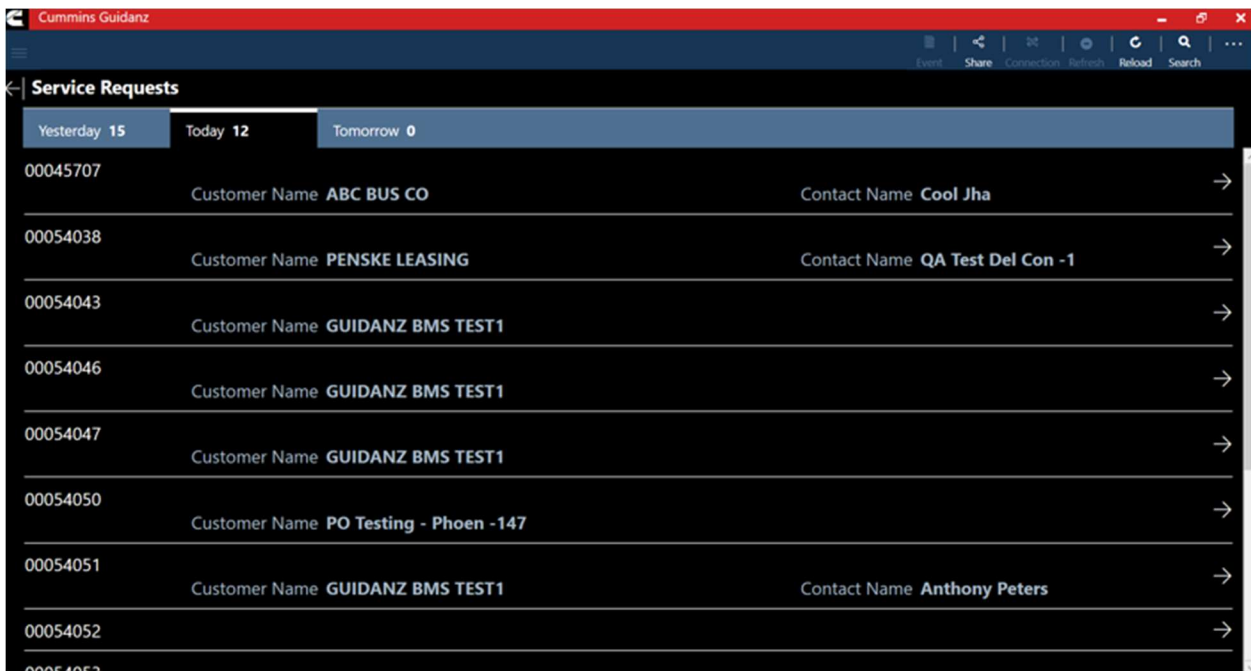

## PERFORMING IMMEDIATE ASSESSMENT FROM A PENDING SERVICE REQUEST

After selecting the correct appointment, users are given the option to perform the Immediate Assessment directly from the appointment screen. Please see [Intake](#) for complete instructions to perform the immediate assessment.

## GUEST/ REGISTERED USER

### ADAPTER CONNECTION

When Analyze Equipment, or Scan Faults is selected, the tool will offer a list of supported adapters to connect to the ECM

The page is broken into two sections USB adapters & Paired Bluetooth adapters. If a previously paired Bluetooth adapter is nearby, it will show as available.

Users can Select the adapter they are currently using to continue the connection.

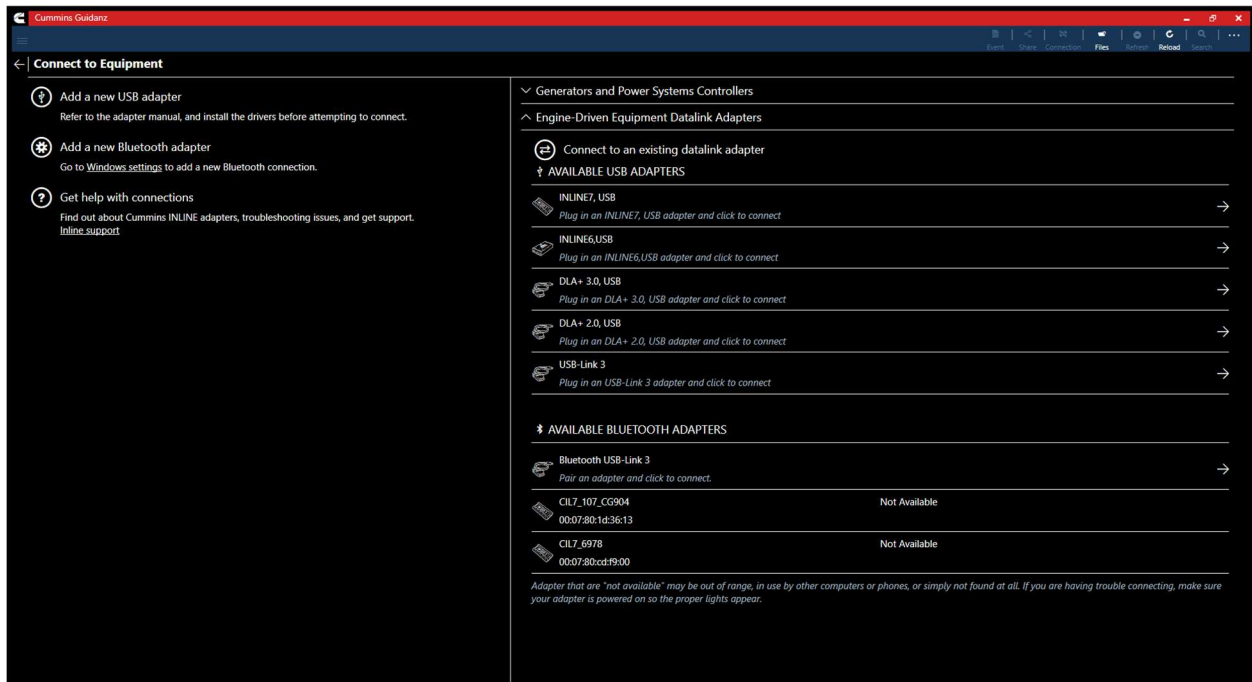


Figure 0-60 Adapter Connection Screen

### INTAKE

During the Intake process, the application will connect to the selected Datalink adapter and pull the vehicle, engine serial number and Customer Name. Users can edit and change this information if they are incorrect.

The intake page also offers the ability to automatically create an ECM image during intake if desired. The default behavior of the “Create ECM Image” checkbox is controlled on the [Settings](#) Page.



Cummins Guidanz

### Engine and Customer Information

To give you accurate diagnostics data, first we need some information.

Customer Name:

Engine Serial Number:

Complaint or Other Notes:

Create ECM Image

[Continue](#)

Figure 0-61 Engine serial number pulled from ECM. Users can edit.

Based on the confirmed ESN, the equipment make and model list is retrieved from the server. The application pre-selects the data received from warranty data on the server and from the ECM if available. The user will still need to confirm these selections.

If there is no manufacturer list, it can be caused by:

- No data based on the ESN provided
- No Internet
- Server maintenance or downtime

Cummins Guidanz

### Pick the Equipment Manufacturer

- AUTOCAR
- BERGKAMP
- BLUE BIRD
- BMC
- CLEAN HARBORS
- DIVERSE ENG
- DOOSAN
- FREIGHTLINER
- GILLIG
- HSC
- INTERNATIONAL
- KAMAZ
- KENWORTH
- LINK BELT
- NEOPLAN
- NEW FLYER
- NEW IDEA
- NOVABUS
- PETERBILT
- PIERCE
- PRINOTH
- SPT

From ECM

Figure 0-62 Make screen

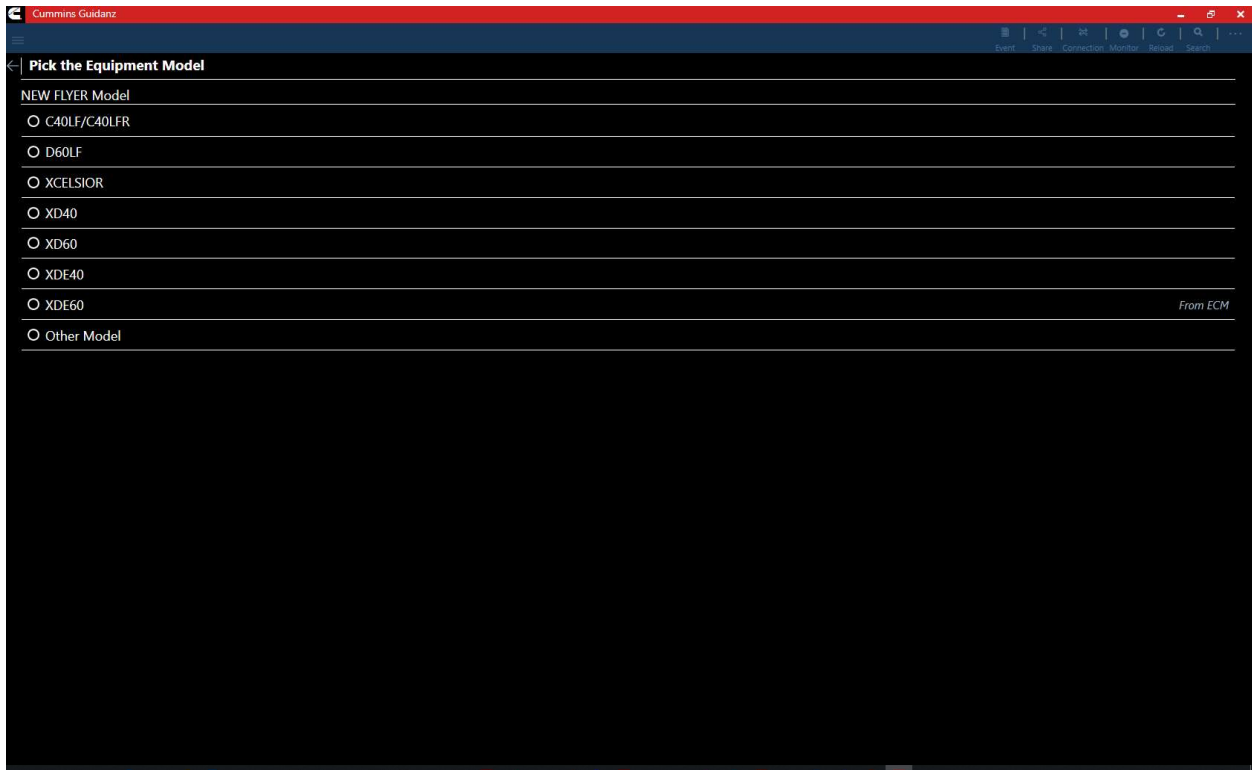


Figure 0-63 Model Screen

## EQUIPMENT DATAPLATE

The Equipment Dataplate can be accessed via the Equipment Summary Screen and Engine Dataplate. It contains the information the user enters such as customer name, manufacturer, model, and well as other information.

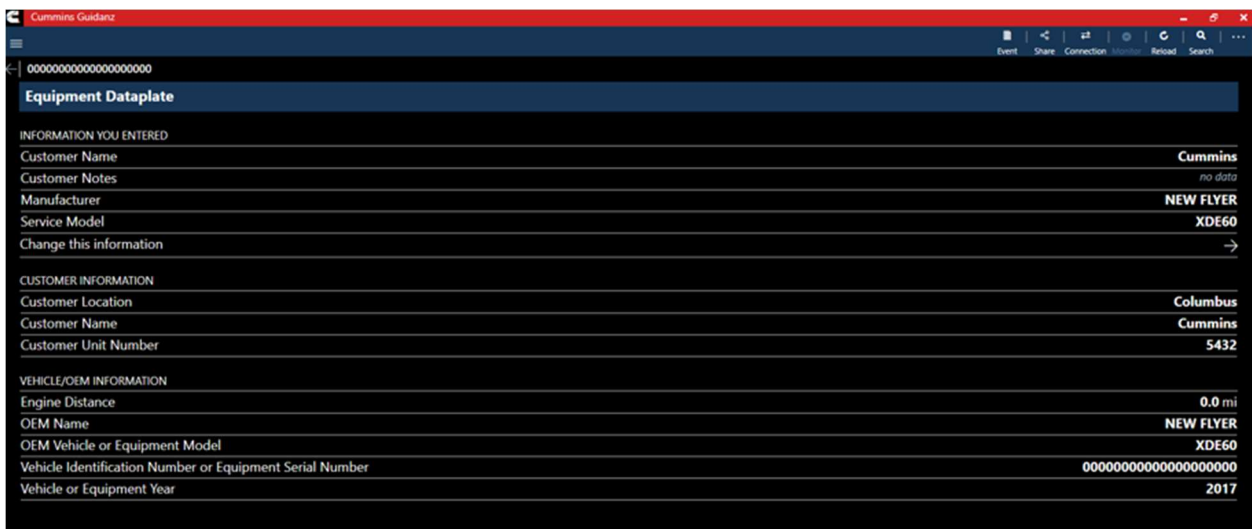


Figure 0-64 Equipment Dataplate screen





---

## ECM FAULTS

Selecting Faults on the Device dashboard displays the Faults and Analysis screen (internet connectivity required) with Primary, Related, & Unprioritized faults.

---

## HISTORY AND TEMPLATES

Event Folders can be viewed by clicking on History and Templates in the Start screen.

Event Folder Details can be viewed by

- clicking on an event in the Event Folders screen
- clicking on the bottom left icon on the chyron

---

## SCAN FAULTS

### POWER SYSTEM FEATURES

### POWERGEN PLUS SUBSCRIPTION

---

## ANALYZE EQUIPMENT

### CONNECTING TO CONTROLLER

When Analyze Equipment or Scan Faults is selected, the tool will offer a list of supported adapters to connect to the controller. After connection, Analyze Equipment will take users to the Device Dashboard. After connection Scan Faults will take users directly to the Active faults page.

The Guidanz Diagnostic Toolkit PC Application app will look for and offer a list of available COM ports for connection.

\*Note: Brain box only official supported Serial to USB adapter

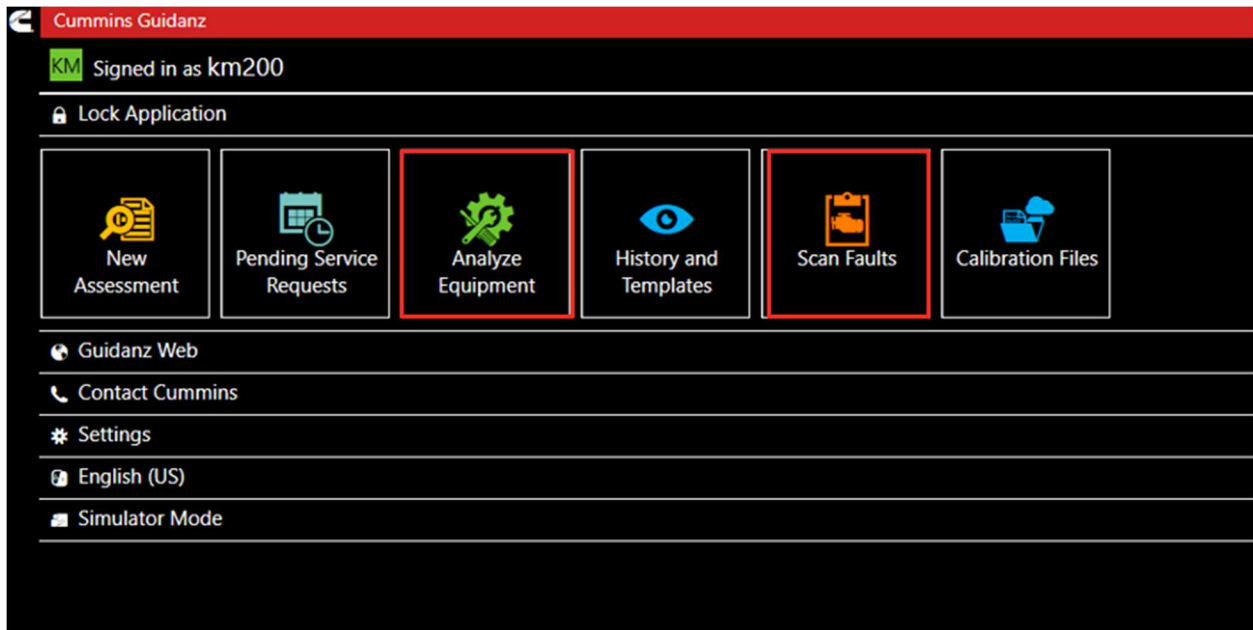


Figure 0-1 Dashboard

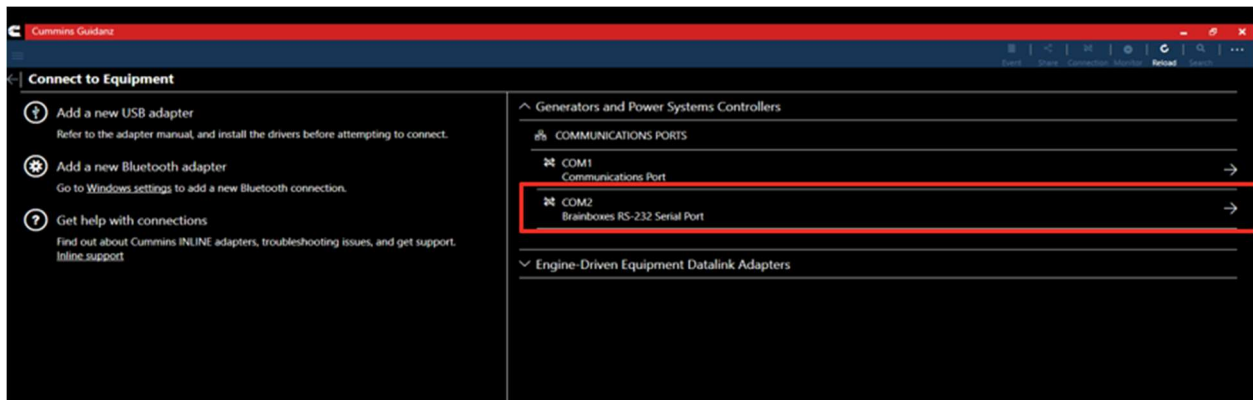


Figure 0-2 Connection screen with Generators and Power Systems Controllers expanded.

## INTAKE

During the Intake process, the application will connect to the COM port and pull the Customer Name, Genset Serial number, Unit Number, Genset Model Number, and hour meter. The intake Users can edit and change this information if they are incorrect.

The intake page also offers the ability to automatically create capture file during intake if desired. The default behavior of the “Create ECM Image” checkbox is controlled on the [Settings](#) Page.



**Equipment Information**

To give you accurate diagnostics data, first we need some information.

Customer Name

Genset Serial Number

Unit Number

Genset Model Number

Hourmeter

Complaint or Other Notes

Event Number WO-20230718-093947

Create Capture File

[Continue →](#)

Figure 0-3 Intake Page

## EQUIPMENT SUMMARY

The Equipment Summary screen will show (if available):

- Equipment Dataplate
- Cummins Genset Controller model

## EQUIPMENT DATAPLATE

The Equipment Dataplate can be accessed via the Equipment Summary Screen and Equipment Dataplate. It contains the information the user enters such as customer name, manufacturer, model, and well as other information.

Equipment Dataplate	
Data Captured	July 18, 2023 at 10:33:28
Engine Running Time	0.00 hours
Controller On Time OP	1708.317 hours
GENSET INFORMATION	
Genset Serial Number	0
Genset Model Number	0
Calibration Part Number	A064V955
Firmware Version Number	3.410
Calibration Revision Date	February 15, 2022
Engine Serial Number	0
Engine Model Number	0
Alternator Serial Number	0
Alternator Model Number	0
FACTORY INSTALLED FEATURE LIST	
No data available	
FIELD INSTALLED FEATURE LIST	
0326-6971	

Figure 0-4 Genset Equipment Dataplate Screen.



## DEVICE DASHBOARD

The device dashboard can be accessed by clicking on a Genset Controller from the Equipment Summary screen. The device dashboard shows all functionality available for the specific device.



Figure 0-5 Device Dashboard

## FAULTS

Selecting Faults on the Device Dashboard displays the Faults and Events add-in.

### ACTIVE FAULTS

By default, the Faults and Events add-in will open on the active faults tab. This tab gives the fault number, description, type, and number of occurrences of the current active faults.

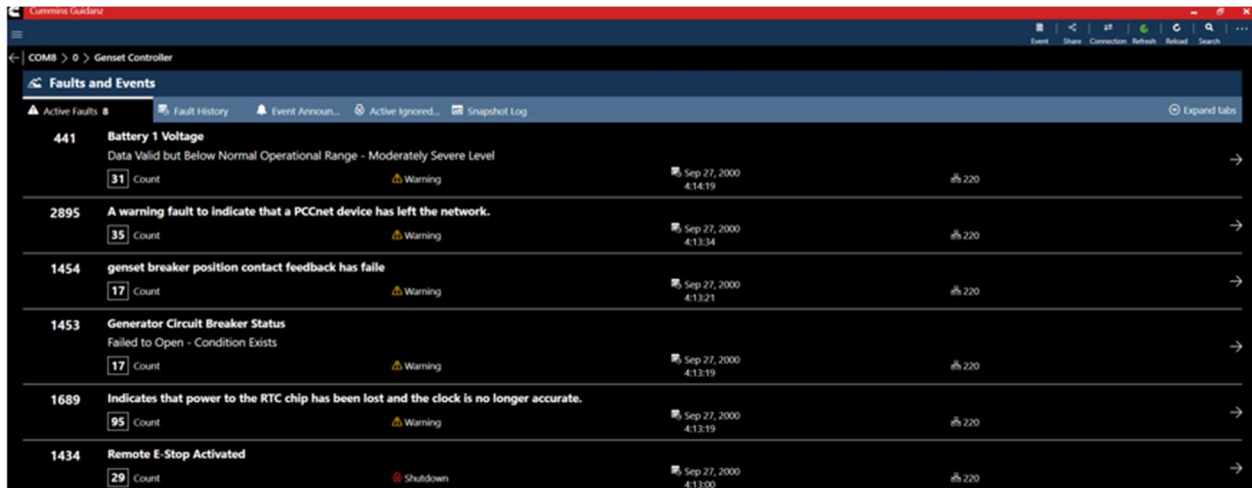


Figure 0-6 Active Faults

## FAULT DETAILS

Clicking on an individual Cummins fault code displays the Fault Details, and the fault snapshot, if supported.

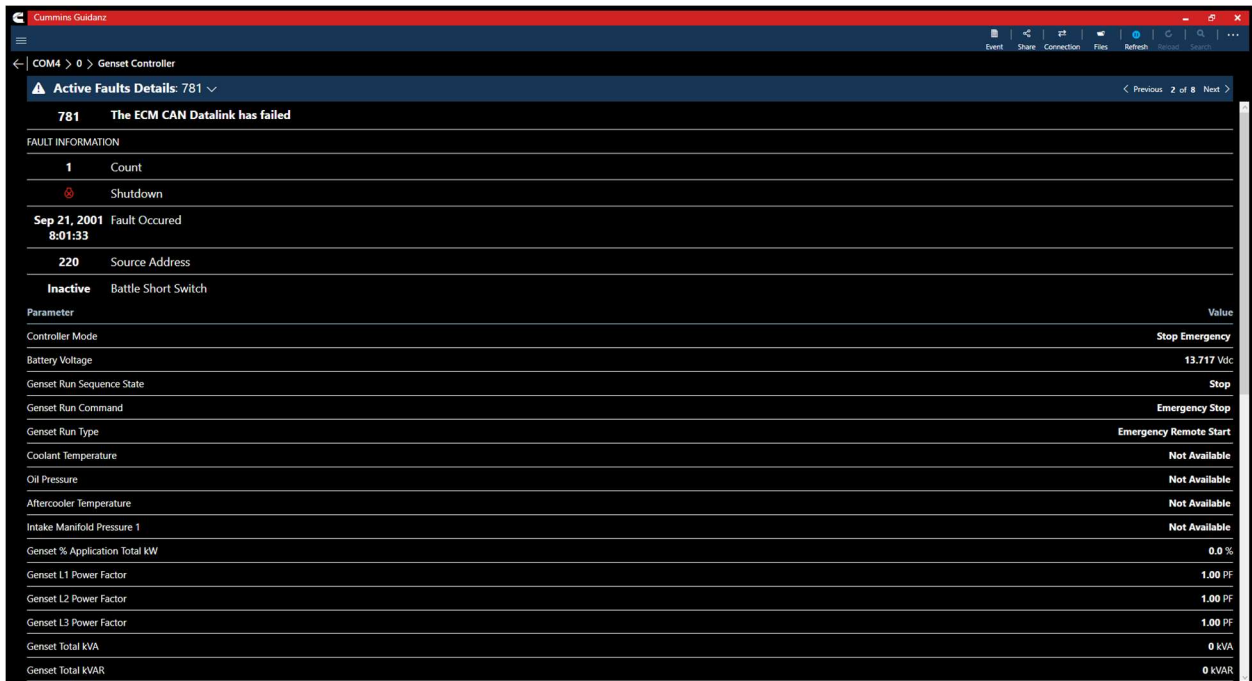


Figure 0-7 Active Fault Snapshot

## FAULT RESET

Users can click on “...” for access to the “Clear Faults option.



Figure 0-8 Reset Faults

## FAULT HISTORY

Clicking on the Fault History tab allows users to view active and inactive faults.

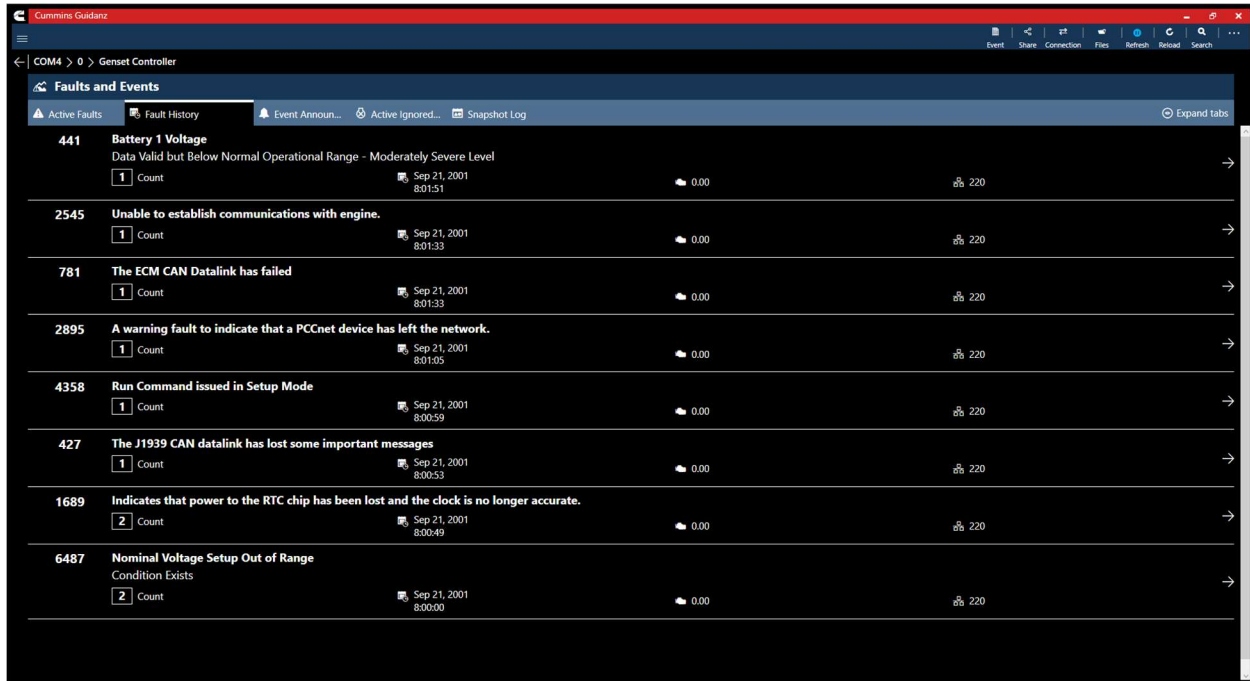


Figure 0-9 Fault History

## EVENT ANNOUNCEMENT'S

Clicking on the Event Announcement's tab allows users to acknowledge individual or all announcements.

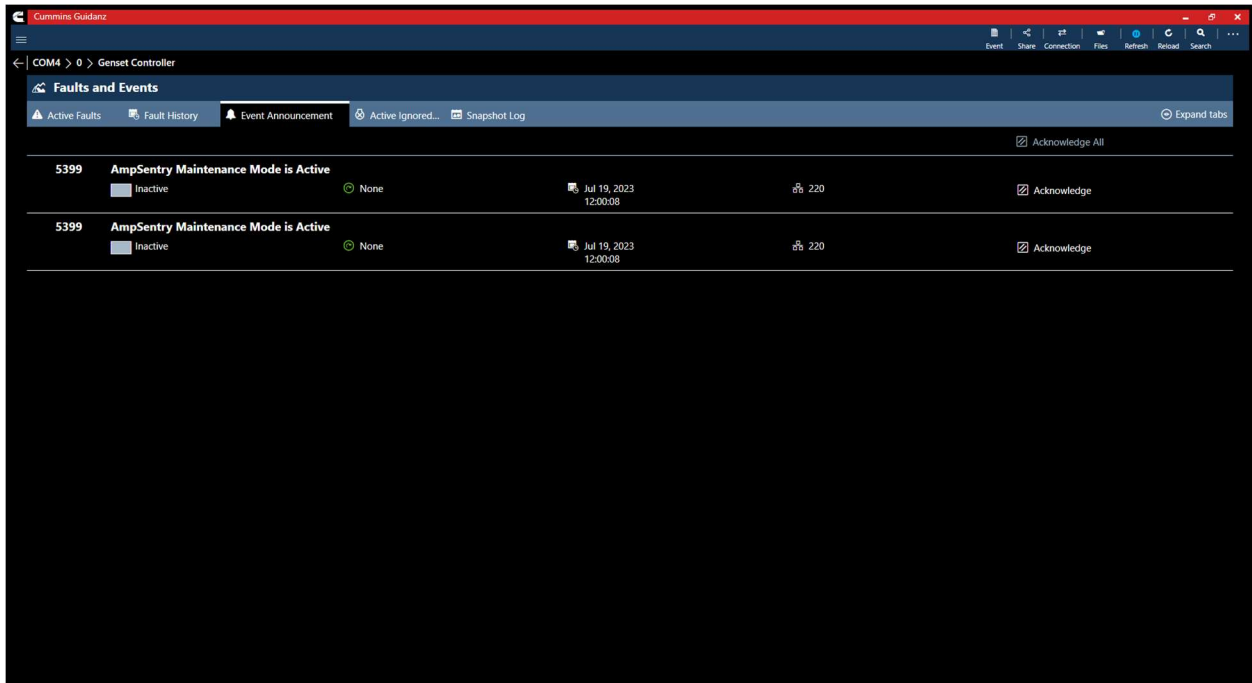


Figure 0-10 PowerGen Event Announcements

## ACTIVE IGNORED ENGINE SHUTDOWN FAULTS

Clicking on the Active Ignored Engine Shutdown tab allows the user to view the current ignored shutdown events.

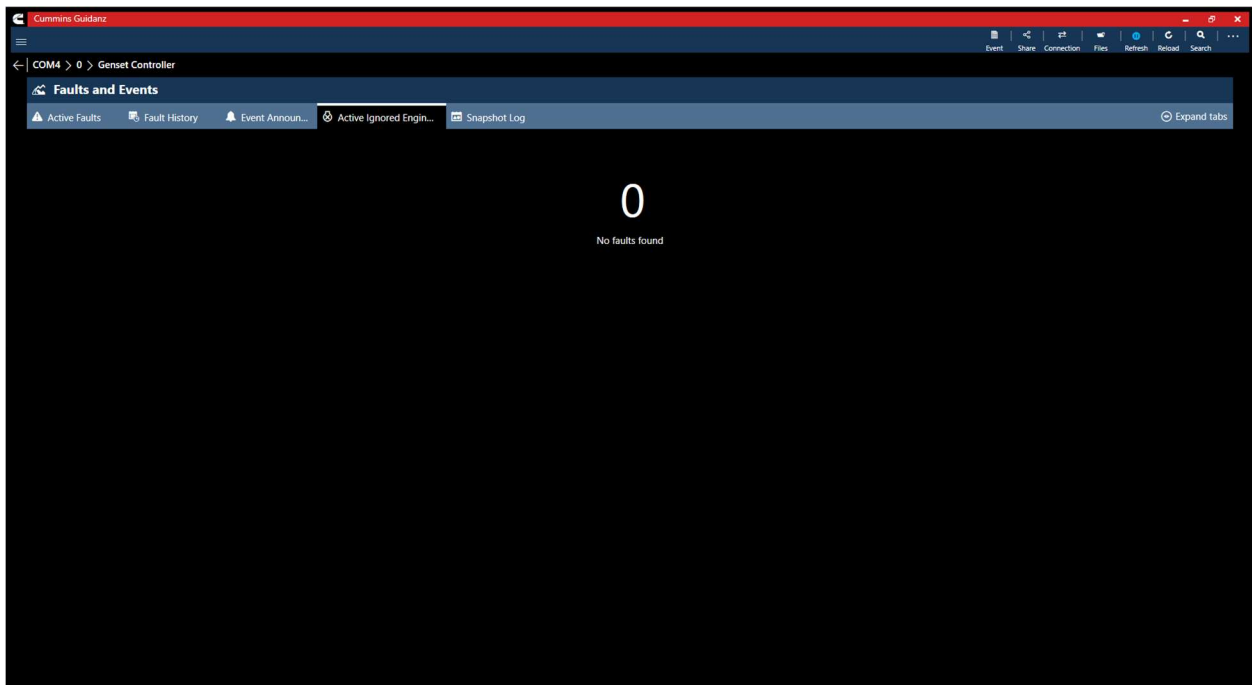


Figure 0-11 PowerGen Active Ignored Engine Shutdown

## MAINTENANCE ALARM STATUS



Click on the Maintenance Alarm Status tab allows the user to view the current active maintenance alarms.

- Note that this feature is not supported on the PCC3300 V1 controller.



Figure 0-12 Maintenance Alarms

## SNAPSHOT LOG

Clicking on the Snapshot Log allows users to view snapshot logs and number of occurrences for all faults enabled with a snapshot.

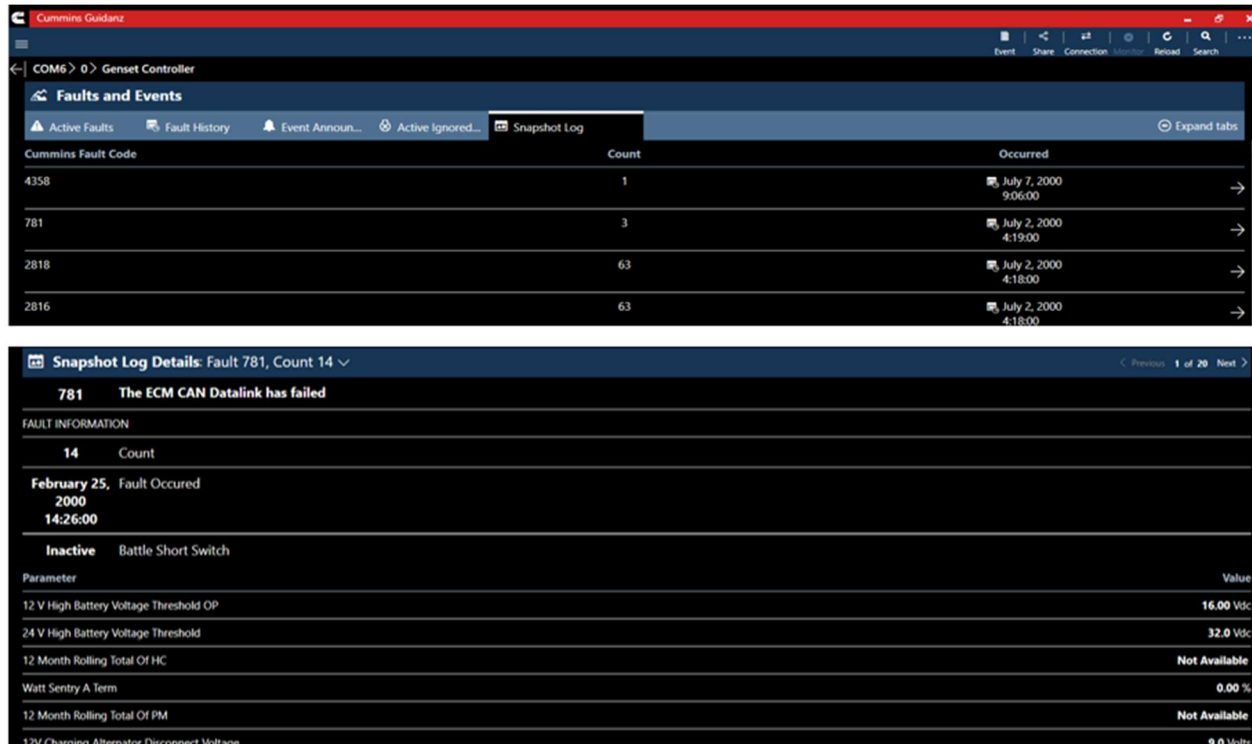


Figure 0-13 Snapshot Log

## DATA MONITOR

Clicking on Data Monitor on the Device Dashboard takes the user to the Data Monitoring screen which allows the user to monitor and record parameters. Parameters are divided into pre-defined groups that





can be selected based on the Gen-set behavior being experienced. When clicking on Monitor the user can monitor all parameters supported by the controller.



Figure 0-14 Data Monitor Pre-Defined Groups

## MONITORING

Users can start and pause (Stop) the data monitoring and change the time settings. When clicking on the Sample time, the user can change the monitoring speed, and the max recording time.



Figure 0-15 Data Monitor and Record; adjusting Monitor frequency.

## RECORDING



Recording can be started by selecting the Recording icon in the control bar. While recording, each time the user clicks the Pause button or leaves the DML screen a record file created and stored.



Figure 0-16 Data Monitor; recording

## GRAPHICAL MONITORING

Selecting the “Visualize Data” button, allows users to create a graphical representation of numerical and enumeration type parameters.

After selecting parameters to graph, users can use the following actions to control the graph:

1. Left click in graph to stop auto-scrolling.
2. Double click when stopped, to resume auto-scrolling.
3. Annotate any point on the graph by right- clicking.
4. Group or separate graphs with the same units by selecting the “Grouped” or “Separate” buttons.

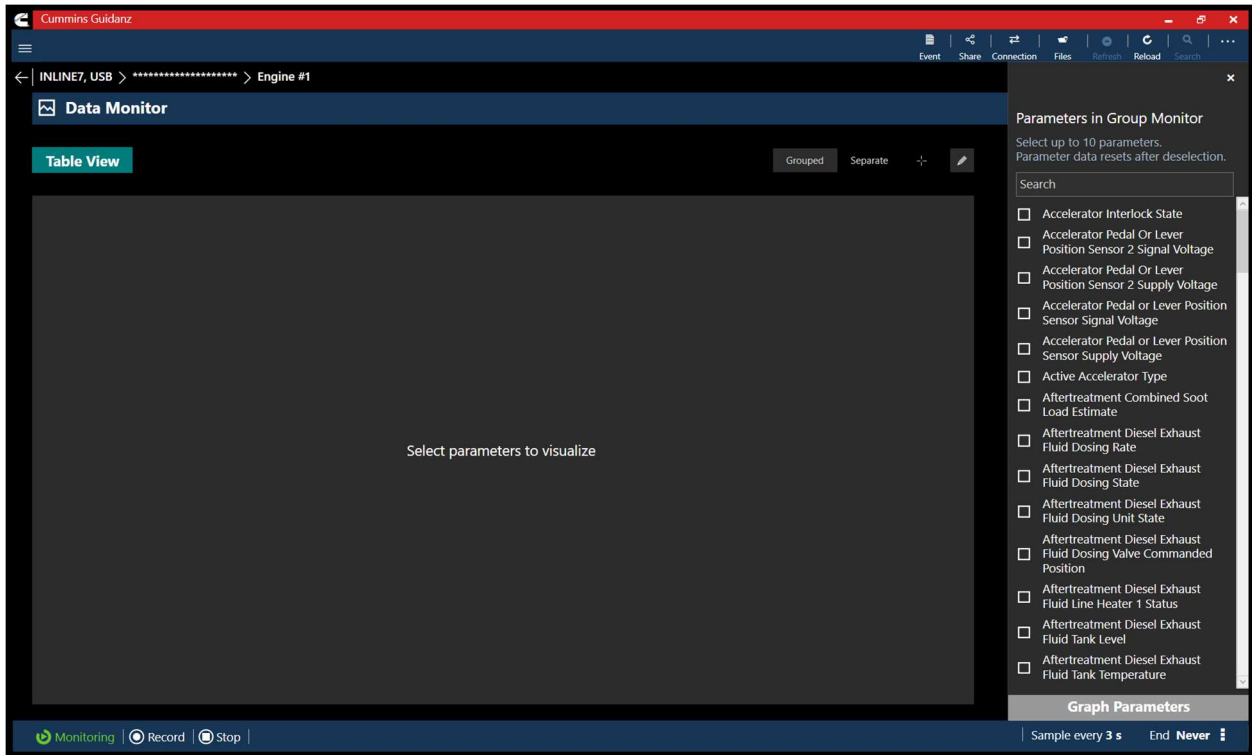


Figure 0-17 Graphical Monitoring parameter selection screen.



Figure 0-18 Graphical Monitoring Screen



## CUSTOM GROUP MANAGEMENT

Custom groups can be created, imported, and saved from the “Custom Groups” tab in the Data Monitor add-in of Guidanz .

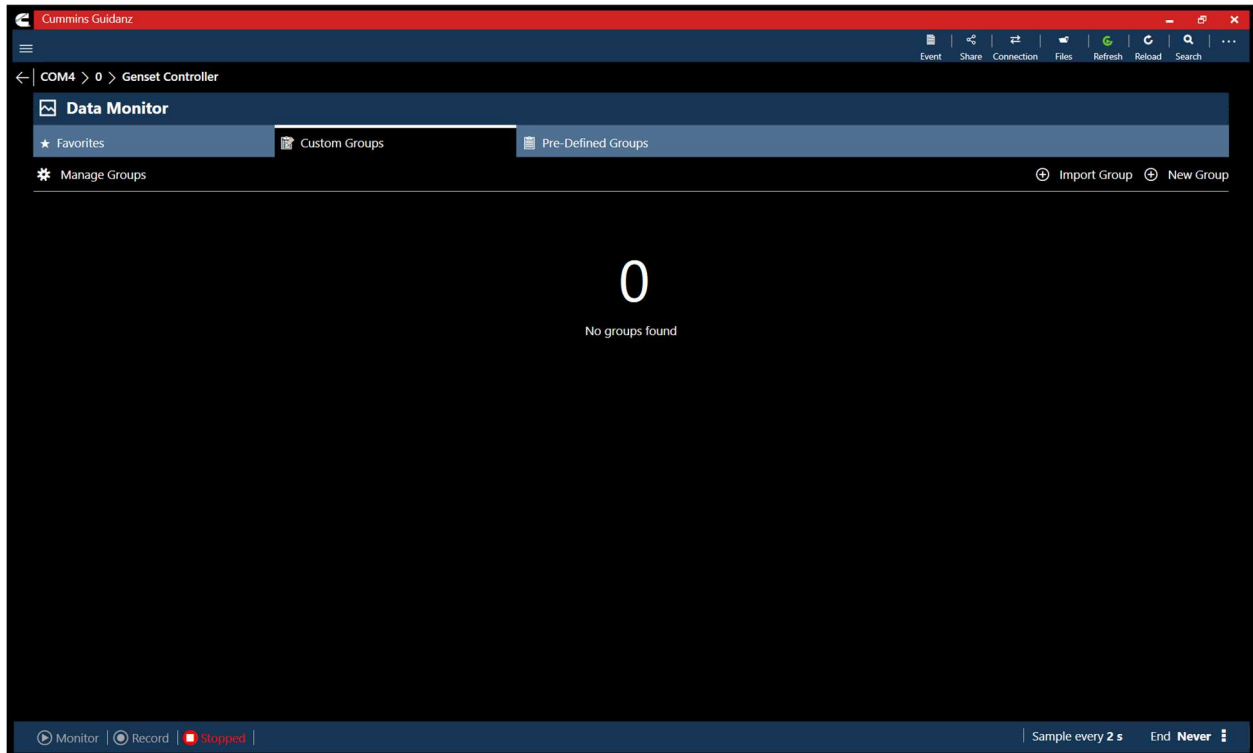


Figure 0-19 Custom Groups tab.

## GROUPS

Users can select pre-defined groups with pre-defined parameters to monitor or record. A user can also create and save a new custom group with parameters selected. During the selection process the parameters grayed out are not supported by the controller. Custom groups can be added to Favorites.

## CUSTOM GROUP EXPORTING



While creating a custom group, users have the option to export the group as a .TPL file or save the group to use for future monitoring sessions.

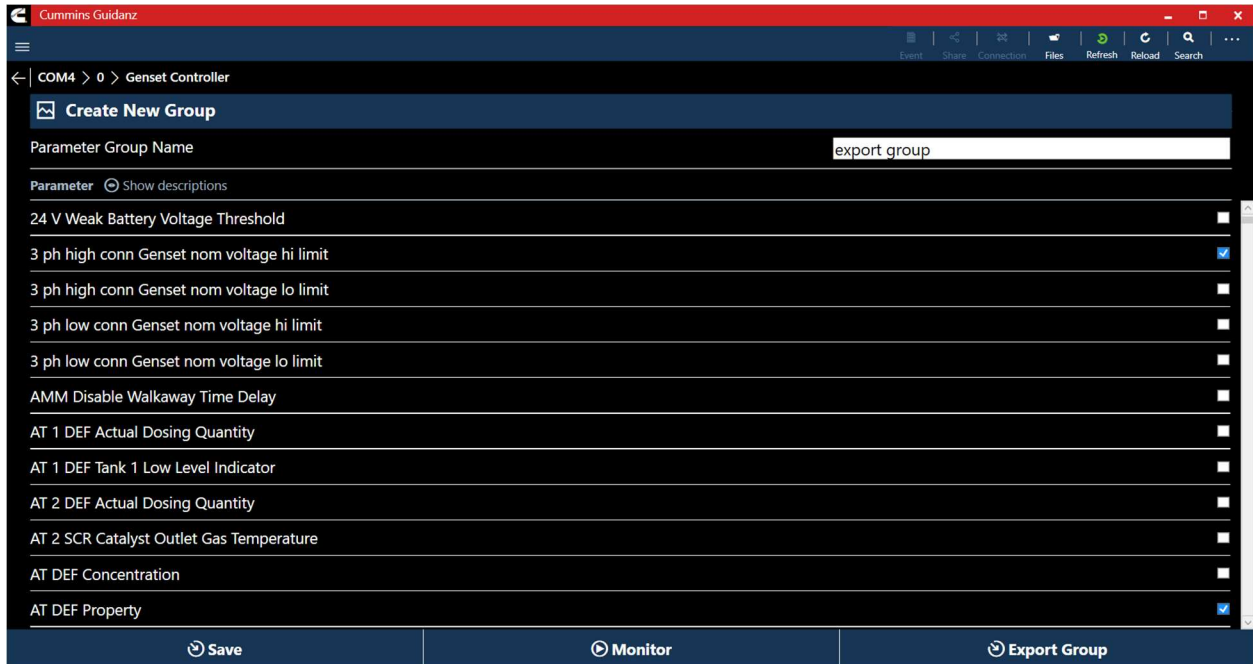


Figure 0-20 Data Monitor Creating Custom Group

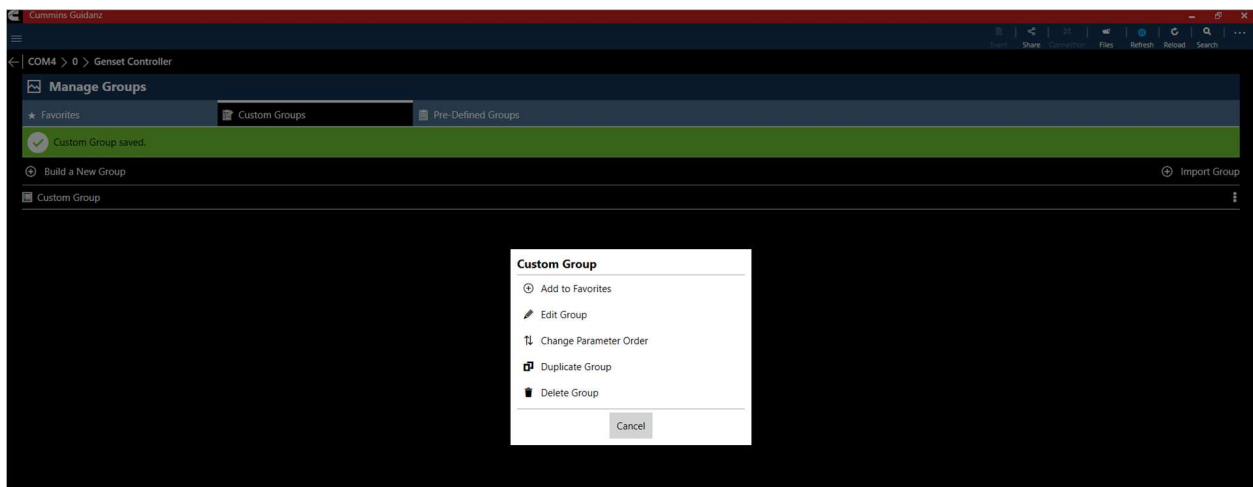


Figure 0-21 Data Monitor Adding group to Favorites.

## DEVICE SETTINGS

Clicking on Device Settings on the Device Dashboard, the user is taken to the Device Settings screen where the user can see the values of each parameter. User can change parameter and sub-parameter values that are not locked by changing the value within the specified min and max values

## SEARCH

User can search Device Settings for the name or unit of a parameter to quickly find a specific parameter that requires modification.

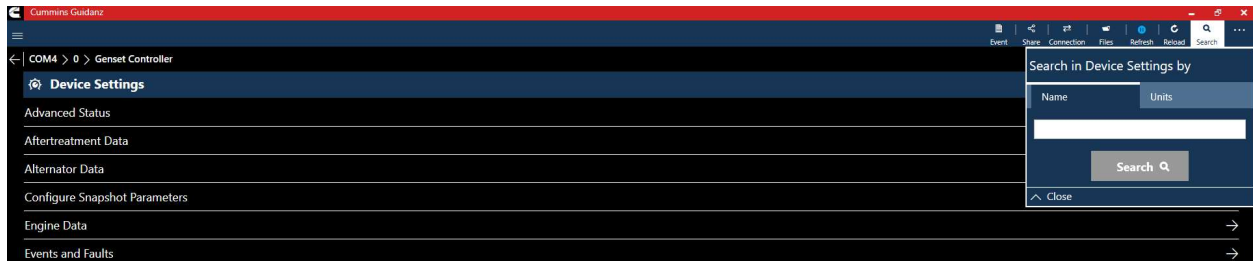


Figure 0-22 Device Settings Search by Name.

## FAULT CONFIGURATION

Clicking Device Settings, Events and faults, Fault record List on the Device Dashboard allows the user to set Genset response, Snapshot creation, Dialout, and Derate % for specific fault codes.

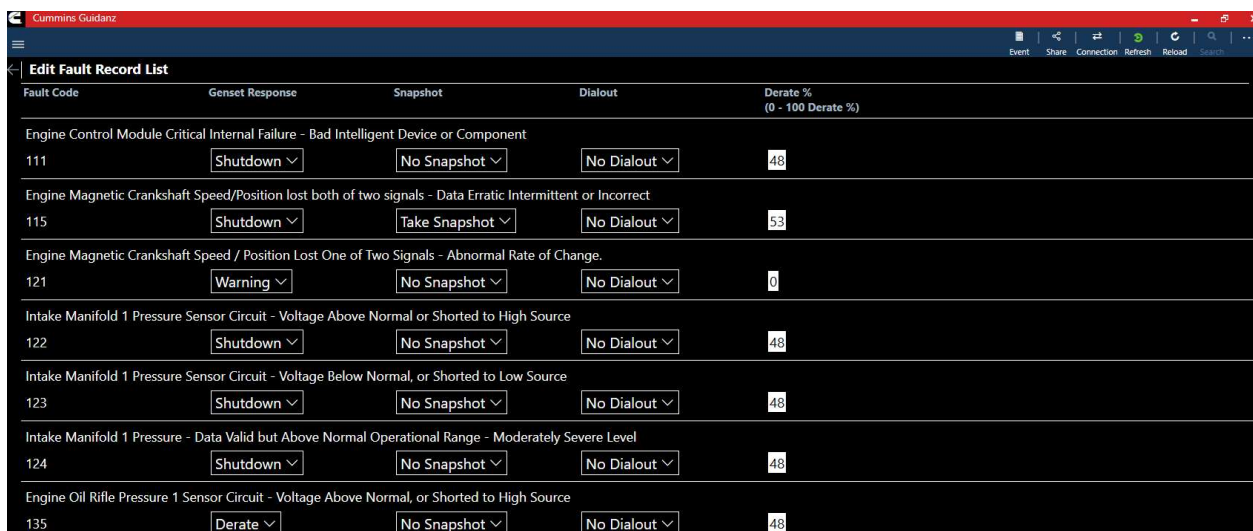


Figure 0-23 Fault configuration screen.

## FAULT SNAPSHOT PARAMETER CONFIGURATION

Clicking Device Settings, Configure Snapshot Parameters allows the user to configure the included and order of parameters in the Fault Snapshot. After selecting the parameter to replace, Guidanz will show the new parameter, and the parameter that is being replaced. User can click on View and Save changes, Save Changes to finalize the Snapshot.

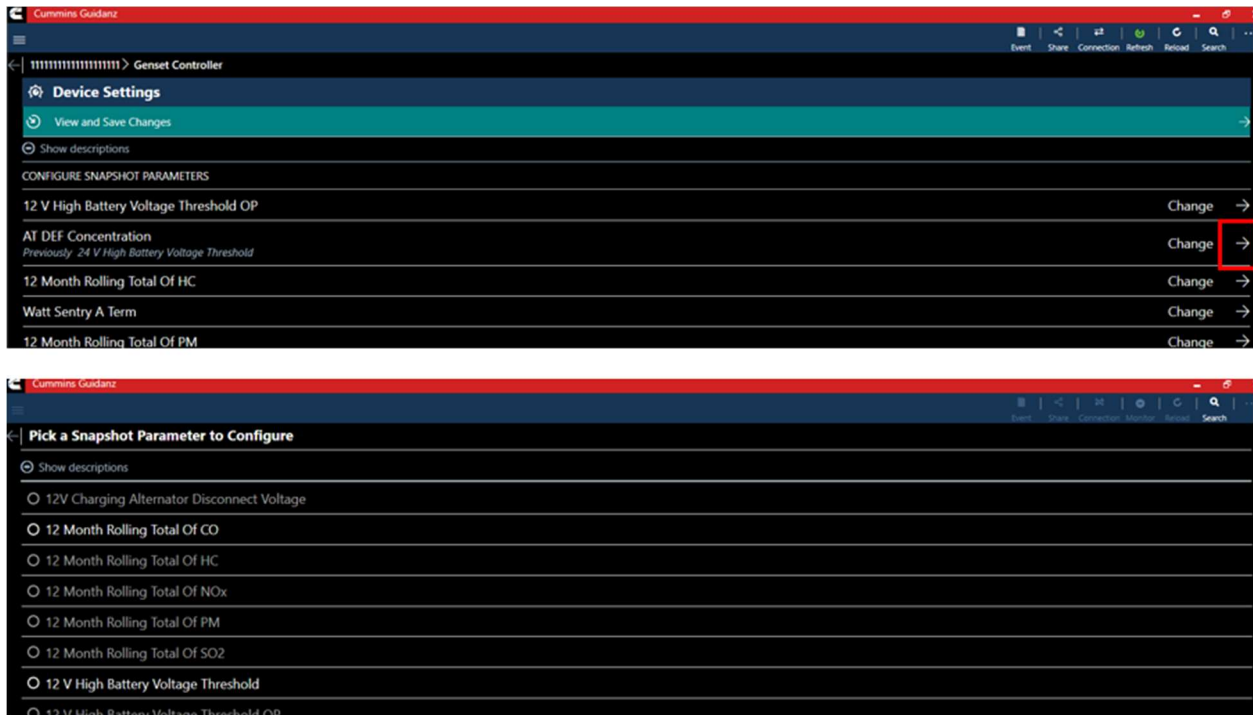


Figure 0-24 Fault configuration Screen continued.

## CALIBRATE CONTROLLER

If an updated calibration is selected users can select the Download Calibration button directly from the Device Dashboard to begin the calibration process.

Selecting Calibrate Controller will allow users to see the current Calibration Firmware Version and any new Firmware Version available. Users can also browse and download calibrations through the search online option. Users can also browse and download calibrations through the search online option.

## DOWNLOADING TO DEVICE

Users can use the Search Online Calibrations to select a supported controller and download the latest calibration package to their PC. After downloading, the calibration process can be started by clicking the three dot menu of the desired calibration.

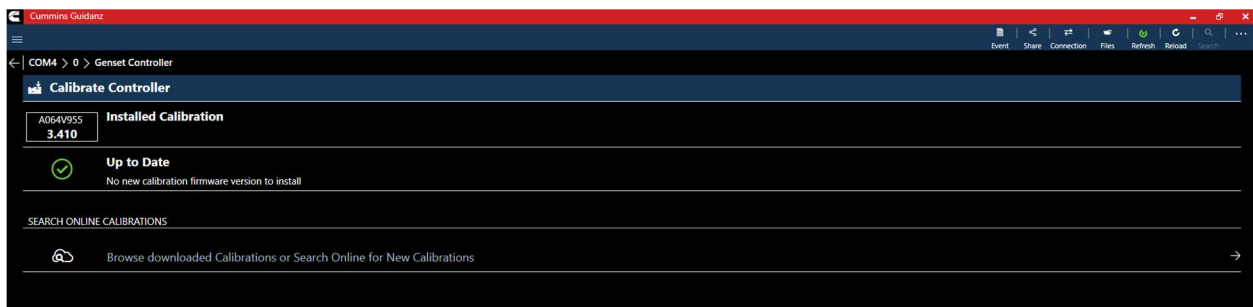


Figure 0-25 Calibration Add-in



Figure 0-26 Option to download new Calibration to PC.

## NOT AVAILABLE & SPECIAL CALIBRATIONS

. Calibrations that are “Special” or not available will be highlighted after downloading the calibration package to the PC.

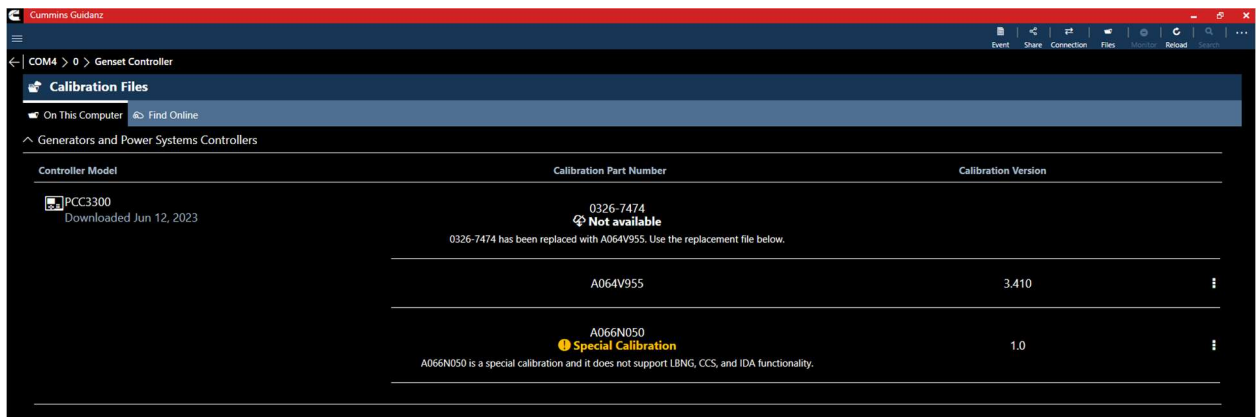


Figure 0-27 Special Calibration highlight.

## DOWNLOADING TO CONTROLLER

The calibrate controller functionality is broken into several pages.

- Overview Page.
  - This page gives an overview of the process and the required instructions.



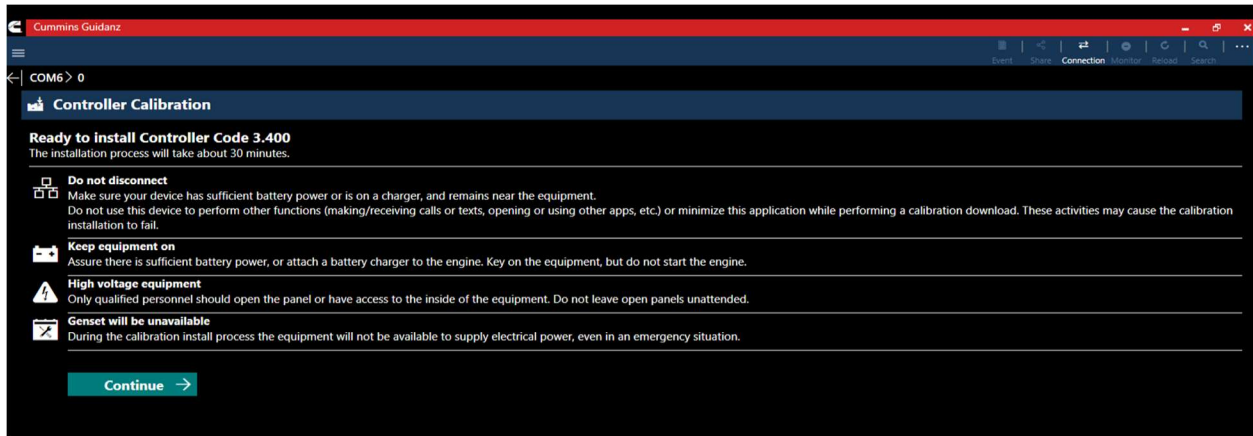


Figure 0-28 Calibration process; Overview page

- Risks, Warnings, and Save and Restore option.
  - Please read the Risks of Calibration page to ensure familiarity with the possible failure effects and remediation process.
  - Users have the option select a source of parameters to be written to the controller after the calibration is completed.
  - Users can also select specific Feature Files to write to the controller after the calibration is completed.

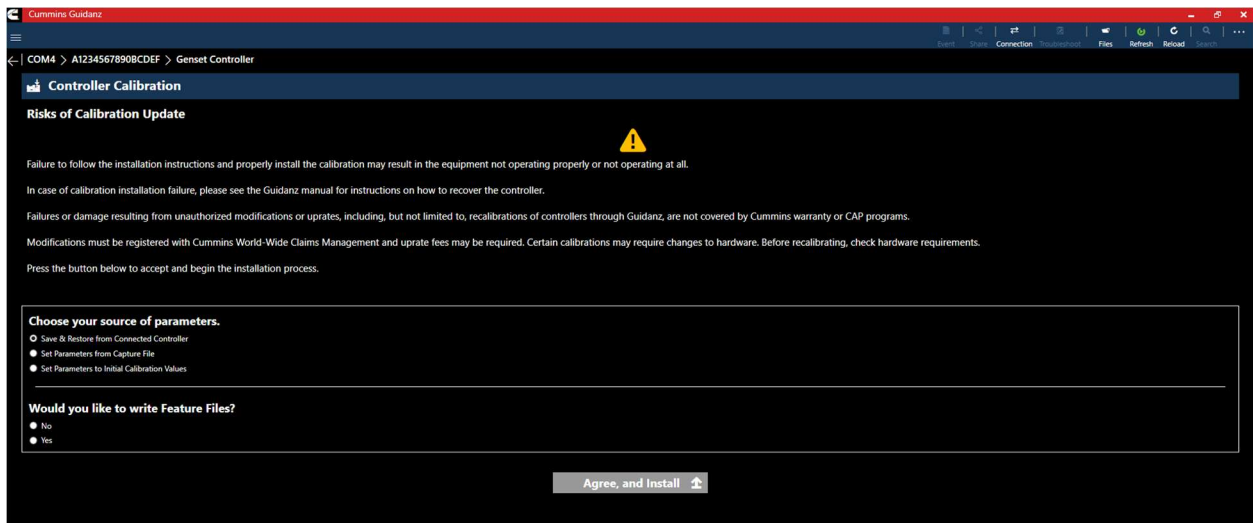


Figure 0-29 Calibration Process; Warnings and Save and Restore.

- Process confirmation.
  - Select the Begin Process button to begin the calibration transfer to the controller.

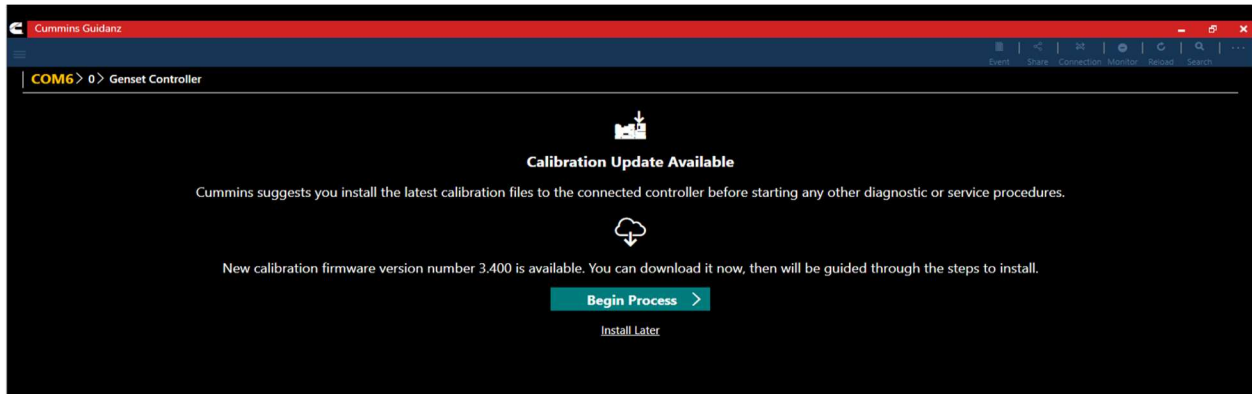


Figure 0-30 Download page.

- Download page.
  - Step 1: Saving optional parameters.
  - Step 2: Transferring base calibration to the controller.
  - Step 3: Writing optional parameters back to the controller.
  - Step 4: Finalizing the calibration process.

## SAVE & RESTORE

---

When the Save and Restore checkbox is checked, Guidanz will attempt to write the custom parameter values back to the controller after the base calibration update process is completed.

## PARAMETERS NOT RESTORED

---

After the calibration process is completed. Any parameter values that were not restored will be highlighted to users. These values will need to be written manually in the Device Settings add-in.

---

## AUDIT TRAIL

Clicking on Audit Trail on the Device Dashboard the user is taken to the Audit Trail screen where the user can see the audit trail of the connected Genset.

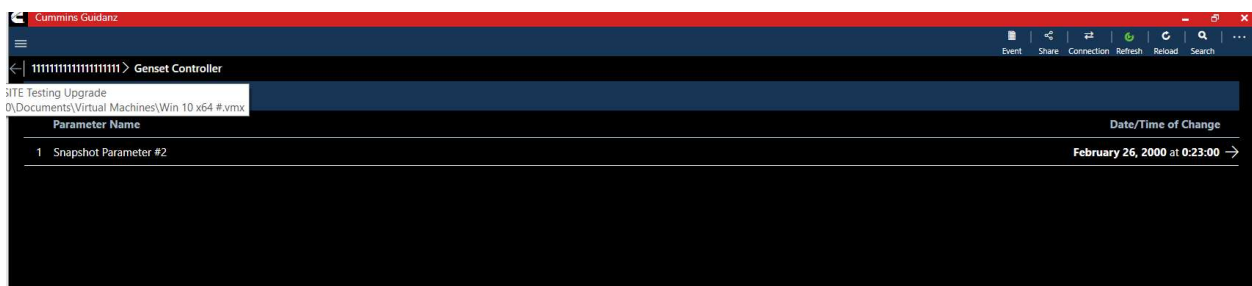


Figure 0-31 Audit Trail

## AUDIT TRAIL RECORD

---

Clicking on one of the Audit Trail records will give detailed information on the previous value, current value, and Date/Time the change was made.



Figure 0-32 Audit Trail individual record details.

## FEATURE FILES

Clicking on Feature Files will allow the user to view and install feature files for the connected controller.

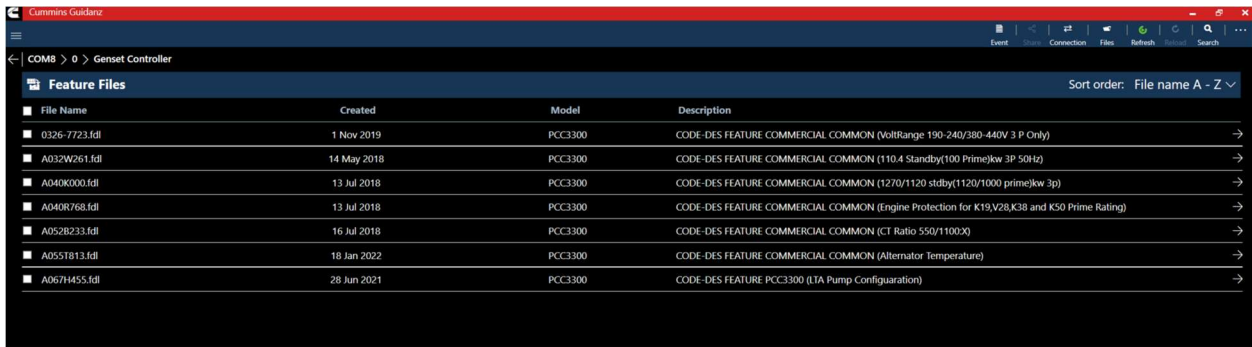


Figure 0-33 Feature files

## VIEWING PARAMETER VALUES

Selecting the Reveal arrow for a Feature file will display all parameters and values.

## WRITING TO CONTROLLER

Selecting one or more of the Feature File checkboxes will enable the Write to Controller on the Feature File screen.

## CAPTURE FILES

Selecting Capture files while connected to a controller, will display all compatible capture files. When not connected to a controller, all Capture files on the PC will be displayed.

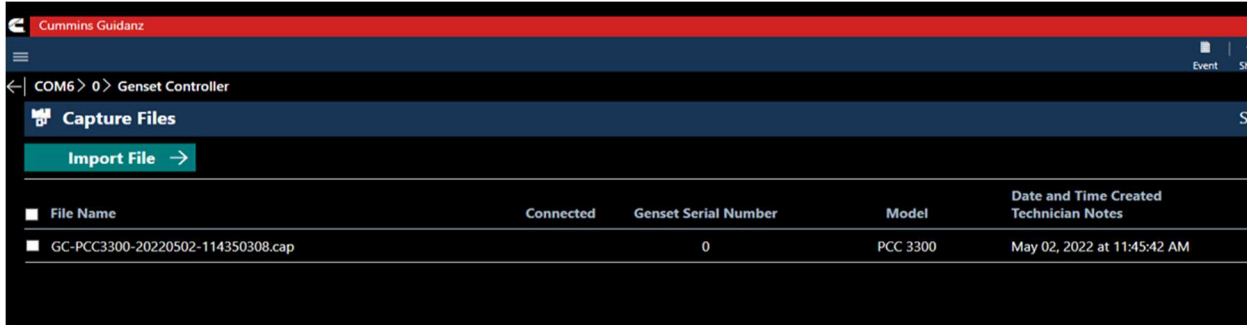


Figure 0-34 Capture Files add-in with Import File button.

## IMPORTING A CAPTURE FILE

Selecting Import File will allow users to navigate and select Capture files located on the local PC and load them into Guidanz Diagnostic Toolkit.

Note: Any capture file can be imported, but when connected to a controller, only compatible files will be displayed.

## EXPORTING A CAPTURE FILE

Users can export a capture file to CSV by selecting the three-dot menu for any capture file in the Captures Files add-in. After the export is completed, Guidanz will display the location and file name of the created CSV file.

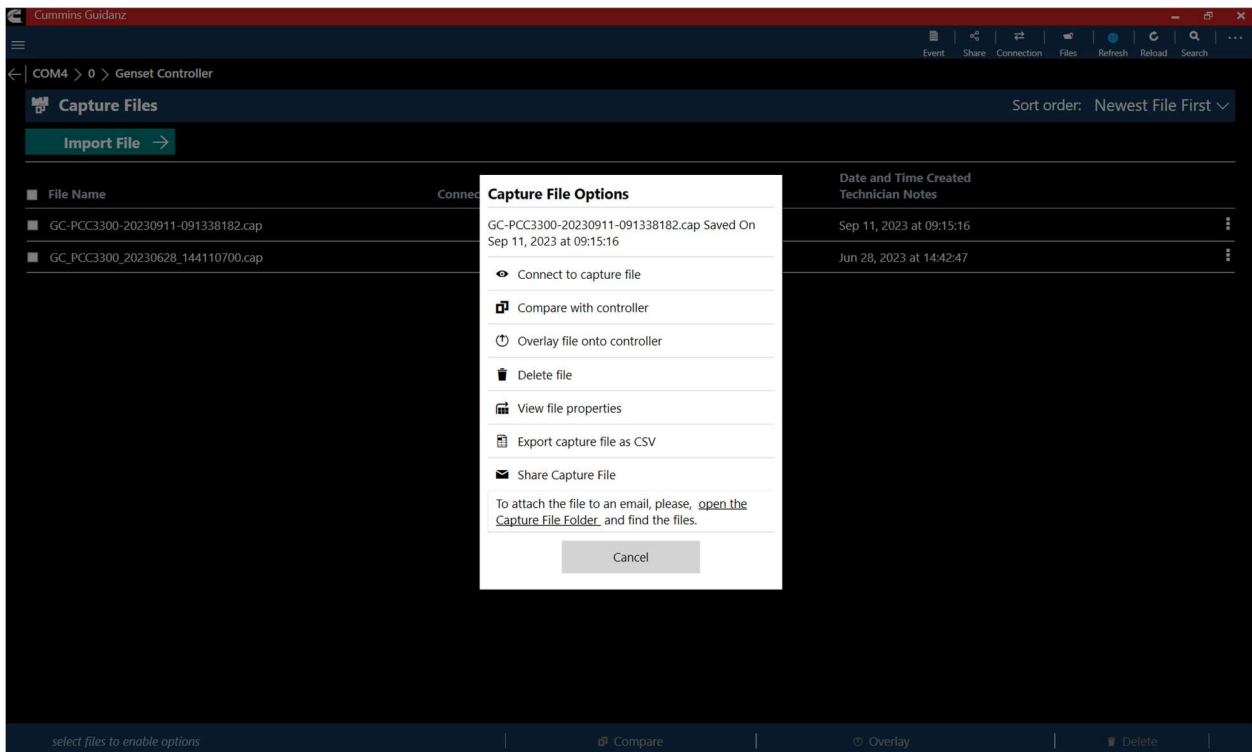


Figure 0-35 Capture File export.

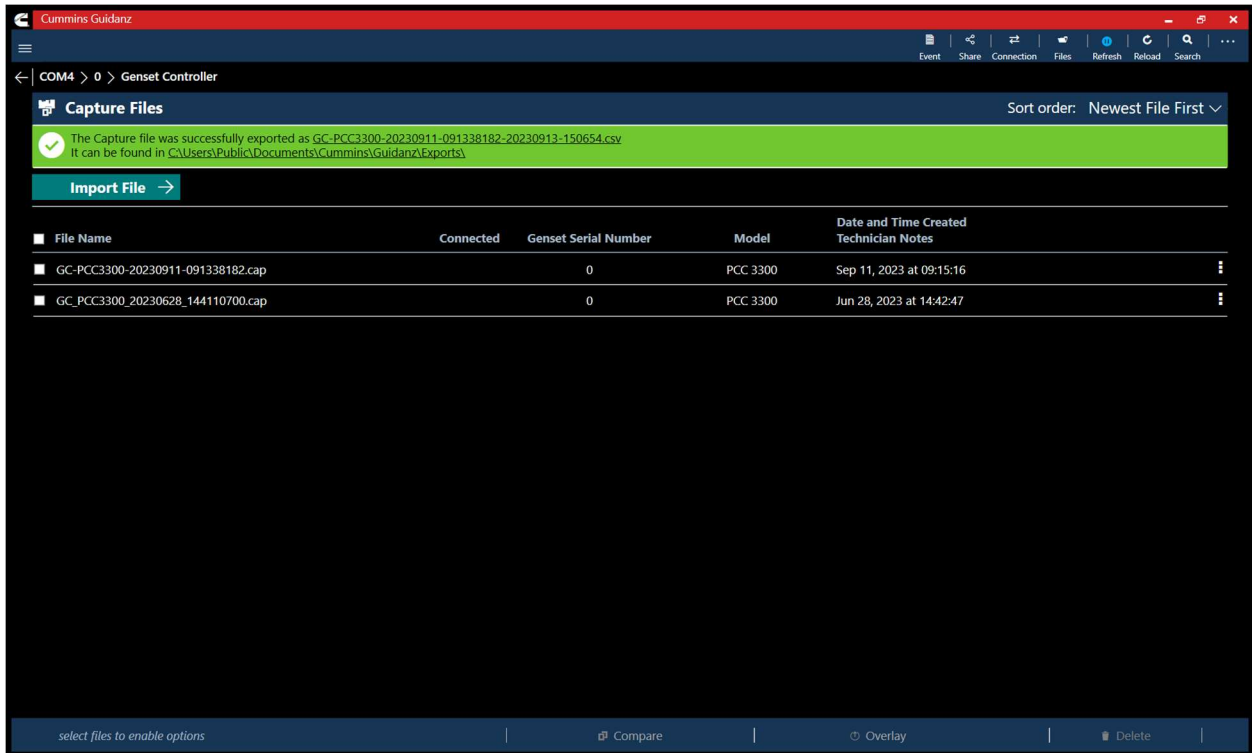


Figure 0-36 Capture file export success.

## CAPTURE FILE OVERLAYING

Guidanz Diagnostic Toolkit – PC Application allows users to overlay all or only specific parameters from a capture file to a connected controller. Clicking the 3 dot controls while on the Capture File page and selecting Overlay file into controller will open the screen that will allow you select any or all parameters that you wish to be overlaid.

After selecting the Features and parameters to overlay, select the Continue button. Any Parameter not able to be written to the controller will display after the Overlay process.


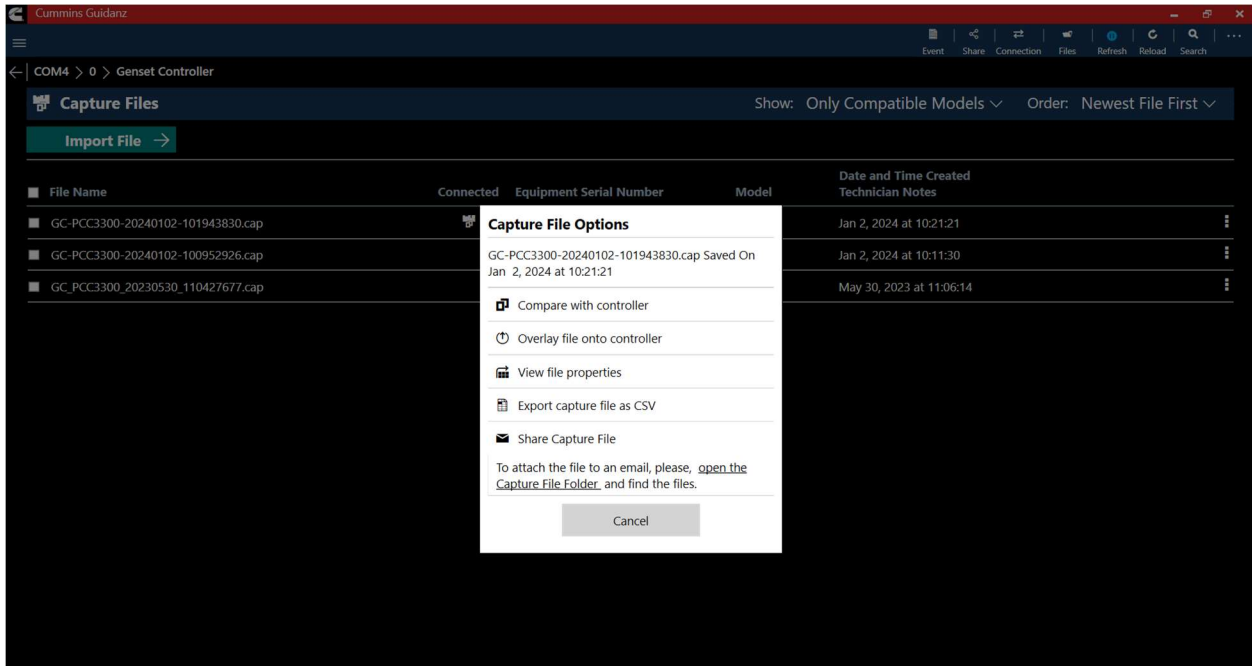


Figure 0-37 Capture File Overlay selection screen.

After selecting Overlay, users have the option of writing all parameters to the controller or selecting individual configurable parameters to write.



Selecting the Partial Overlay radio button will open a screen listing all of the configurable parameters in the capture file that can be written. Users can select and de-select specific parameters and groups with the checkboxes.

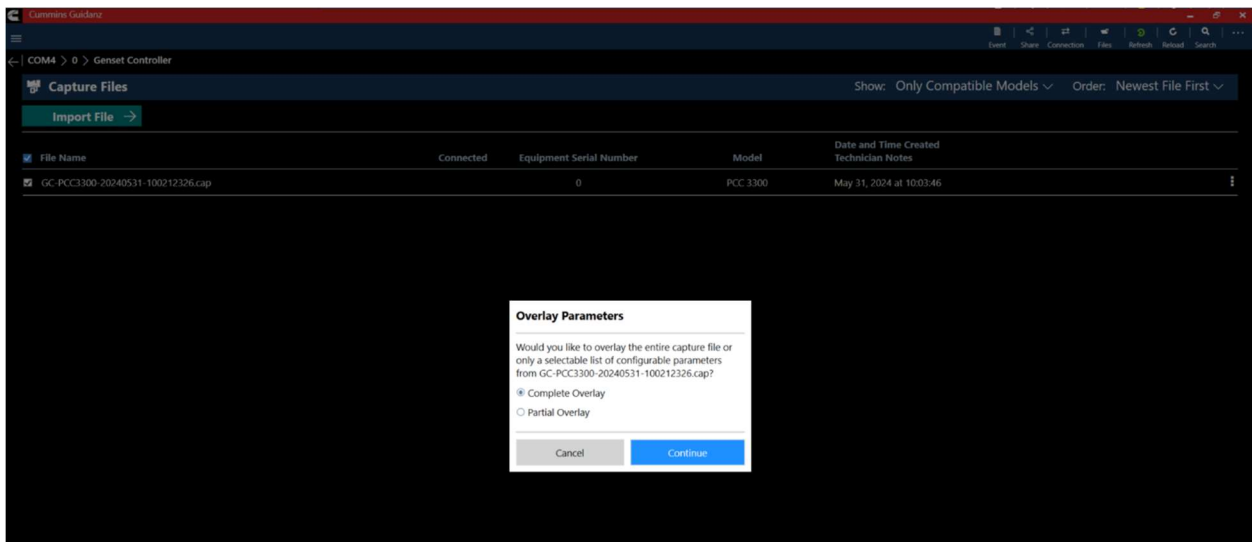

Any parameters that fail to write, will be highlighted to the user after the process has completed.

Parameter	Range	Controller	Capture File
Backup Start Disconnect/Configurable Input #33 Function Pointer		Default	failed <span>!</span> Default
Coolant Level/Configurable Input #5 Function Pointer		Default	failed <span>!</span> Default
Daylight Savings Start Hour	2 - 19	2	out of range <span>!</span> 1
Fault Reset/Configurable Input #10 Function Pointer		Default	failed <span>!</span> Default
Gas Fuel Type		Natural Gas	failed <span>!</span> Natural Gas
High Alternator Temperature 1 Shutdown Threshold	100 - 1000 degF	301 degF	out of range <span>!</span> 1 degF
Load Time ( Hrs )	0.00 - 65535.00 Hours	0.00 Hours	failed <span>!</span> 0.00 Hours
Low Fuel/Configurable Input #6 Function Pointer		Default	failed <span>!</span> Default
Overload Shutdown threshold	70.00 - 655.35	Not Available	out of range <span>!</span> Not Available
Prelube Cycle Time	0.1 - 1000.0 hours	6553.2 hours	out of range <span>!</span> 6553.2 hours

Figure 0-38 Capture file Overlay; failed parameters.

## CONNECTING TO A CAPTURE FILE

Clicking the 3 dot controls while on the Capture File page will give users the option to connect to the selected capture file. Once connected, users can view the parameter values within the file. Users can connect to multiple capture files and controllers simultaneously. The current active connection can be switched by selecting “Connection” from the toolbar.

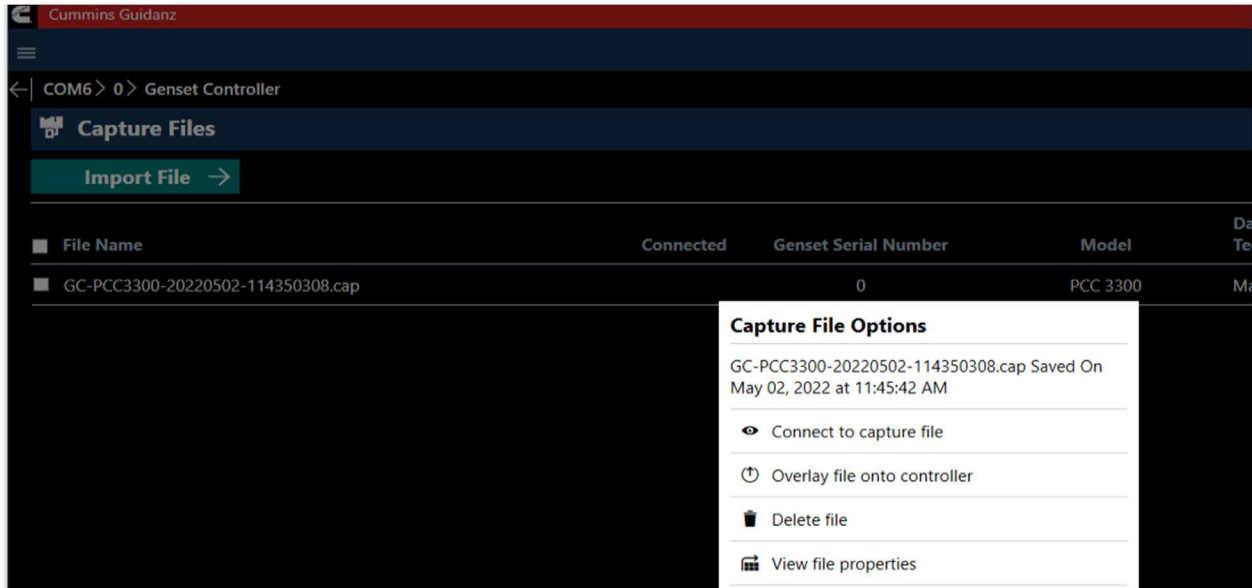


Figure 0-39 Capture file connection.

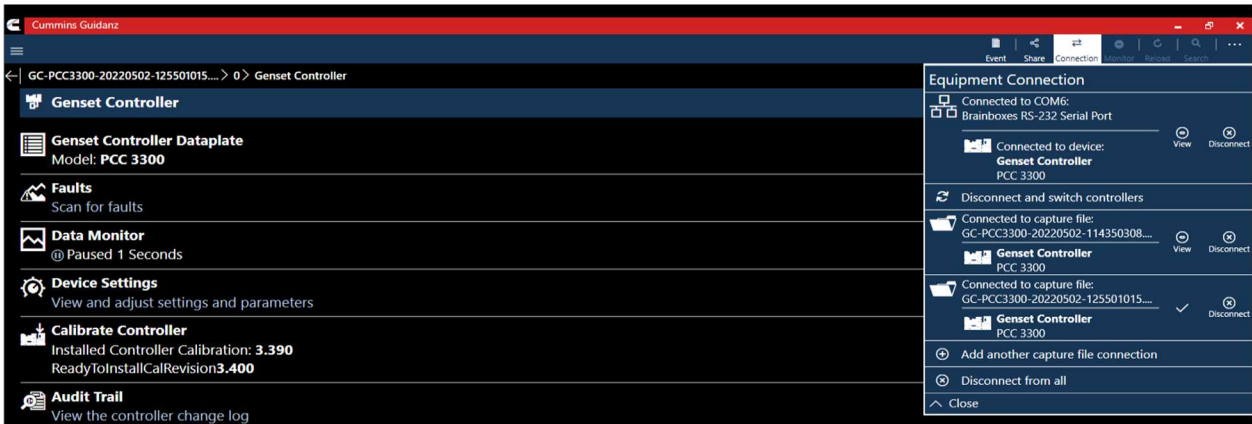


Figure 0-40 Connection Flyout

## CAPTURE FILE COMPARISON

Users can perform a Capture File comparison either between two Capture files or between a live controller and a capture file. From the Capture File add-in, select two Capture files to enable the Compare button.



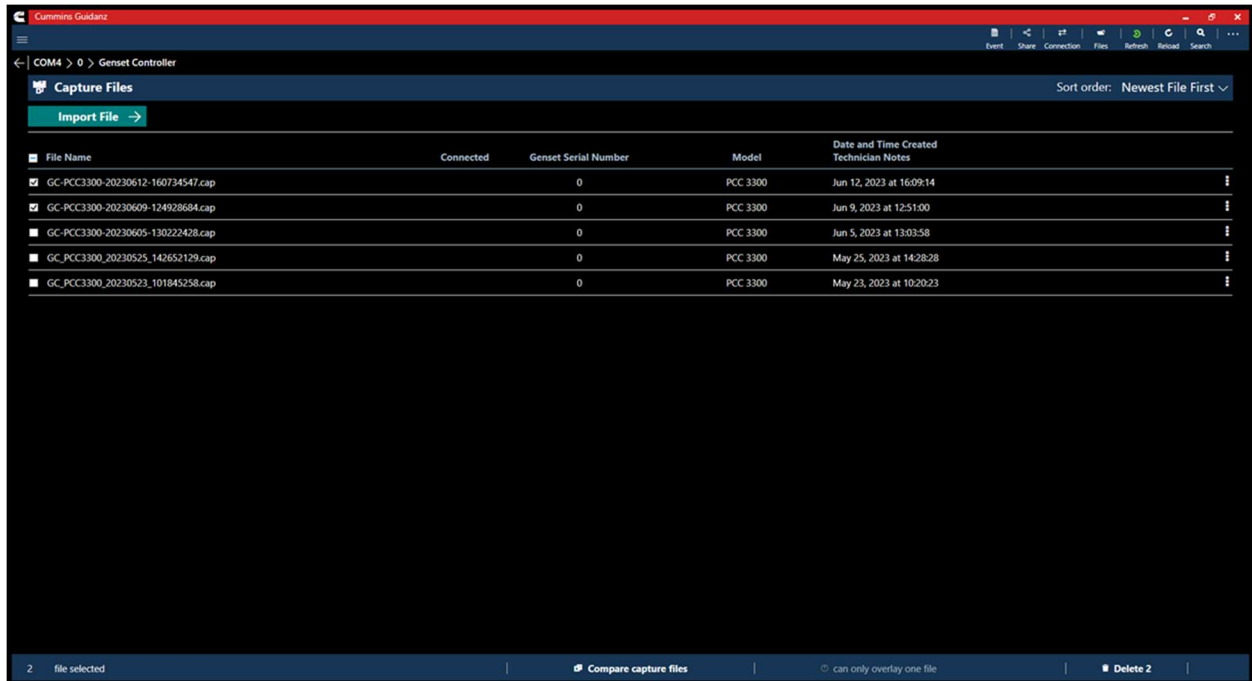


Figure 0-41 Capture File compare.

## CAPTURE FILE COMPARISON OUTPUT

After the comparison process is completed, the Output screen will be displayed. Standard parameters will be compared directly on the output page. Users have the option to Highlight Differences, Show Same, different or all parameters; and sort the order of the parameters. Data Tables and XY Tables can be exported to CSV for comparison. Selecting to CSV will export the comparison to a zipped file with both CSV's.



Parameter Name	GC-PCC3300-20230911-091338182.cap	PCC 3300
50Hz KW Load Profile	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
60Hz KW Load Profile	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
Acceleration Ramp Time (seconds)	<i>Parameter unavailable</i>	15.0
Active DM1 Fault List	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
Active Ignored Engine Shutdown Faults Table	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
Active PCCnet AUX101 Device 0 Modules	<i>Parameter unavailable</i>	0
Active PCCnet AUX101 Device 1 Modules	<i>Parameter unavailable</i>	0
Active PCCnet HMI113 Annunciators	<i>Parameter unavailable</i>	0
Active PCCnet HMI220 Operator Panels	<i>Parameter unavailable</i>	0
Active PCCnet HMI320 Operator Panels	<i>Parameter unavailable</i>	0
Active Shutdown Faults List	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
Active Transition Timer (seconds)	<i>Parameter unavailable</i>	0.0

Figure 0-42 Capture file Comparison output

## CAPTURE FILE/CONTROLLER COMPARISON

Guidanz can compare a currently connected Controller to a capture file. To begin the comparison process, navigate to the Capture File add-in while connected to a controller, and select any capture files checkbox to enable the Compare to Controller button.

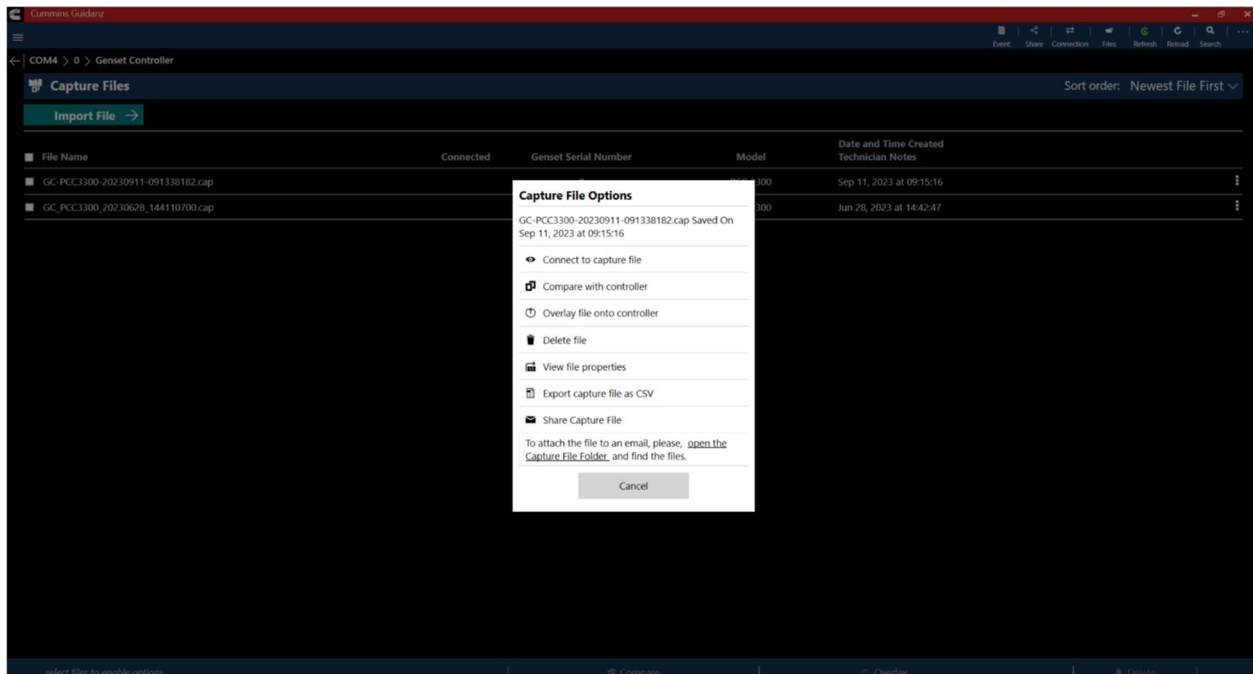


Figure 0-43 Controller to Capture file Compare.

## CAPTURE FILE/CONTROLLER COMPARISON OUTPUT

After the comparison process is completed, the Output screen will be displayed. Standard parameters will be compared directly on the output page. Users have the option to Highlight Differences, Show Same, different or all parameters; and sort the order of the parameters. Data Tables and XY Tables can be exported to CSV for comparison. Selecting to CSV will export the comparison to a zipped file with both CSV's.



Parameter Name	GC-PCC3300-20230612-160734547.cap	GC-PCC3300-20230609-124928684.cap
12 V High Battery Voltage Threshold (Vdc)	16.0	16.0
12 V Low Battery Voltage Running Threshold (Vdc)	12.0	12.0
12 V Low Battery Voltage Stopped Threshold (Vdc)	12.0	12.0
12 V Weak Battery Voltage Threshold (Vdc)	8.0	8.0
24 V High Battery Voltage Threshold (Vdc)	32.0	32.0
24 V Low Battery Voltage Running Threshold (Vdc)	24.0	24.0
24 V Low Battery Voltage Stopped Threshold (Vdc)	24.0	24.0
24 V Weak Battery Voltage Threshold (Vdc)	14.4	14.4
3 ph high conn Genset nom voltage hi limit (Vac)	32767	32767
3 ph high conn Genset nom voltage lo limit (Vac)	22500	22500
3 ph low conn Genset nom voltage hi limit (Vac)	22499	22499
3 ph low conn Genset nom voltage lo limit (Vac)	1	1
50Hz kW Load Profile	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>
60Hz kW Load Profile	Create CSV report to view datatable parameters	<a href="#">Export to CSV</a>

Figure 0-44 Capture file compare output.

## COMMISSIONING

The Commissioning pages allows users to change multiple settings at one time in an easier to read format than Device Settings. Commissioning should be used when bringing a new Gen-set online.

To begin the commissioning process, users should enable setup mode in the top right corner of the screen.

After enabling, use the left pane to navigate to the parameters required to change, or alternatively scroll through the parameters in the right pane.

After all the required changes are made, select Review changes at the bottom of the screen. If all the changes are in order, select Save changes on the next screen.

After saving, remember to disable Setup mode before exiting the commissioning page.

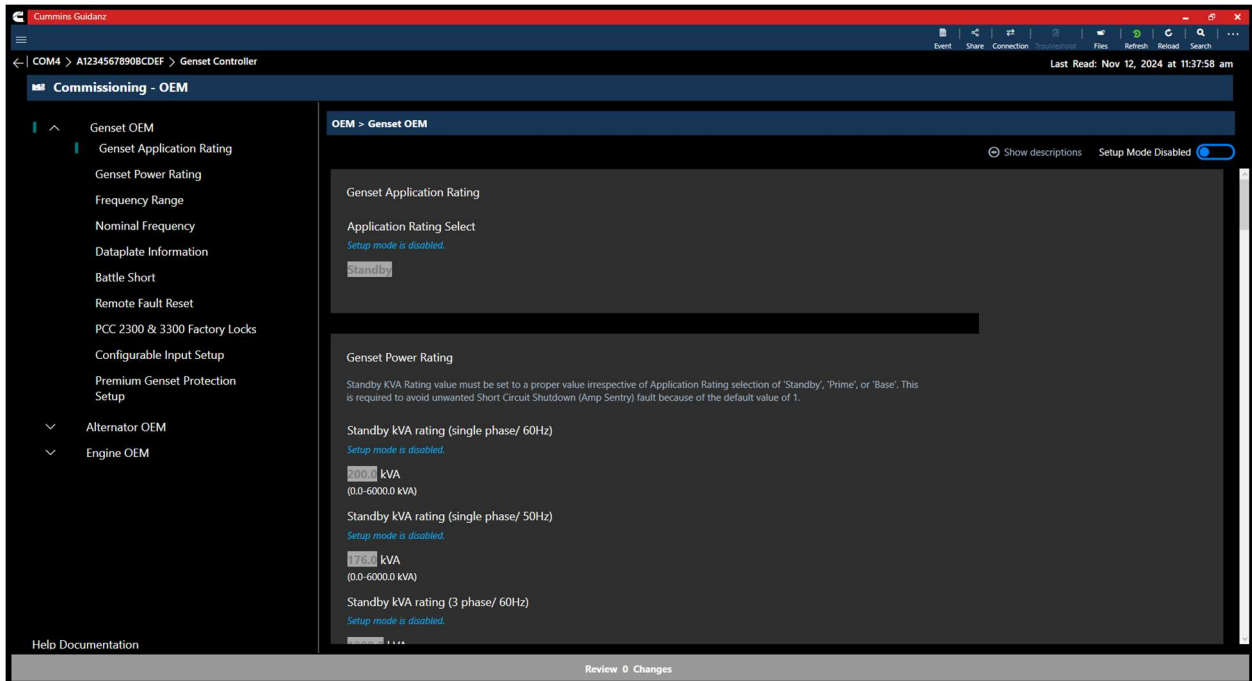


Figure 0-45 Commissioning Screen

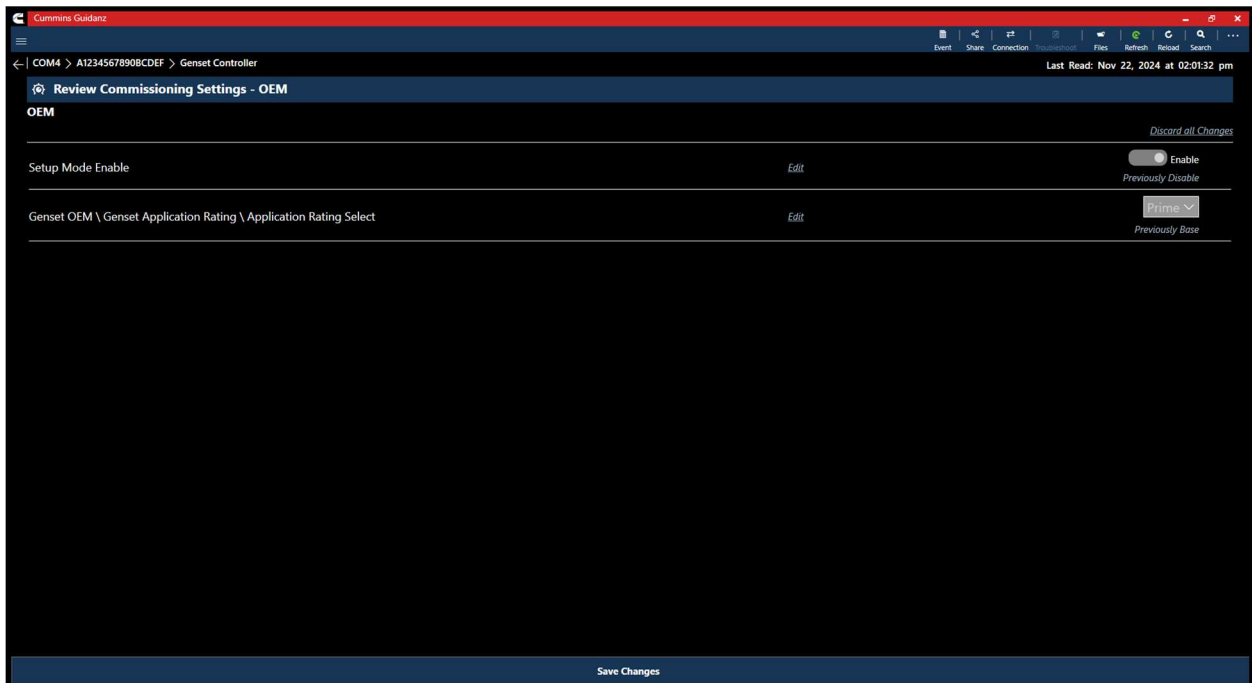


Figure 0-46 Saving changes

## SCAN FAULTS

Selecting Scan Faults from Dashboard will open the [Connecting to Controller page](#). After selecting the correct COM port, the user is taken directly to the Faults and Events page, skipping the Intake process.



This allows users to quickly view the current active faults on the controller. Selecting the back arrow will navigate to the [Equipment summary](#) page.

---

## CALIBRATION FILES

Selecting Calibration Files will open the calibration Files add-in, and display the current calibration files downloaded to the PC. Selecting the [Find Online](#) tab allows users to download the latest Incal package for the Genset Controller selected in the Dropdown.

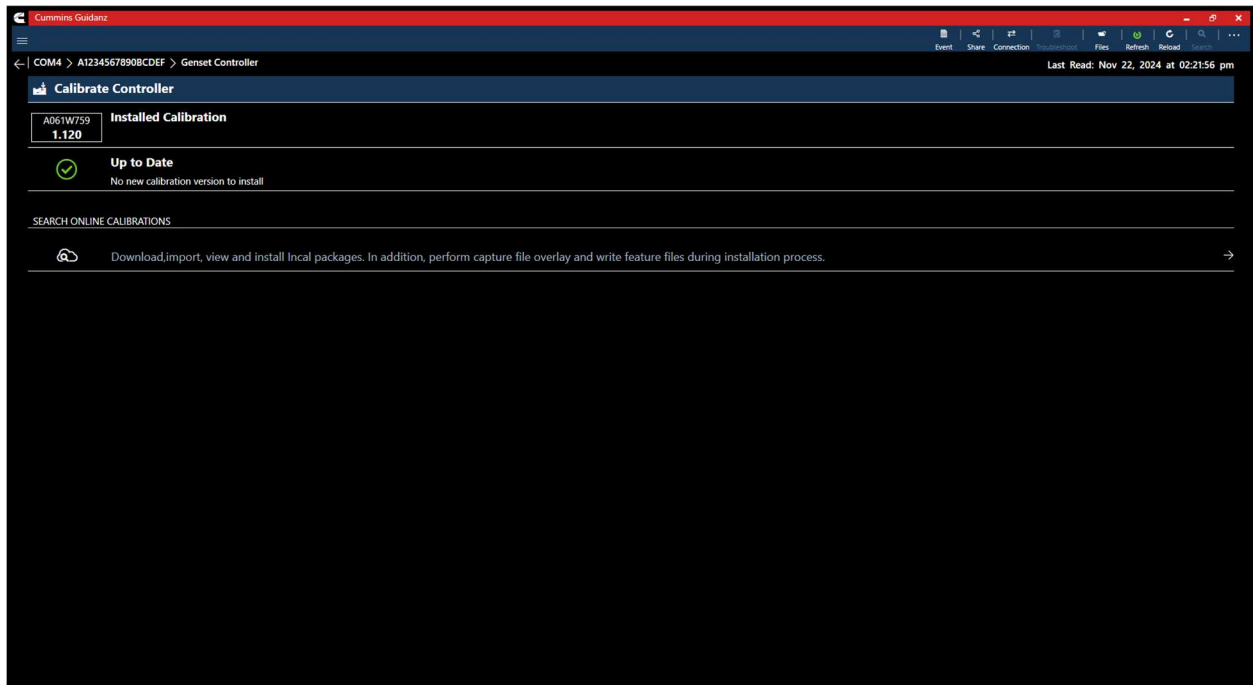


Figure 0-47 Calbrate Controller page while connected.

---

## MY CALIBRATIONS

The My calibrations tab allows users to see calibrations already downloaded or imported to the PC.

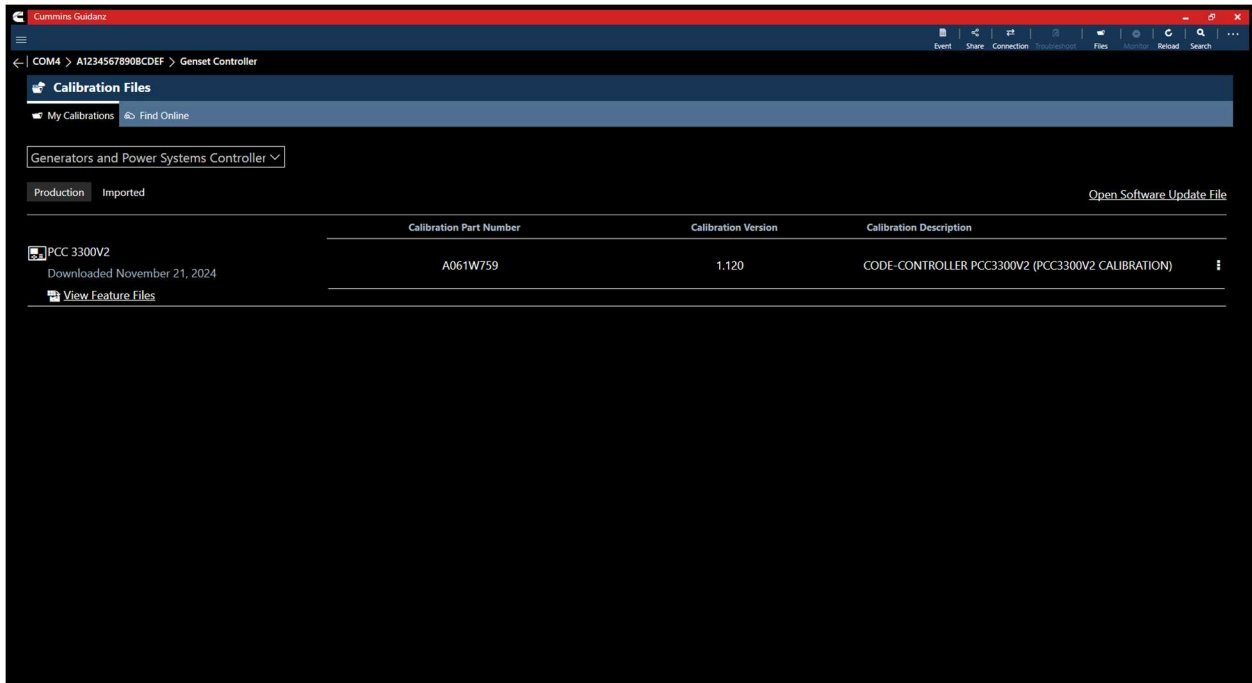


Figure 0-48 My Calibrations Page

## INCAL IMPORT

Selecting the Imported from the My Calibrations page will display imported calibrations, and allow the user to import additional INCAL packages. Note that INCAL packages must be in the .zip format to import

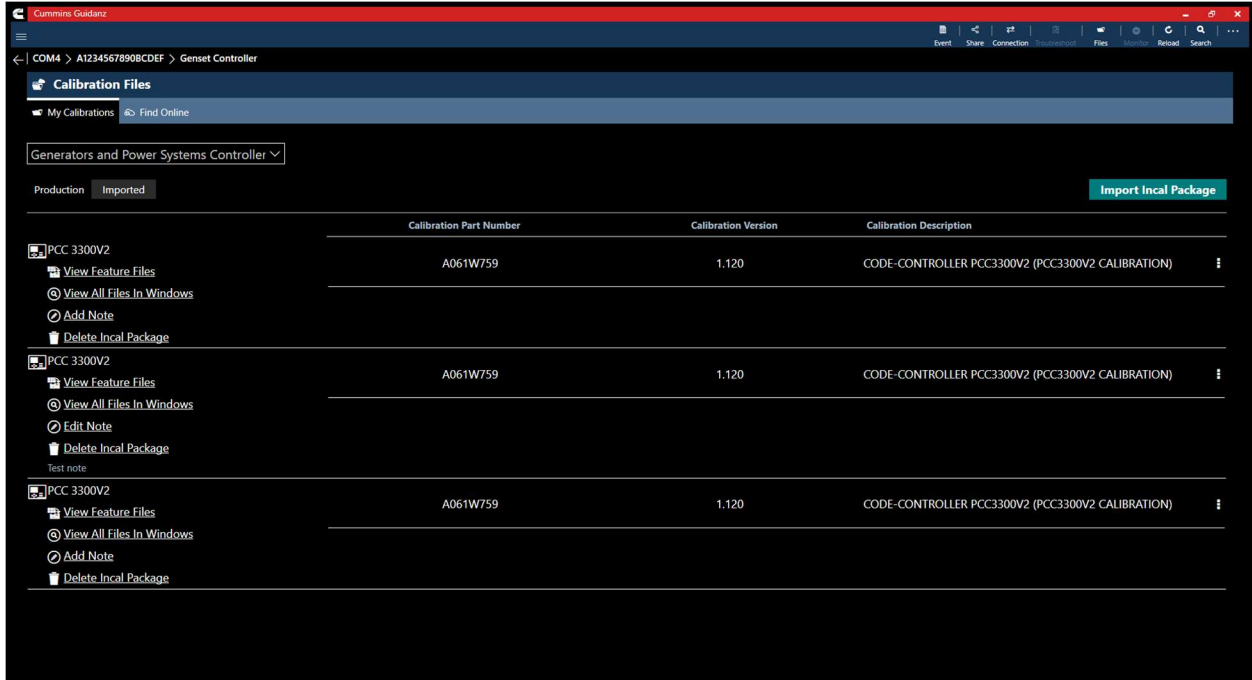


Figure 0-49 Import INCAL

---

## FIND ONLINE

Selecting the Find Online page allows Technicians to download the latest production calibration packages directly from the Cummins servers.



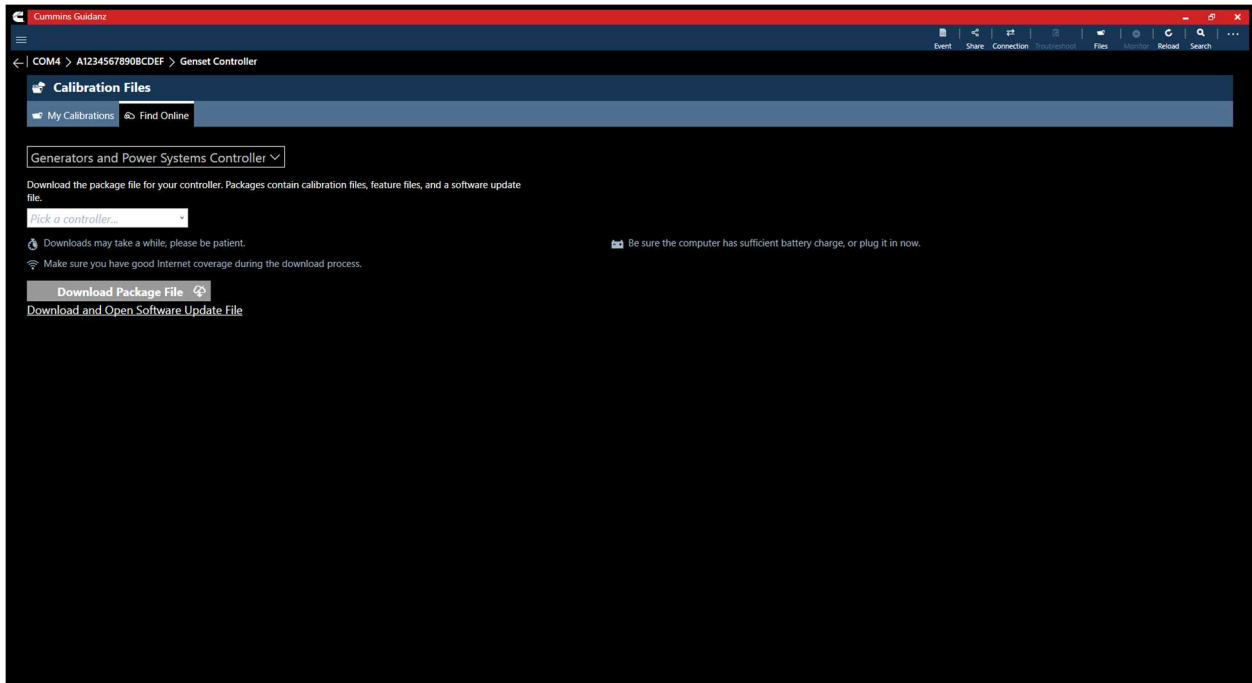


Figure 0-50 Find Online Tab

---

## SIMULATOR MODE

Selecting Simulator Mode from the Home Screen allows users to connect to PowerGen simulators for training purposes. The Simulator uses Synthetic data from Capture files to recreate the PowerGen connection experience. Analyze Equipment, History and Templates, and Scan Faults are available while in Simulator mode. Selecting Analyze Equipment allows the user to select the type of simulator they would like to connect too. All other connection options are disabled in Simulator mode. After selecting the Simulator type, users can choose to simulate with a Factory Sample or User Imported Capture file.

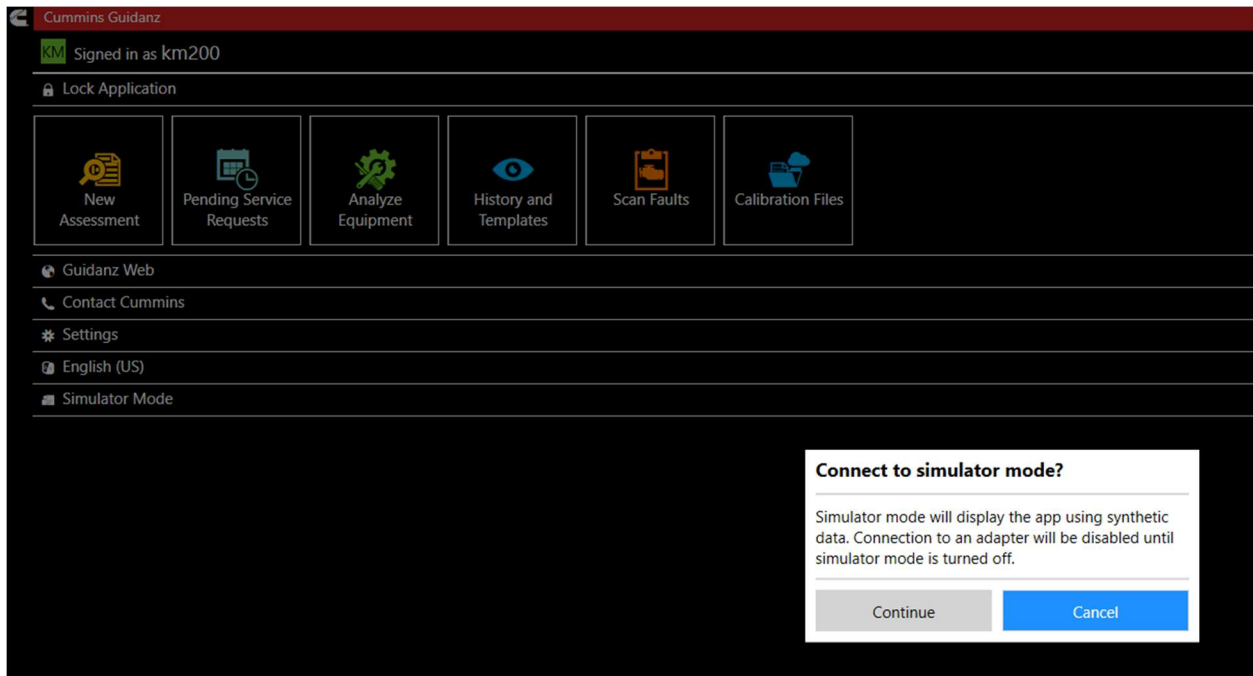


Figure 0-51 Starting Simulator mode.

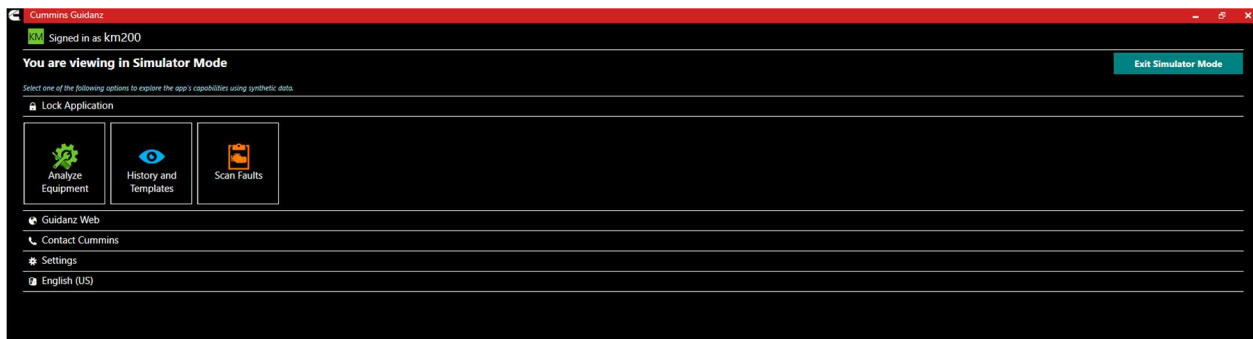


Figure 0-52 Simulator Dashboard.

After completing the Intake process, users can navigate and simulate the following areas of Guidanz:

Tool Area	Functionality
Dataplate	View
Faults	View, Reset (note that the reset process will complete, but the faults will remain visible)
Data Monitor	Monitor, Record
Device Settings	Adjust (note that changes performed during the connection will reset upon disconnect.)
Audit Trail	View

Users can exit Simulator mode by selecting the “Exit Simulator Mode” button.



## GUEST/REGISTERED USERS

### ANALYZE EQUIPMENT

#### CONNECTING TO EQUIPMENT

When Analyze Equipment or Scan Faults is selected, the tool will offer a list of supported adapters to connect to the controller. After connection, Analyze Equipment will take users to the Device Dashboard. After connection Scan Faults will take users directly to the Active faults page.

The Guidanz PC Application will look for and offer a list of available COM ports for connection.

\*Note: Brain box only official supported Serial to USB adapter

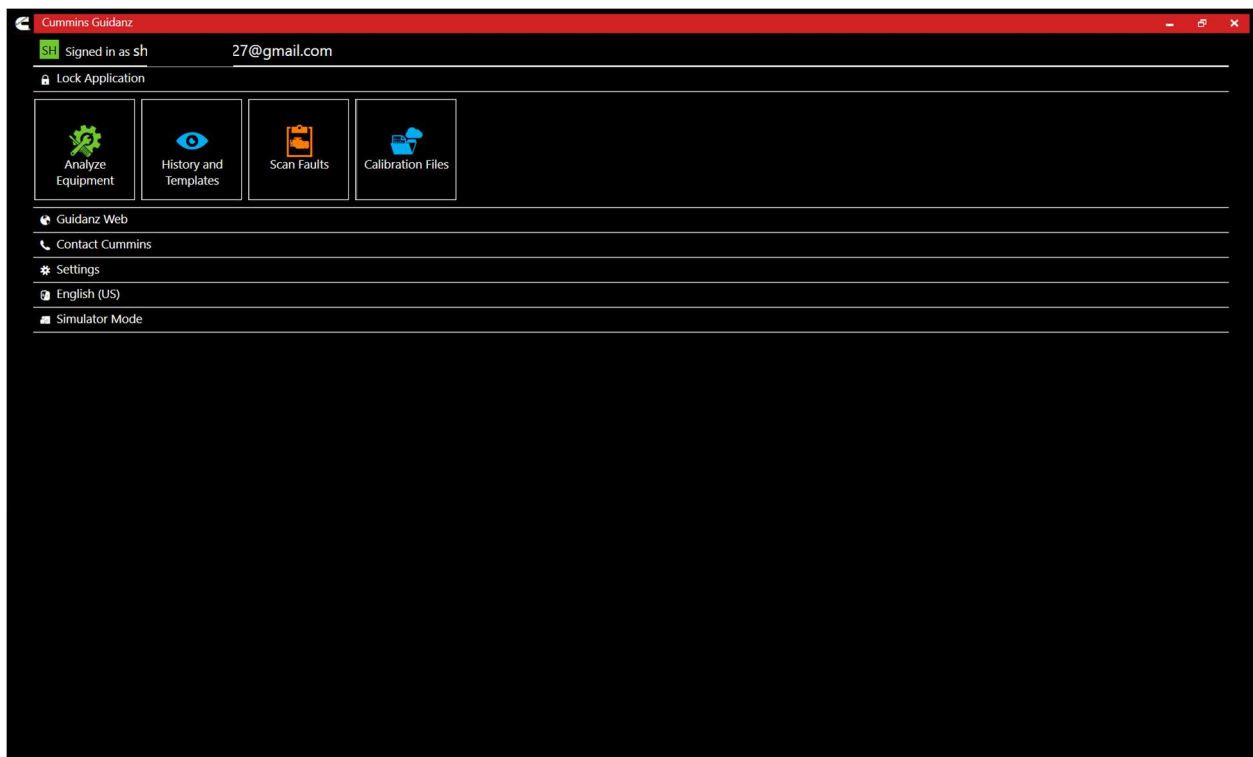


Figure 0-53 Registered User Home Screen

### DEVICE DASHBOARD

#### FAULTS

Selecting Faults on the Device Dashboard displays the Faults and Events add-in.



## ACTIVE FAULTS

By default, the Faults and Events add-in will open on the active faults tab. This tab gives the fault number, description, type, and number of occurrences of the current active faults.

Fault ID	Description	Count	Severity	Timestamp	Source Address
441	Battery 1 Voltage Data Valid but Below Normal Operational Range - Moderately Severe Level	31	Warning	Sep 27, 2000 4:14:19	220
2895	A warning fault to indicate that a PCCnet device has left the network.	35	Warning	Sep 27, 2000 4:13:34	220
1454	genset breaker position contact feedback has failed	17	Warning	Sep 27, 2000 4:13:21	220
1453	Generator Circuit Breaker Status Failed to Open - Condition Exists	17	Warning	Sep 27, 2000 4:13:19	220
1689	Indicates that power to the RTC chip has been lost and the clock is no longer accurate.	95	Warning	Sep 27, 2000 4:13:19	220
1434	Remote E-Stop Activated	29	Shutdown	Sep 27, 2000 4:13:00	220

Figure 0-54 Active Faults

## FAULT DETAILS

Clicking on an individual Cummins fault code displays the Fault Details, and the fault snapshot, if supported.

Parameter	Value
Controller Mode	Stop Emergency
Battery Voltage	13.717 Vdc
Genset Run Sequence State	Stop
Genset Run Command	Emergency Stop
Genset Run Type	Emergency Remote Start
Coolant Temperature	Not Available
Oil Pressure	Not Available
Aftercooler Temperature	Not Available
Intake Manifold Pressure 1	Not Available
Genset % Application Total kW	0.0 %
Genset L1 Power Factor	1.00 PF
Genset L2 Power Factor	1.00 PF
Genset L3 Power Factor	1.00 PF
Genset Total kVA	0 kVA
Genset Total kVAR	0 kVAR

Figure 0-55 Active Fault Snapshot



## FAULT HISTORY

Clicking on the Fault History tab allows users to view active and inactive faults.

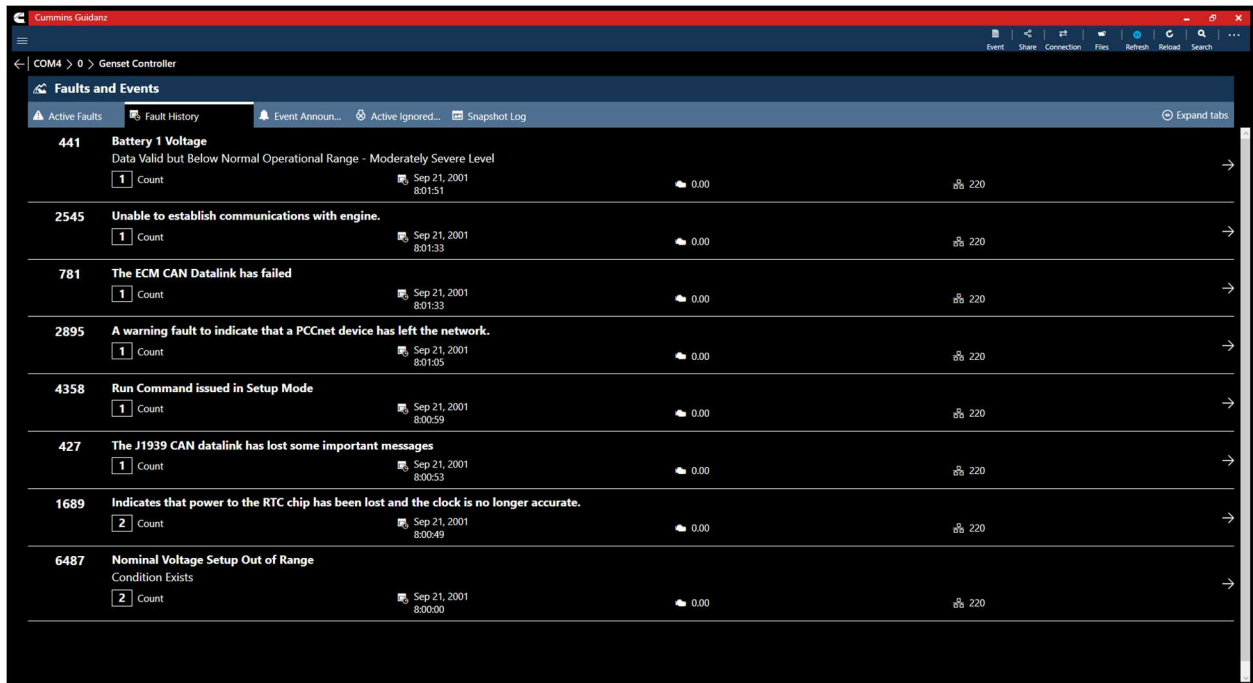


Figure 0-56 Fault History

## EVENT ANNOUNCEMENT'S

Clicking on the Event Announcement's tab allows users to acknowledge individual or all announcements.

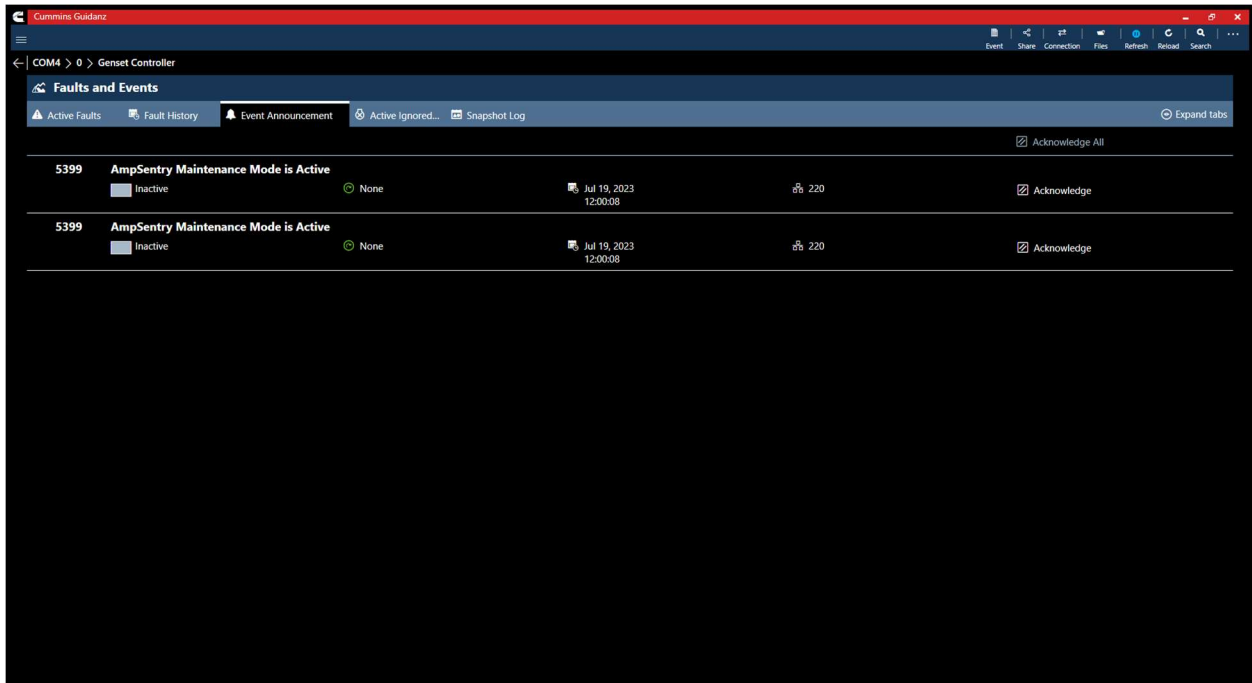


Figure 0-57 PowerGen Event Announcements

## ACTIVE IGNORED ENGINE SHUTDOWN FAULTS

Clicking on the Active Ignored Engine Shutdown tab allows the user to view the current ignored shutdown events.

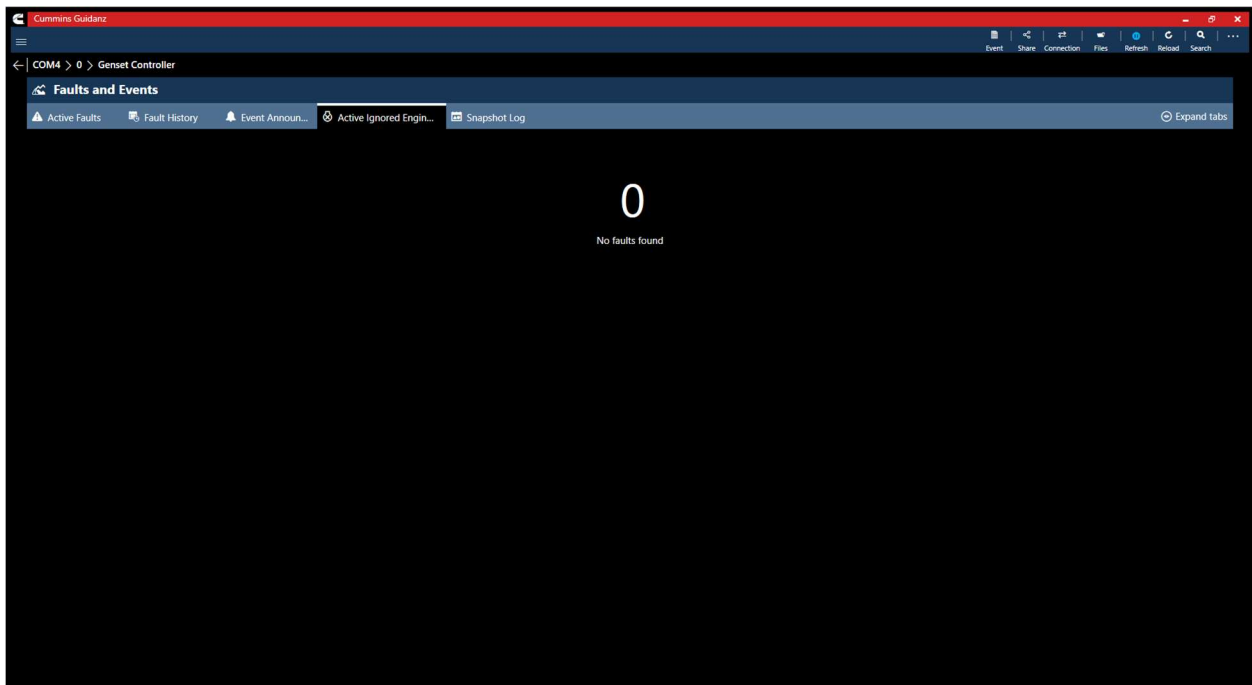


Figure 0-58 PowerGen Active Ignored Engine Shutdown



## MAINTENANCE ALARM STATUS

Click on the Maintenance Alarm Status tab allows the user to view the current active maintenance alarms.

- Note that this feature is not supported on the PCC3300 V1 controller.

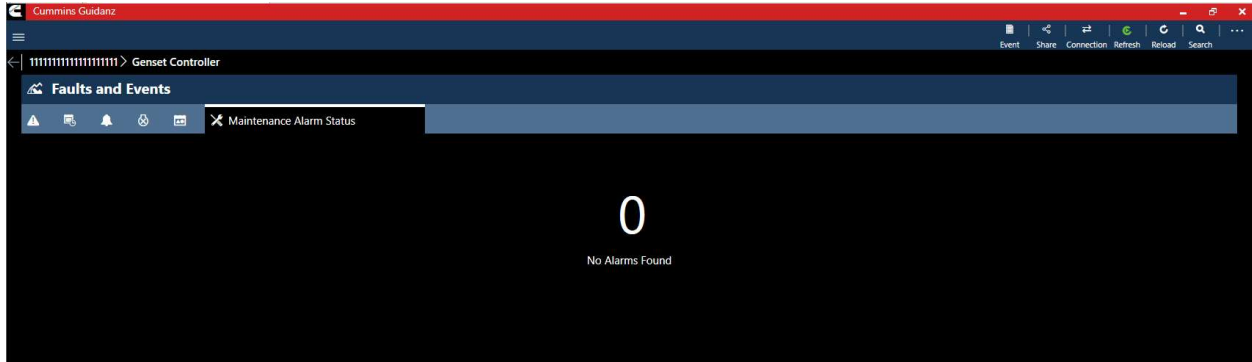


Figure 0-59 Maintenance Alarms

## SNAPSHOT LOG

Clicking on the Snapshot Log allows users to view snapshot logs and number of occurrences for all faults enabled with a snapshot.

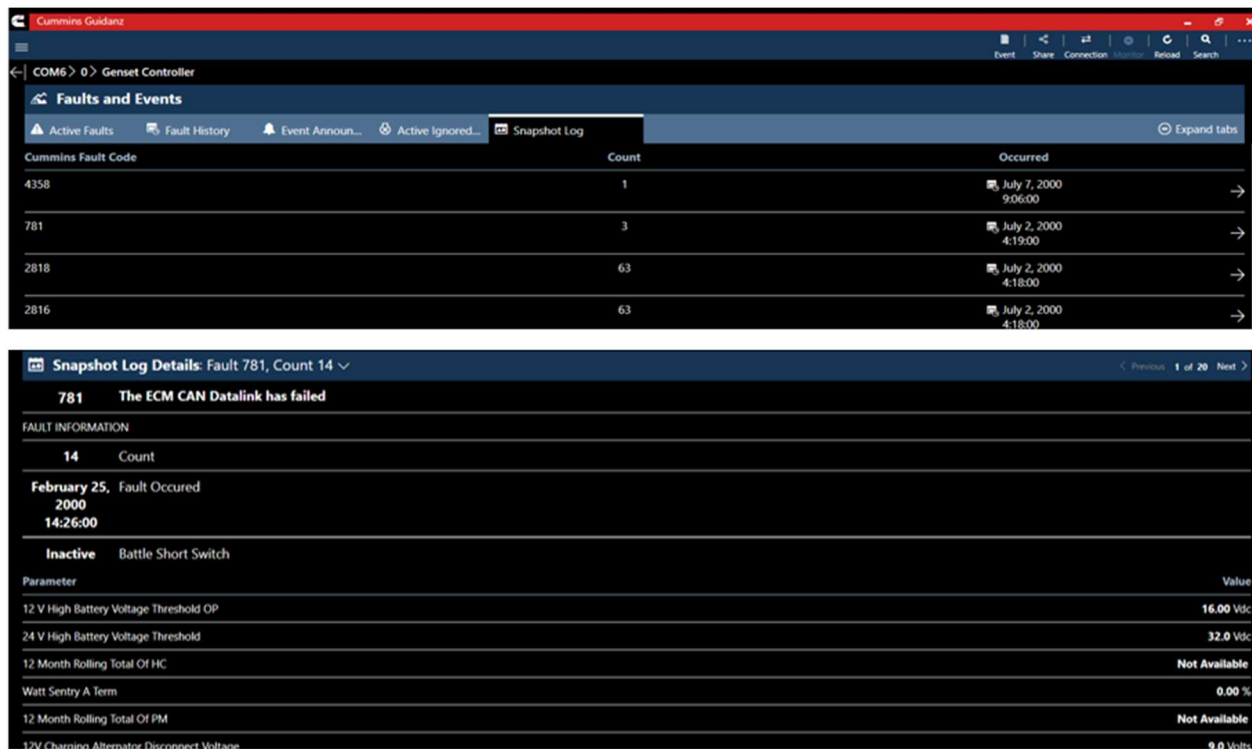


Figure 0-60 Snapshot Log

## CALIBRATE CONTROLLER



Registered users can view the current installed calibration on a connected controller and know if there is a revision update available (Internet connection required.)

## QUESTIONS OR ISSUES

### PREREQUISITES

#### REGISTRATION

- All users must have a valid username and password.
- Users who do not have a valid username and password, can [register here](#).
- 

#### SUBSCRIPTION

- Contact your local distributor, under the Software Licensing section below, to register your service location to use Cummins Guidanz Diagnostic Toolkit - Immediate Assessment feature in the US, EU, or Canada. Non-Distributor employees please contact Cummins Care.
- 

#### DATALINK ADAPTERS

- Guidanz Diagnostic Tool Kit is compatible with all standard RP1210 Datalink adapters.
- [INLINE 7](#) is a complete kit for equipment using 9-pin, 6-pin, and 3-pin cables. It supports USB, Wi-Fi, and Bluetooth. It works with INSITE and Guidanz Mobile/Windows (Guest, Service, and Immediate Assessment subscribers). *\*Not compatible with Power Generation Controllers.*
  - To purchase the INLINE 7 kit, [CLICK HERE](#)
- **ONAN HARNESS KIT** is a complete kit for Power Generation Controller applications. It connects to various commercial controllers including PCC3300 V1 and PCC3300 V2. It works with InPower and Guidanz Diagnostic Toolkit PC Application (Power Plus Subscribers).
  - To purchase the Onan Harness kit, [CLICK HERE](#)

### SUPPORTED ENGINE PROGRAMS

The Guidanz Diagnostic Toolkit PC Application supports all Cummins J1939 compliant engines. Engines made prior to 2007, or those that use J1708 protocol are not supported.

**Table 1 Non-supported Engine programs**

Engine Program	ECM		Engine Program	ECM
480C-E	CM552		ISM	CM570
B5.9G	CM420		ISM - CM870	CM870
C Gas Plus/B Gas Plus	CM556		ISM - CM875	CM875
C8.3G	CM420		ISM - Fuel Control Module - CM570	CM570
CELECT	ECM-B		KTA19, G855 CM558 G Drive	CM558
CELECT Plus	ECM-C		L Gas Plus	CM556
CELECT Plus Industrial	ECM-C		L10G	CM420
Centinel	CM400		PIM	CM550





CENTRY	CM400		QSB5.9/44, 5.9/30, 4.5/30, 3.9/30	CM550
Gas Compression GTA3.9/5.9/8.3GC, KTA19/38GC - SSM558/CM556/CM2 358	CM556		QSC8.3/QSL9	CM554
	SSM558			CM500
ISB	CM550		QSK19/23/45/60/78	CM500
ISB - CM850	CM850		QSK19G/38G/60G, QSV81/91 - CM700/SSM558/CM2358	CM700, SSM558
ISB Daimler Chrysler	CM551			CM2358
ISBe (4 and 6 Cylinder)	CM800		QSM11	CM570
ISBe2/3 - CM850	CM850		QST30	CM552
ISBe4 (4 and 6 cylinder)	CM850		QST30 - Power Gen	CM552
ISC / Transit Bus ISL8.3 - CM850	CM850		QSX15	CM570
ISC/ISL	CM554		Signature/ISX	CM570
ISL8.9 - CM850	CM850		Signature/ISX - CM870	CM870
ISLe4 (6 cylinder)	CM850			

---

CONTACT CUMMINS

<https://www.cummins.com/support/digital-products-and-services-support>